
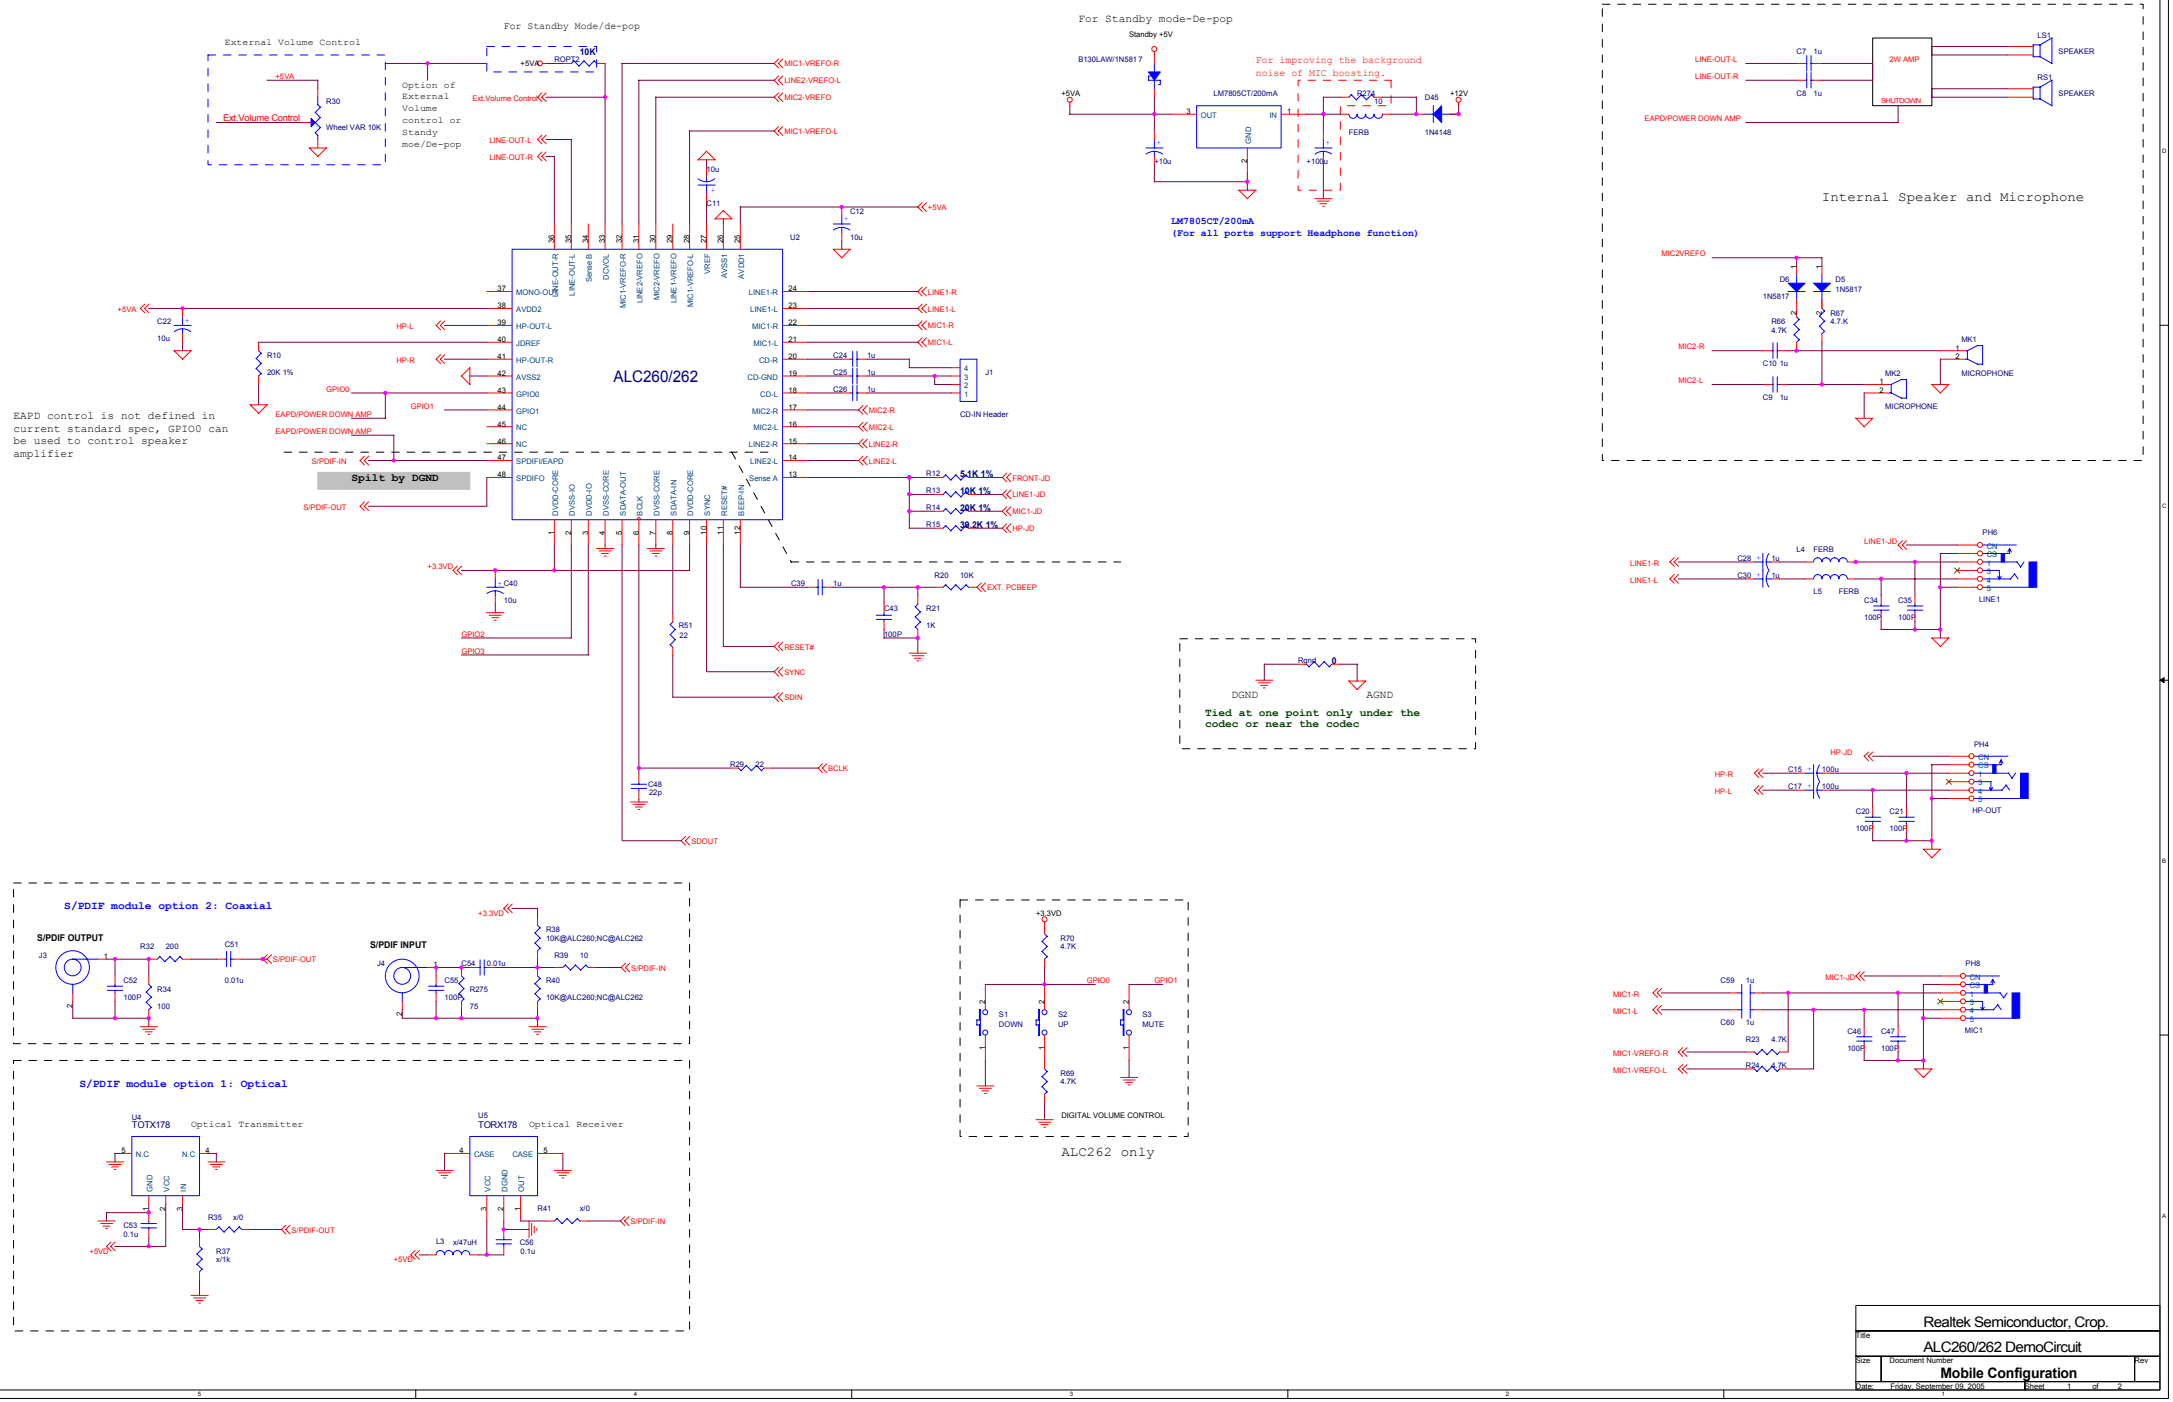


Realtek Semiconductor, Crop.		
Title: ALC260/262 DemoCircuit		
Size	Document Number: Mobile Configuration	Rev
Date: Friday, September 09, 2005	Sheet 1 of 2	

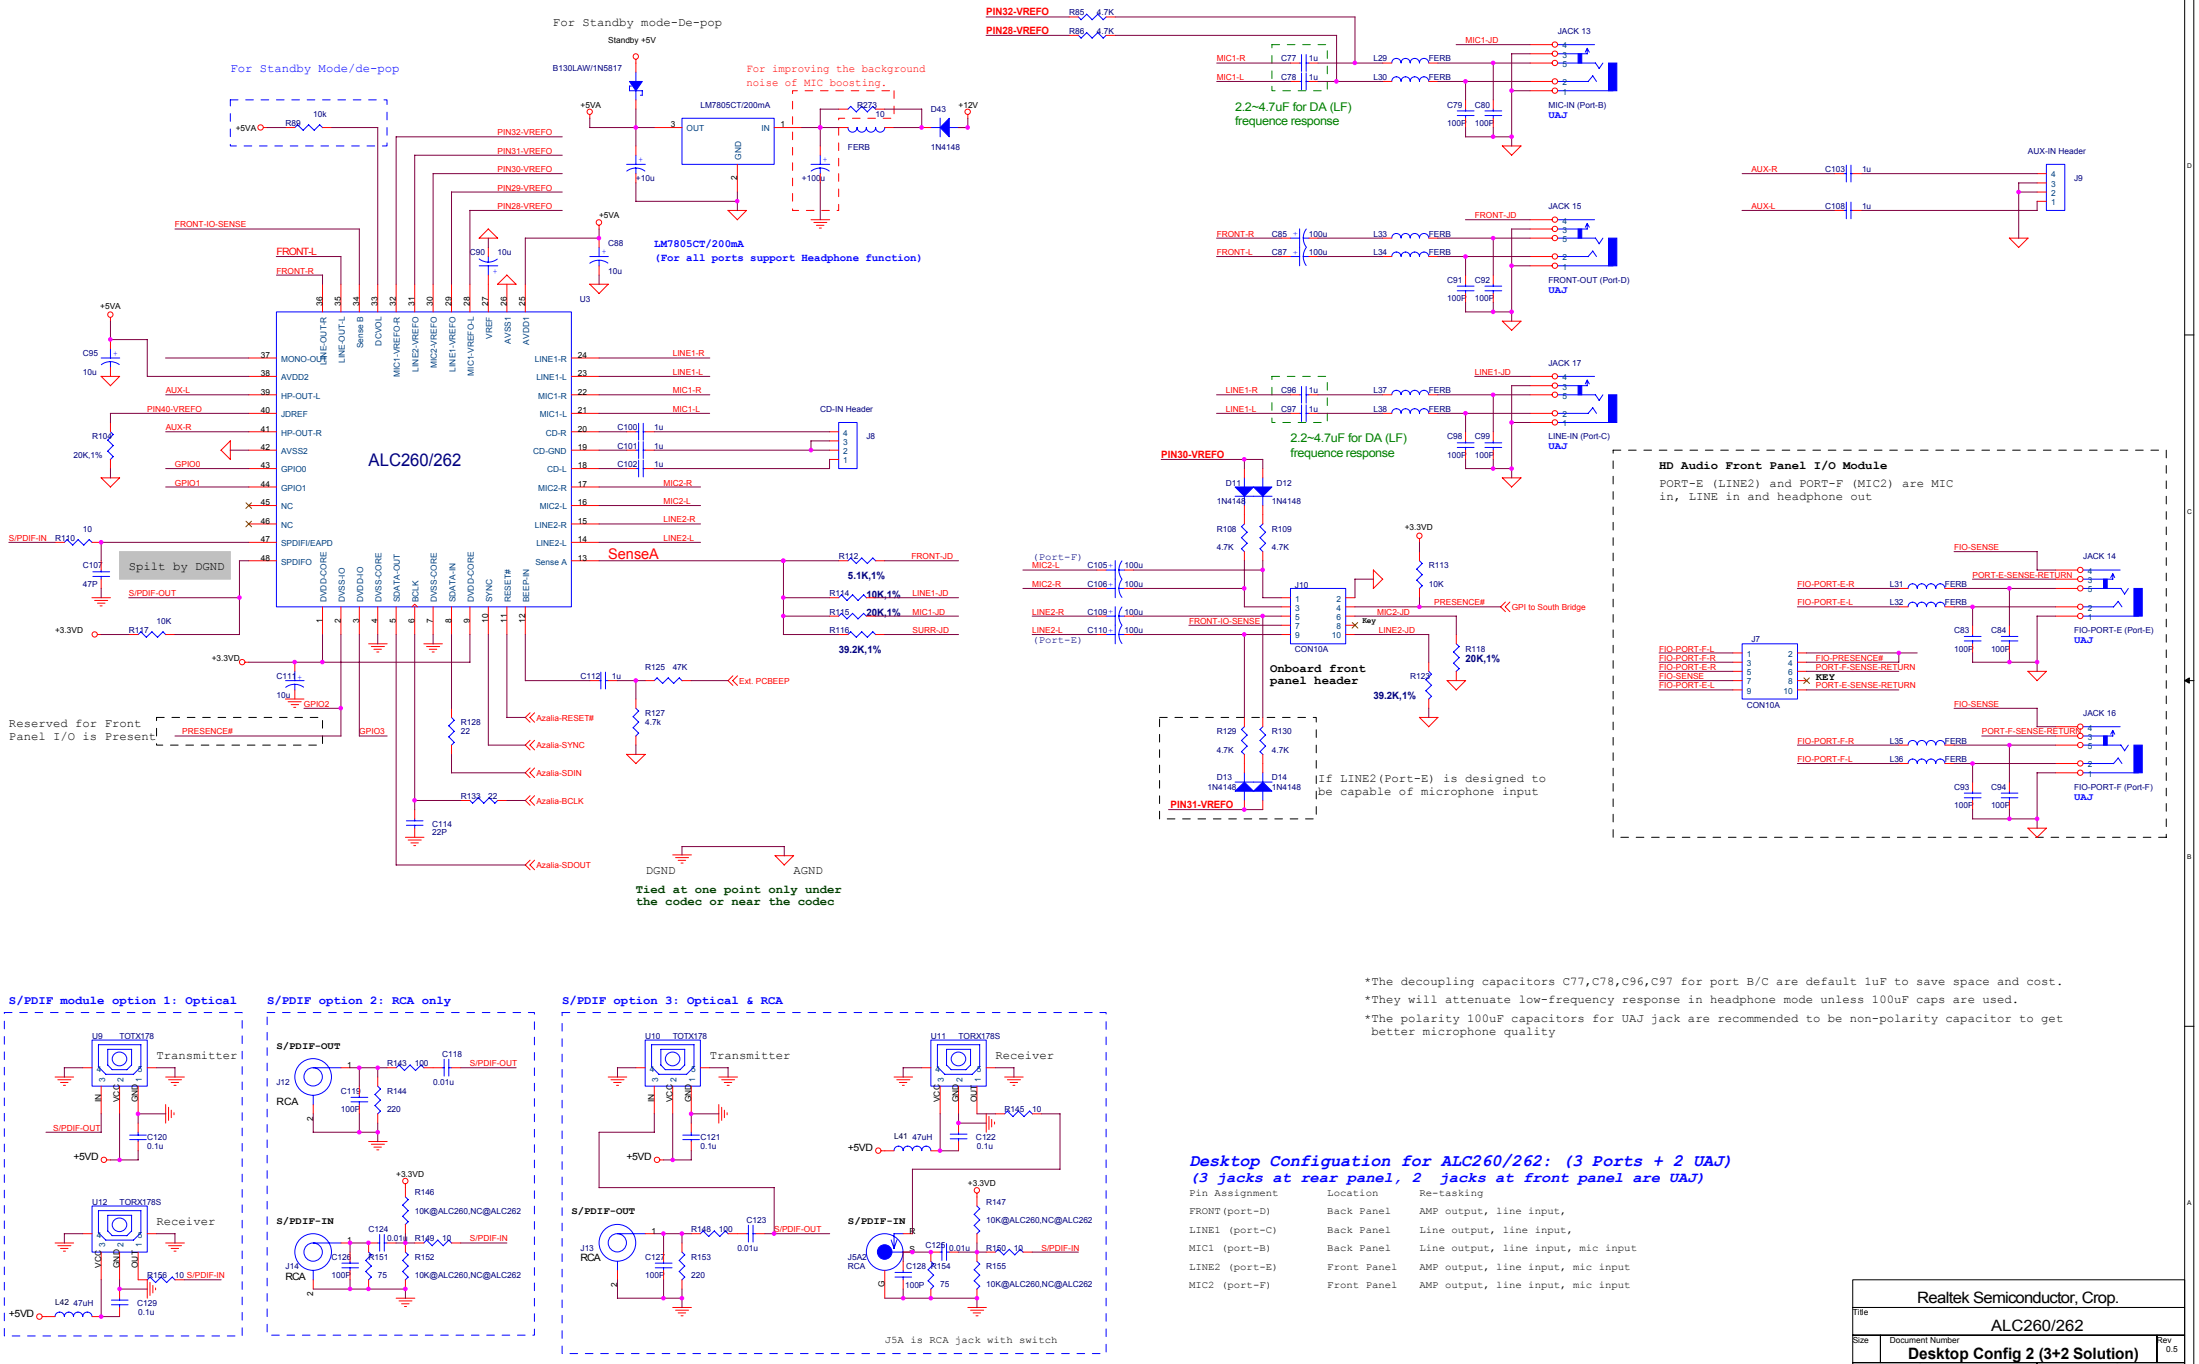

*The decoupling capacitors C77,C78,C96,C97 for port B/C are default 1uF to save space and cost.
*They will attenuate low-frequency response in headphone mode unless 100uF caps are used.
*The polarity 100uF capacitors for UAJ jack are recommended to be non-polarity capacitor to get better microphone quality

Desktop Configuation for ALC260/262: (3 Ports + 2 UAJ)
(3 jacks at rear panel, 2 jacks at front panel are UAJ)

Pin Assignment	Location	Re-tasking
FRONT(port-D)	Back Panel	AMP output, line input,
LINE1 (port-C)	Back Panel	Line output, line input,
MIC1 (port-B)	Back Panel	Line output, line input, mic input
LINE2 (port-E)	Front Panel	AMP output, line input, mic input
MIC2 (port-F)	Front Panel	AMP output, line input, mic input

Realtek Semiconductor, Crop.
Title: ALC260/262
Size: Document Number: Desktop Config 2 (3+2 Solution) Rev: 0.5
Date: Friday, September 09, 2005 Sheet 2 of 2