

REALTEK

RTL8111CP-VB-GR

INTEGRATED GIGABIT ETHERNET CONTROLLER FOR PCI EXPRESS™ APPLICATIONS

DATASHEET

(CONFIDENTIAL: Development Partners Only)

Rev. 1.4

29 July 2008

Track ID: JATR-1076-21



Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

www.realtek.com.tw

COPYRIGHT

©2008 Realtek Semiconductor Corp. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realtek Semiconductor Corp.

DISCLAIMER

Realtek provides this document “as is”, without warranty of any kind, neither expressed nor implied, including, but not limited to, the particular purpose. Realtek may make improvements and/or changes in this document or in the product described in this document at any time. This document could include technical inaccuracies or typographical errors.

TRADEMARKS

Realtek is a trademark of Realtek Semiconductor Corporation. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

LICENSE

This product is covered by one or more of the following patents: US5,307,459, US5,434,872, US5,732,094, US6,570,884, US6,115,776, and US6,327,625.

USING THIS DOCUMENT

This document is intended for the software engineer’s reference and provides detailed programming information.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide. In that event, please contact your Realtek representative for additional information that may help in the development process.

REVISION HISTORY

Revision	Release Date	Summary
1.0	2007/05/23	First release.
1.1	2007/12/20	Changed Table 9 GPIO Pins, page 7. Added section 7 Switching Regulator, page 21. Changed Table 18 Absolute Maximum Ratings, page 30. Added Table 21 Oscillator Requirements, page 31. Changed Table 29 Ordering Information, page 40.
1.2	2008/03/28	Changed Table 4 Transceiver Interface, page 5. Added section 6.2.6 Customized LED, page 11. Changed Table 16 Inductor and Capacitor Parts List, page 22. Added section 7.5 Efficiency Measurement, page 28.
1.3	2008/05/09	Changed Table 6 Regulator & Reference, page 6. Changed section 7.4 Typical Switching Regulator PCB Layout, page 27. Changed Table 20 Crystal Requirements, page 30. Changed Table 21 Oscillator Requirements, page 31.
1.4	2008/07/29	Updated licensing information.

Table of Contents

1. GENERAL DESCRIPTION.....	1
2. FEATURES.....	2
3. SYSTEM APPLICATIONS.....	2
4. PIN ASSIGNMENTS	3
4.1. PACKAGE IDENTIFICATION.....	3
5. PIN DESCRIPTIONS.....	4
5.1. POWER MANAGEMENT/ISOLATION	4
5.2. PCI EXPRESS INTERFACE	4
5.3. EEPROM	5
5.4. TRANSCEIVER INTERFACE.....	5
5.5. CLOCK	5
5.6. REGULATOR & REFERENCE	6
5.7. LEDs	6
5.8. POWER & GROUND	6
5.9. GPIO PINS	7
5.10. SMBUS	7
5.11. JTAG	7
5.12. NC (NOT CONNECTED) PINS	7
6. FUNCTIONAL DESCRIPTION.....	8
6.1. PCI EXPRESS BUS INTERFACE.....	8
6.1.1. PCI Express Transmitter	8
6.1.2. PCI Express Receiver	8
6.2. LED FUNCTIONS.....	8
6.2.1. Link Monitor.....	8
6.2.2. Rx LED	9
6.2.3. Tx LED	9
6.2.4. Tx/Rx LED	10
6.2.5. LINK/ACT LED	10
6.2.6. Customized LED Configuration	11
6.3. PHY TRANSCEIVER	12
6.3.1. PHY Transmitter.....	12
6.3.2. PHY Receiver	12
6.4. NEXT PAGE	13
6.5. EEPROM INTERFACE.....	13
6.6. POWER MANAGEMENT.....	14
6.7. VITAL PRODUCT DATA (VPD).....	16
6.8. RECEIVE-SIDE SCALING (RSS)	17
6.8.1. Receive-Side Scaling (RSS) Initialization.....	17
6.8.2. RSS Operation	18
6.9. ALERT SPECIFICATION FORMAT (ASF).....	18
6.9.1. Security-Extensions	18
6.9.2. ASF (Alert Standard Format) 2.0 Support	19
7. SWITCHING REGULATOR.....	21
7.1. PCB LAYOUT.....	21
7.2. INDUCTOR AND CAPACITOR PARTS LIST	22
7.3. MEASUREMENT CRITERIA.....	23
7.4. TYPICAL SWITCHING REGULATOR PCB LAYOUT	27

7.5.	EFFICIENCY MEASUREMENT	28
7.6.	POWER SEQUENCE	29
8.	CHARACTERISTICS.....	30
8.1.	ABSOLUTE MAXIMUM RATINGS	30
8.2.	RECOMMENDED OPERATING CONDITIONS	30
8.3.	CRYSTAL REQUIREMENTS.....	30
8.4.	OSCILLATOR REQUIREMENTS	31
8.5.	THERMAL CHARACTERISTICS.....	31
8.6.	DC CHARACTERISTICS.....	31
8.7.	AC CHARACTERISTICS.....	32
8.7.1.	<i>Serial EEPROM Interface Timing.....</i>	<i>32</i>
8.8.	PCI EXPRESS BUS PARAMETERS.....	33
8.8.1.	<i>Differential Transmitter Parameters.....</i>	<i>33</i>
8.8.2.	<i>Differential Receiver Parameters.....</i>	<i>34</i>
8.8.3.	<i>REFCLK Parameters.....</i>	<i>34</i>
8.8.4.	<i>Auxiliary Signal Timing Parameters.....</i>	<i>38</i>
9.	MECHANICAL DIMENSIONS.....	39
10.	ORDERING INFORMATION.....	40

List of Tables

TABLE 1.	POWER MANAGEMENT/ISOLATION	4
TABLE 2.	PCI EXPRESS INTERFACE.....	4
TABLE 3.	EEPROM	5
TABLE 4.	TRANSCEIVER INTERFACE	5
TABLE 5.	CLOCK	5
TABLE 6.	REGULATOR & REFERENCE	6
TABLE 7.	LEDs	6
TABLE 8.	POWER & GROUND	6
TABLE 9.	GPIO PINS	7
TABLE 10.	SMBUS	7
TABLE 11.	JTAG	7
TABLE 12.	NC (NOT CONNECTED) PINS	7
TABLE 13.	LED SELECT (IO REGISTER OFFSET 17H~18H).....	11
TABLE 14.	CUSTOMIZED LED	11
TABLE 15.	EEPROM INTERFACE	13
TABLE 16.	INDUCTOR AND CAPACITOR PARTS LIST	22
TABLE 17.	POWER SEQUENCE PARAMETER	29
TABLE 18.	ABSOLUTE MAXIMUM RATINGS	30
TABLE 19.	RECOMMENDED OPERATING CONDITIONS	30
TABLE 20.	CRYSTAL REQUIREMENTS.....	30
TABLE 21.	OSCILLATOR REQUIREMENTS	31
TABLE 22.	THERMAL CHARACTERISTICS.....	31
TABLE 23.	DC CHARACTERISTICS	31
TABLE 24.	EEPROM ACCESS TIMING PARAMETERS	32
TABLE 25.	DIFFERENTIAL TRANSMITTER PARAMETERS	33
TABLE 26.	DIFFERENTIAL RECEIVER PARAMETERS.....	34
TABLE 27.	REFCLK PARAMETERS	34
TABLE 28.	AUXILIARY SIGNAL TIMING PARAMETERS.....	38
TABLE 29.	ORDERING INFORMATION	40

List of Figures

FIGURE 1.	PIN ASSIGNMENTS	3
FIGURE 2.	RX LED	9
FIGURE 3.	TX LED	9
FIGURE 4.	Tx/Rx LED	10
FIGURE 5.	LINK/ACT LED	10
FIGURE 6.	SWITCHING REGULATOR ILLUSTRATION	21
FIGURE 7.	INPUT VOLTAGE OVERSHOOT <4V (GOOD).....	23
FIGURE 8.	INPUT VOLTAGE OVERSHOOT >4V (BAD)	23
FIGURE 9.	CERAMIC 22 μ F 1210 (X5R) (GOOD).....	24
FIGURE 10.	CERAMIC 22 μ F 0805 (Y5V) (BAD)	24
FIGURE 11.	ELECTROLYTIC 100 μ F (RIPPLE TOO HIGH).....	25
FIGURE 12.	4R7GTSD32 (GOOD)	26
FIGURE 13.	1 μ H BEAD (BAD)	26
FIGURE 14.	TYPICAL SWITCHING REGULATOR PCB LAYOUT (TOP LAYER).....	27
FIGURE 15.	TYPICAL SWITCHING REGULATOR PCB LAYOUT (BOTTOM LAYER)	27
FIGURE 16.	SWITCHING REGULATOR EFFICIENCY MEASUREMENT CHECKPOINT	28
FIGURE 17.	POWER SEQUENCE	29
FIGURE 18.	SERIAL EEPROM INTERFACE TIMING.....	32
FIGURE 19.	SINGLE-ENDED MEASUREMENT POINTS FOR ABSOLUTE CROSS POINT AND SWING.....	36
FIGURE 20.	SINGLE-ENDED MEASUREMENT POINTS FOR DELTA CROSS POINT	36
FIGURE 21.	SINGLE-ENDED MEASUREMENT POINTS FOR RISE AND FALL TIME MATCHING	36
FIGURE 22.	DIFFERENTIAL MEASUREMENT POINTS FOR DUTY CYCLE AND PERIOD	37
FIGURE 23.	DIFFERENTIAL MEASUREMENT POINTS FOR RISE AND FALL TIME	37
FIGURE 24.	DIFFERENTIAL MEASUREMENT POINTS FOR RINGBACK.....	37
FIGURE 25.	REFERENCE CLOCK SYSTEM MEASUREMENT POINT AND LOADING	38
FIGURE 26.	AUXILIARY SIGNAL TIMING.....	38

1. General Description

The Realtek RTL8111CP-VB-GR Gigabit Ethernet controller combines a triple-speed IEEE 802.3 compliant Media Access Controller (MAC) with a triple-speed Ethernet transceiver, PCI Express bus controller, and embedded memory. With state-of-the-art DSP technology and mixed-mode signal technology, the RTL8111CP offers high-speed transmission over CAT 5 UTP cable or CAT 3 UTP (10Mbps only) cable. Functions such as Crossover Detection & Auto-Correction, polarity correction, adaptive equalization, cross-talk cancellation, echo cancellation, timing recovery, and error correction are implemented to provide robust transmission and reception capability at high speeds.

The RTL8111CP is compliant with the IEEE 802.3u specification for 10/100Mbps Ethernet and the IEEE 802.3ab specification for 1000Mbps Ethernet. It also supports an auxiliary power auto-detect function, and will auto-configure related bits of the PCI power management registers in PCI configuration space.

Advanced Configuration Power management Interface (ACPI)—power management for modern operating systems that are capable of Operating System-directed Power Management (OSPM)—is supported to achieve the most efficient power management possible. PCI MSI (Message Signaled Interrupt) and MSI-X are also supported.

In addition to the ACPI feature, remote wake-up (including AMD Magic Packet™ and Microsoft® Wake-up frame) is supported in both ACPI and APM (Advanced Power Management) environments. To support WOL from a deep power down state (e.g., D3cold, i.e. main power is off and only auxiliary exists), the auxiliary power source must be able to provide the needed power for the RTL8111CP.

The RTL8111CP is fully compliant with Microsoft® NDIS5, NDIS6(IPv4, IPv6, TCP, UDP) Checksum and Segmentation Task-offload(Large send and Giant send) features, and supports IEEE 802 IP Layer 2 priority encoding and IEEE 802.1Q Virtual bridged Local Area Network (VLAN). The above features contribute to lowering CPU utilization, especially benefiting performance when in operation on a network server.

The RTL8111CP supports Receive Side Scaling (RSS) to hash incoming TCP connections and load-balance received data processing across multiple CPUs. RSS improves the number of transactions per second and number of connections per second, for increased network throughput.

Alert Specification Format (ASF 2.0) is also supported to provide system manageability in OS-absent environments. The ASF defines remote control and alerting interfaces that serve managed PCs in OS-absent states. With the ASF capability, we are able to minimize on-site I/T maintenance, to improve system availability, and also to control power management remotely.

The device also features inter-connect PCI Express technology. PCI Express is a high-bandwidth, low pin count, serial, interconnect technology that offers significant improvements in performance over conventional PCI and also maintains software compatibility with existing PCI infrastructure. The device embeds an adaptive equalizer in the PCIe PHY for ease of system integration and excellent link quality. The equalizer enables the length of the PCB traces to reach 40 inches.

The RTL8111CP is suitable for multiple market segments and emerging applications, such as desktop, mobile, workstation, server, communications platforms, and embedded applications.

2. Features

- Integrated 10/100/1000 transceiver
- Auto-Negotiation with Next Page capability
- Supports PCI Express™ 1.1
- Supports pair swap/polarity/skew correction
- Crossover Detection & Auto-Correction
- Wake-On-LAN and remote wake-up support
- Microsoft® NDIS5, NDIS6 Checksum Offload (IPv4, IPv6, TCP, UDP) and Segmentation Task-offload (Large send and Giant send) support
- Supports Full Duplex flow control (IEEE 802.3x)
- Fully compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Supports Four Customizable LEDs
- Supports IEEE 802.1P Layer 2 Priority Encoding
- Supports IEEE 802.1Q VLAN tagging
- Serial EEPROM
- Transmit/Receive on-chip buffer support
- Supports power down/link down power saving
- Supports PCI MSI (Message Signaled Interrupt) and MSI-X
- Supports Alert Specification Format 2.0 (ASF2.0)
- Supports Receive-Side Scaling (RSS)
- 64-pin QFN package (Green package)
- Embeds an adaptive equalizer in PCI express PHY (PCB traces to reach 40 inches)

3. System Applications

- PCI Express™ Gigabit Ethernet on Motherboard, Notebook, or Embedded system

4. Pin Assignments

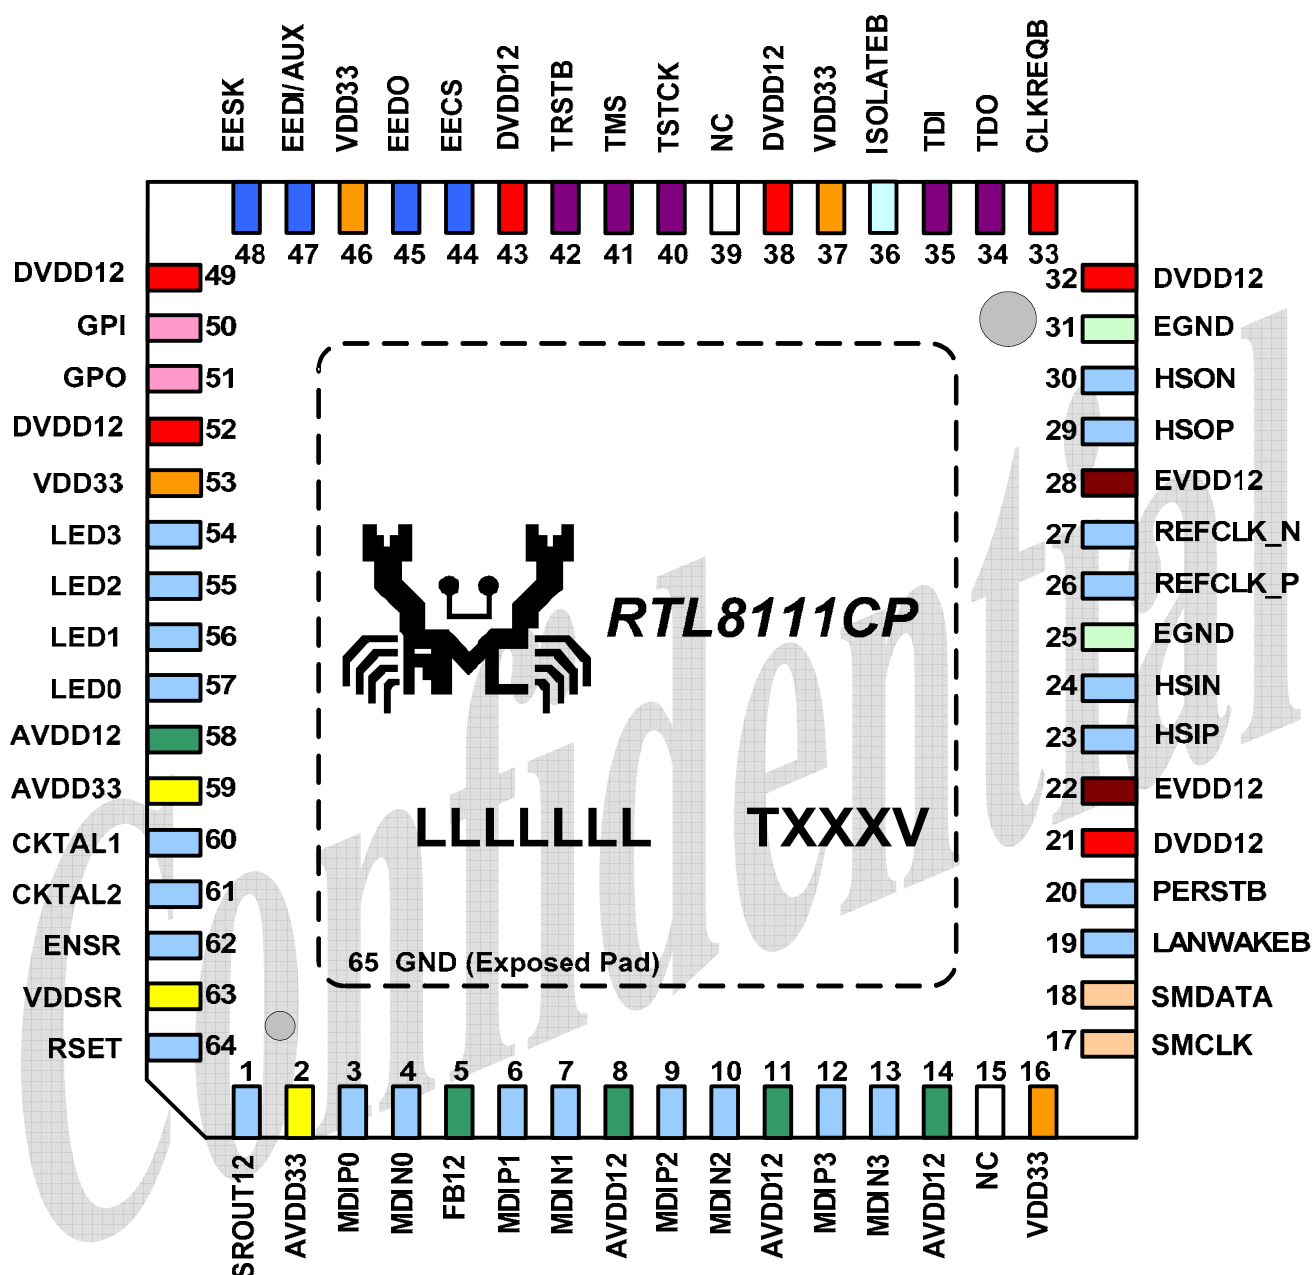


Figure 1. Pin Assignments

4.1. Package Identification

'Green' package is indicated by a 'G' in the location marked 'T' in Figure 1. The version is shown in the location marked 'V'.

5. Pin Descriptions

The signal type codes below are used in the following tables:

I: Input

O: Output

P: Power

G: Ground

T/S: Tri-State bi-directional input/output pin

S/T/S: Sustained Tri-State

O/D: Open Drain

5.1. Power Management/Isolation

Table 1. Power Management/Isolation

Symbol	Type	Pin No	Description
LANWAKEB	O/D	19	Power Management Event: Open drain, active low. Used to reactivate the PCI Express slot's main power rails and reference clocks.
ISOLATEB	I	36	Isolate Pin: Active low. Used to isolate the RTL8111CP from the PCI Express bus. The RTL8111CP will not drive its PCI Express outputs (excluding LANWAKEB) and will not sample its PCI Express input as long as the Isolate pin is asserted.

5.2. PCI Express Interface

Table 2. PCI Express Interface

Symbol	Type	Pin No	Description
REFCLK_P	I	26	PCI Express Differential Reference Clock Source: 100MHz $\pm$ 300ppm.
REFCLK_N	I	27	
HSOP	O	29	PCI Express Transmit Differential Pair.
HSOP	O	30	
HSIP	I	23	PCI Express Receive Differential Pair.
HSIN	I	24	
PERSTB	I	20	PCI Express Reset Signal: Active low. When the PERSTB is asserted at power-on state, the RTL8111CP returns to a pre-defined reset state and is ready for initialization and configuration after the de-assertion of the PERSTB.
CLKREQB	O/D	33	Reference Clock Request Signal. This signal is used by the RTL8111CP to request starting of the PCI Express reference clock.

5.3. EEPROM

Table 3. EEPROM

Symbol	Type	Pin No	Description
EESK	O	48	Serial Data Clock.
EEDI/AUX	OI	47	EEDI: Output to serial data input pin of EEPROM. AUX: Input pin to detect if Aux. Power exists or not on initial power-on. This pin should be connected to EEPROM. To support wakeup from ACPI D3 _{cold} or APM power-down, this pin must be pulled high to Aux. Power via a resistor. If this pin is not pulled high to Aux. Power, the RTL8111CP assumes that no Aux. Power exists.
EEDO	I	45	Input from Serial Data Output Pin of EEPROM.
EECS	O	44	EECS: EEPROM chip select.

5.4. Transceiver Interface

Table 4. Transceiver Interface

Symbol	Type	Pin No	Description
MDIP0	IO	3	In MDI mode, this is the first pair in 1000Base-T, i.e. the BI_DA+/- pair, and is the transmit pair in 10Base-T and 100Base-TX.
MDIN0	IO	4	In MDI crossover mode, this pair acts as the BI_DB+/- pair, and is the receive pair in 10Base-T and 100Base-TX.
MDIP1	IO	6	In MDI mode, this is the second pair in 1000Base-T, i.e. the BI_DB+/- pair, and is the receive pair in 10Base-T and 100Base-TX.
MDIN1	IO	7	In MDI crossover mode, this pair acts as the BI_DA+/- pair, and is the transmit pair in 10Base-T and 100Base-TX.
MDIP2	IO	9	In MDI mode, this is the third pair in 1000Base-T, i.e. the BI_DC+/- pair.
MDIN2	IO	10	In MDI crossover mode, this pair acts as the BI_DD+/- pair.
MDIP3	IO	12	In MDI mode, this is the fourth pair in 1000Base-T, i.e. the BI_DD+/- pair.
MDIN3	IO	13	In MDI crossover mode, this pair acts as the BI_DC+/- pair.

5.5. Clock

Table 5. Clock

Symbol	Type	Pin No	Description
CKTAL1	I	60	Input of 25MHz Clock Reference.
CKTAL2	O	61	Output of 25MHz Clock Reference.

5.6. Regulator & Reference

Table 6. Regulator & Reference

Symbol	Type	Pin No	Description
SROUT12	O	1	Switching Regulator 1.2V Output. Connect to 5 μ H inductor.
FB12	I	5	Feedback Pin for Switching Regulator.
ENSR	I	62	3.3V: Enable switching regulator. 0V: Disable switching regulator.
VDDSR	P	63	Digital 3.3V Power Supply for Switching Regulator.
RSET	I	64	Reference. External resistor reference.

Note: See section 7 for switching regulator layout.

5.7. LEDs

Table 7. LEDs

Symbol	Type	Pin No	Description
LED0	O	57	LEDS1-0 00 01 10 11
LED1	O	56	LED0 Tx/Rx Tx/Rx Tx LINK10/ACT
LED2	O	55	LED1 LINK100 LINK10/100/ 1000 LINK LINK100/ ACT
LED3	O	54	LED2 LINK10 LINK10/100 Rx FULL
			LED3 LINK1000 LINK1000 FULL LINK1000/ ACT

Note 1: During power down mode, the LED signals are logic high.

Note 2: LEDSI-0's initial value comes from the 93C46. If there is no 93C46, the default value of the (LEDS1, LEDSI) = (1, 1).

5.8. Power & Ground

Table 8. Power & Ground

Symbol	Type	Pin No	Description
VDD33	P	16, 37, 46, 53	Digital 3.3V Power Supply.
DVDD12	P	21, 32, 38, 43, 49, 52	Digital 1.2V Power Supply.
AVDD12	P	8, 11, 14, 58	Analog 1.2V Power Supply.
EVDD12	P	22, 28	Analog 1.2V Power Supply.
AVDD33	P	2, 59	Analog 3.3V Power Supply.
EGND	G	25, 31	Analog Ground.
GND	G	65	Ground (Exposed Pad).

Note: Refer to the most updated schematic circuit for correct configuration.

5.9. GPIO Pins

Table 9. GPIO Pins

Symbol	Type	Pin No	Description
GPI	I	50	General Purpose Input Pin.
GPO	O	51	General Purpose Output Pin. This pin reflects the link up or link down state. High: Link up Low: Link down

5.10. SMBus

Table 10. SMBus

Symbol	Type	Pin No	Description
SMCLK	IO	17	SMBus Clock.
SMDATA	IO	18	SMBus Data.

5.11. JTag

Table 11. JTag

Symbol	Type	Pin No	Description
TDO	IO	34	Test Data Out.
TDI	IO	35	Test Data In.
TSTCK	I	40	Test Clock.
TMS	I	41	Test Mode Select.
TRSTB	I	42	Test Reset (Low Active).

5.12. NC (Not Connected) Pins

Table 12. NC (Not Connected) Pins

Symbol	Type	Pin No	Description
NC	-	15, 39	Not Connected.

6. Functional Description

6.1. *PCI Express Bus Interface*

The RTL8111CP is compliant with PCI Express Base Specification Revision 1.1, and runs at a 2.5GHz signaling rate with X1 link width, i.e., one transmit and one receive differential pair. The RTL8111CP supports four types of PCI Express messages: interrupt messages, error messages, power management messages, and hot-plug messages. To ease PCB layout constraints, PCI Express lane polarity reversal and link reversal are also supported.

6.1.1. PCI Express Transmitter

The RTL8111CP's PCI Express block receives digital data from the Ethernet interface and performs data scrambling with Linear Feedback Shift Register (LFSR) and 8B/10B coding technology into 10-bit code groups. Data scrambling is used to reduce the possibility of electrical resonance on the link, and 8B/10B coding technology is used to benefit embedded clocking, error detection, and DC balance by adding an overhead to the system through the addition of 2 extra bits. The data code groups are passed through its serializer for packet framing. The generated 2.5Gbps serial data is transmitted onto the PCB trace to its upstream device via a differential driver.

6.1.2. PCI Express Receiver

The RTL8111CP's PCI Express block receives 2.5Gbps serial data from its upstream device to generate parallel data. The receiver's PLL circuits are re-synchronized to maintain bit and symbol lock. Through 8B/10B decoding technology and data de-scrambling, the original digital data is recovered and passed to the RTL8111CP's internal Ethernet MAC to be transmitted onto the Ethernet media.

6.2. *LED Functions*

The RTL8111CP supports four LED signals in four different configurable operation modes. The following sections describe the various LED actions.

6.2.1. Link Monitor

The Link Monitor senses link integrity, such as LINK10, LINK100, LINK1000, LINK10/100/1000, LINK10/ACT, LINK100/ACT, or LINK1000/ACT. Whenever link status is established, the specific link LED pin is driven low. Once a cable is disconnected, the link LED pin is driven high, indicating that no network connection exists.

6.2.2. Rx LED

In 10/100/1000Mbps mode, blinking of the Rx LED indicates that receive activity is occurring.

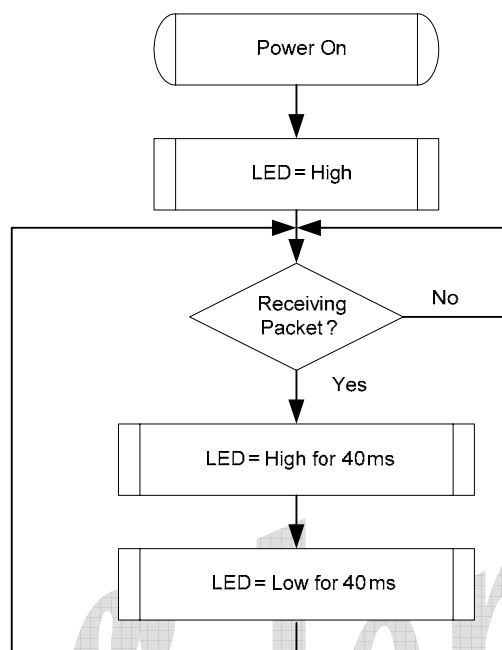


Figure 2. Rx LED

6.2.3. Tx LED

In 10/100/1000Mbps mode, blinking of the Tx LED indicates that transmit activity is occurring.

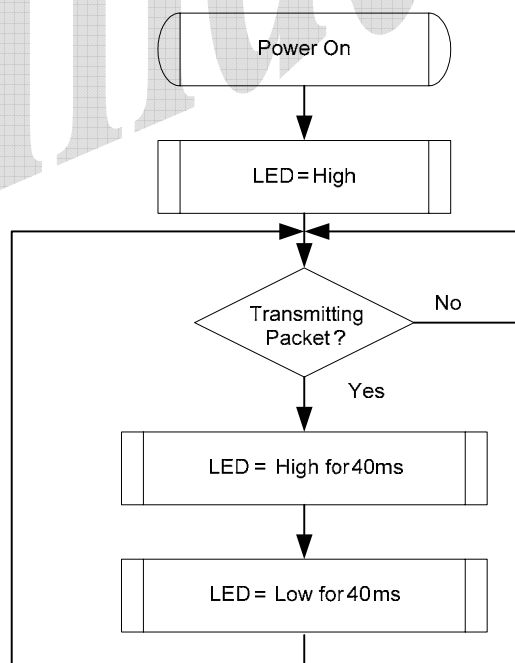


Figure 3. Tx LED

6.2.4. Tx/Rx LED

In 10/100/1000Mbps mode, blinking of the Tx/Rx LED indicates that both transmit and receive activity is occurring.

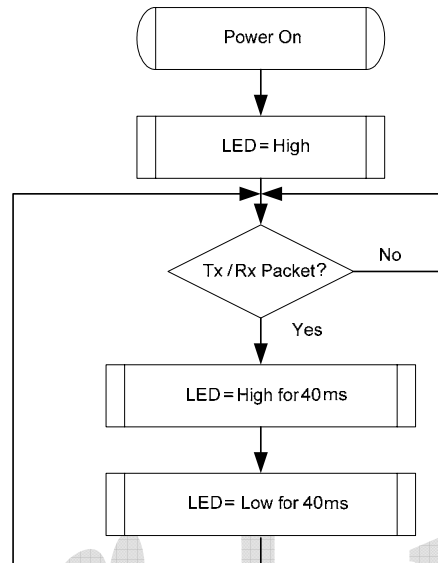


Figure 4. Tx/Rx LED

6.2.5. LINK/ACT LED

In 10/100/1000Mbps mode, blinking of the LINK/ACT LED indicates that the RTL8111CP is linked and operating properly. When this LED is high for extended periods, it indicates that a link problem exists.

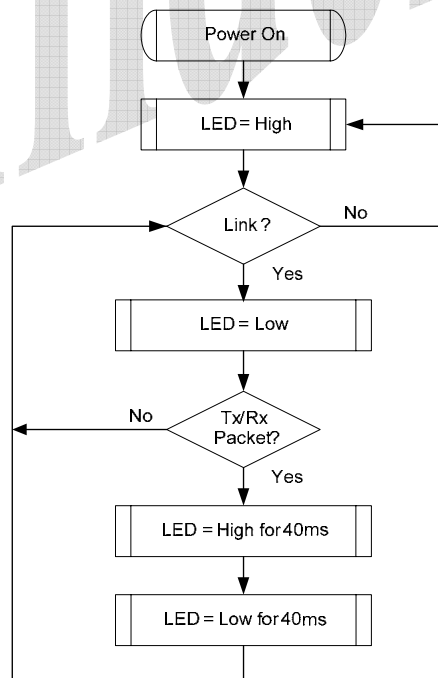


Figure 5. LINK/ACT LED

6.2.6. Customized LED Configuration

The RTL8111CP supports customizable LED operation modes via IO register offset 17h~18h. Table 13 describes the different LED actions.

Table 13. LED Select (IO Register Offset 17h~18h)

Bit	Symbol	RW	Description
15:12	LEDSEL3	R/W	LED select for PINLED3
11:8	LEDSEL2	R/W	LED select for PINLED2
7:4	LEDSEL1	R/W	LED select for PINLED1
3:0	LEDSEL0	R/W	LED select for PINLED0

When implementing customized LEDs:

- Set IO register offset 0x55 bit 6 to 1h to enable the customized LED function
- Configure IO register offset 17h~18h to support your own LED signals. For example, if the value in the IO offset 0x17 is 0x8CA1h (1000110010100001b), the LED actions are:
 - LED 0 is only on in 10M mode, with no blinking of TX/RX
 - LED 1 is only on and with TX/RX blinking in 100M mode
 - LED 2 is only on and with TX/RX blinking in 1000M mode
 - LED 3 is only on in full duplex mode

Table 14. Customized LED

Speed	LINK			ACT/Full
	Link 10M	Link100M	Link1000M	
LED 0	Bit 0	Bit 1	Bit 2	Bit 3
LED 1	Bit 4	Bit 5	Bit 6	Bit 7
LED 2	Bit 8	Bit 9	Bit 10	Bit 11
LED 3	Bit 12	Bit 13	Bit 14	Bit 15

LED Pin	ACT = 0	ACT = 1
LINK=0	Floating	LED on in Full Duplex mode
LINK>0	LED on when selected speed link	LED blinking when selected speed TX/RX

Note1: ACT means blinking of TX and RX, and LINK indicates Link 10M, Link 100M, and Link 1000M.

Note2: There are two special modes

(Mode A) LED OFF Mode → Set all bits to 0.

(Mode B) TX/RX Mode → Set LED 0=0, and either LED 1 or LED 2 or LED 3 >0

LED 0 = Blinking of TX/RX

LED 1 = Follow Customized LED rule

LED 2 = Follow Customized LED rule

LED 3 = Follow Customized LED rule

6.3. PHY Transceiver

6.3.1. PHY Transmitter

Based on state-of-the-art DSP technology and mixed-mode signal processing technology, the RTL8111CP operates at 10/100/1000Mbps over standard CAT.5 UTP cable (100/1000Mbps), and CAT.3 UTP cable (10Mbps).

GMII (1000Mbps) Mode

The RTL8111CP's PCS layer receives data bytes from the MAC through the GMII interface and performs the generation of continuous code-groups through 4D-PAM5 coding technology. These code groups are passed through a waveform-shaping filter to minimize EMI effect, and are transmitted onto the 4-pair CAT5 cable at 125MBaud/s through a D/A converter.

MII (100Mbps) Mode

The transmitted 4-bit nibbles (TXD[3:0]) from the MAC, clocked at 25MHz (TXC), are converted into 5B symbol code through 4B/5B coding technology, then through scrambling and serializing, are converted to 125MHz NRZ and NRZI signals. After that, the NRZI signals are passed to the MLT3 encoder, then to the D/A converter and transmitted onto the media.

MII (10Mbps) Mode

The transmitted 4-bit nibbles (TXD[3:0]) from the MAC, clocked at 2.5MHz (TXC), are serialized into 10Mbps serial data. The 10Mbps serial data is converted into a Manchester-encoded data stream and is transmitted onto the media by the D/A converter.

6.3.2. PHY Receiver

GMII (1000Mbps) Mode

Input signals from the media pass through the sophisticated on-chip hybrid circuit to separate the transmitted signal from the input signal for effective reduction of near-end echo. Afterwards, the received signal is processed with state-of-the-art technology, e.g., adaptive equalization, BLW (Baseline Wander) correction, cross-talk cancellation, echo cancellation, timing recovery, error correction, and 4D-PAM5 decoding. Then, the 8-bit-wide data is recovered and is sent to the GMII interface at a clock speed of 125MHz. The Rx MAC retrieves the packet data from the receive MII/GMII interface and sends it to the Rx Buffer Manager.

MII (100Mbps) Mode

The MLT3 signal is processed with an ADC, equalizer, BLW (Baseline Wander) correction, timing recovery, MLT3 and NRZI decoder, descrambler, 4B/5B decoder, and is then presented to the MII interface in 4-bit-wide nibbles at a clock speed of 25MHz.

MII (10Mbps) Mode

The received differential signal is converted into a Manchester-encoded stream first. Next, the stream is processed with a Manchester decoder and is de-serialized into 4-bit-wide nibbles. The 4-bit nibbles are presented to the MII interface at a clock speed of 2.5MHz.

6.4. *Next Page*

If 1000Base-T mode is advertised, three additional Next Pages are automatically exchanged between the two link partners. Users can set PHY Reg4.15 to 1 to manually exchange extra Next Pages via Reg7 and Reg8 as defined in IEEE 802.3ab.

6.5. *EEPROM Interface*

The RTL8111CP requires the attachment of an external EEPROM. The 93C46/93C56 is a 1K-bit/2K-bit EEPROM. The EEPROM interface permits the RTL8111CP to read from, and write data to, an external serial EEPROM device.

Values in the external EEPROM allow default fields in PCI configuration space and IO space to be overridden following a power-on or software EEPROM auto-load command. The RTL8111CP will auto-load values from the EEPROM. If the EEPROM is not present, the RTL8111CP initialization uses default values for the appropriate Configuration and Operational Registers. Software can read and write to the EEPROM using bit-bang accesses via the 9346CR Register, or using PCI VPD (Vital Product Data). The interface consists of EESK, EECS, EEDO, and EEDI.

The correct EEPROM (i.e., 93C46/93C56) must be used in order to ensure proper LAN function.

Table 15. EEPROM Interface

EEPROM	Description
EECS	93C46/93C56 Chip Select.
EESK	EEPROM Serial Data Clock.
EEDI/Aux	Input data bus/Input pin to detect whether Aux. Power exists on initial power-on. This pin should be connected to EEPROM. To support wakeup from ACPI D3cold or APM power-down, this pin must be pulled high to Aux. Power via a resistor. If this pin is not pulled high to Aux. Power, the RTL8111CP assumes that no Aux. Power exists.
EEDO	Output Data Bus.

6.6. Power Management

The RTL8111CP is compliant with ACPI (Rev 1.0, 1.0b, 2.0), PCI Power Management (Rev 1.1), PCI Express Active State Power Management (ASPM), and Network Device Class Power Management Reference Specification (V1.0a), such as to support an Operating System-directed Power Management (OSPM) environment.

The RTL8111CP can monitor the network for a Wakeup Frame, a Magic Packet, and notify the system via a PCI Express Power Management Event (PME) Message, Beacon, or LANWAKEB pin when such a packet or event occurs. Then the system can be restored to a normal state to process incoming jobs.

When the RTL8111CP is in power down mode (D1 ~ D3):

- The Rx state machine is stopped. The RTL8111CP monitors the network for wakeup events such as a Magic Packet and Wakeup Frame in order to wake up the system. When in power down mode, the RTL8111CP will not reflect the status of any incoming packets in the ISR register and will not receive any packets into the Rx on-chip buffer.
- The on-chip buffer status and packets that have already been received into the Rx on-chip buffer before entering power down mode are held by the RTL8111CP.
- Transmission is stopped. PCI Express transactions are stopped. The Tx on-chip buffer is held.
- After being restored to D0 state, the RTL8111CP transmits data that was not moved into the Tx on-chip buffer during power down mode. Packets that were not transmitted completely last time are re-transmitted.

The D3_{cold}_support_PME bit (bit15, PMC register) and the Aux_I_b2:0 bits (bit8:6, PMC register) in PCI configuration space depend on the existence of Aux power. If aux. power is absent, the above 4 bits are all 0 in binary.

Example:

If EEPROM D3c_support_PME = 1:

- If aux. power exists, then PMC in PCI config space is the same as EEPROM PMC (if EEPROM PMC = C3 F7, then PCI PMC = C3 F7)
- If aux. power is absent, then PMC in PCI config space is the same as EEPROM PMC except the above 4 bits are all 0's (if EEPROM PMC = C3 F7, then PCI PMC = 03 76)

In the above case, if wakeup support is desired when main power is off, it is suggested that the EEPROM PMC be set to C3 F7 (Realtek EEPROM default value).

If EEPROM D3c_support_PME = 0:

- If aux. power exists, then PMC in PCI config space is the same as EEPROM PMC (if EEPROM PMC = C3 77, then PCI PMC = C3 77)
- If aux. power is absent, then PMC in PCI config space is the same as EEPROM PMC except the above 4 bits are all 0's (if EEPROM PMC = C3 77, then PCI PMC = 03 76)

In the above case, if wakeup support is not desired when main power is off, it is suggested that the EEPROM PMC be set to 03 76.

Magic Packet Wakeup occurs only when the following conditions are met:

- The destination address of the received Magic Packet is acceptable to the RTL8111CP, e.g., a broadcast, multicast, or unicast packet addressed to the current RTL8111CP adapter.
- The received Magic Packet does not contain a CRC error.
- The Magic bit (CONFIG3#5) is set to 1, the PMEn bit (CONFIG1#0) is set to 1, and the corresponding wake-up method (message, beacon, or LANWAKEB) can be asserted in the current power state.
- The Magic Packet pattern matches, i.e., 6 * FFh + MISC (can be none) + 16 * DID (Destination ID) in any part of a valid Ethernet packet.

A Wakeup Frame event occurs only when the following conditions are met:

- The destination address of the received Wakeup Frame is acceptable to the RTL8111CP, e.g., a broadcast, multicast, or unicast address to the current RTL8111CP adapter.
- The received Wakeup Frame does not contain a CRC error.
- The PMEn bit (CONFIG1#0) is set to 1.
- The 16-bit CRCA of the received Wakeup Frame matches the 16-bit CRC of the sample Wakeup Frame pattern given by the local machine's OS. Or, the RTL8111CP is configured to allow direct packet wakeup, e.g., a broadcast, multicast, or unicast network packet.

Note: 16-bit CRC: The RTL8111CP supports eight long wakeup frames (covering 128 mask bytes from offset 0 to 127 of any incoming network packet).

The corresponding wake-up method (message, beacon, or LANWAKEB) is asserted only when the following conditions are met:

- The PMEn bit (bit0, CONFIG1) is set to 1.
- The PME_En bit (bit8, PMCSR) in PCI Configuration Space is set to 1.
- The RTL8111CP may assert the corresponding wake-up method (message, beacon, or LANWAKEB) in the current power state or in isolation state, depending on the PME_Support (bit15-11) setting of the PMC register in PCI Configuration Space.
- A Magic Packet, LinkUp, or Wakeup Frame has been received.
- Writing a 1 to the PME_Status (bit15) of the PMCSR register in the PCI Configuration Space clears this bit and causes the RTL8111CP to stop asserting the corresponding wake-up method (message, beacon, or LANWAKEB) (if enabled).

When the RTL8111CP is in power down mode, e.g., D1-D3, the IO and MEM accesses to the RTL8111CP are disabled. After a PERSTB assertion, the device's power state is restored to D0 automatically if the original power state was D3_{cold}. There is almost no hardware delay at the device's power state transition. When in ACPI mode, the device does not support PME (Power Management Enable) from D0 (this is the Realtek default setting of the PMC register auto-loaded from EEPROM). The setting may be changed from the EEPROM, if required.

6.7. Vital Product Data (VPD)

Bit 31 of the Vital Product Data (VPD) capability structure in the RTL8111CP's PCI Configuration Space is used to issue VPD read/write commands and is also a flag used to indicate whether the transfer of data between the VPD data register and the 93C46/93C56/93C66 has completed or not.

Write VPD register: (write data to the 93C46/93C56/93C66)

Set the flag bit to 1 at the same time the VPD address is written to write VPD data to EEPROM. When the flag bit is reset to 0 by the RTL8111CP, the VPD data (4 bytes per VPD access) has been transferred from the VPD data register to EEPROM.

Read VPD register: (read data from the 93C46/93C56/93C66)

Reset the flag bit to 0 at the same time the VPD address is written to retrieve VPD data from EEPROM. When the flag bit is set to 1 by the RTL8111CP, the VPD data (4 bytes per VPD access) has been transferred from EEPROM to the VPD data register.

Note1: Refer to the PCI 2.3 Specifications for further information.

Note2: The VPD address must be a DWORD-aligned address as defined in the PCI 2.3 Specifications. VPD data is always consecutive 4-byte data starting from the VPD address specified.

Note3: Realtek reserves offset 60h to 7Fh in EEPROM mainly for VPD data to be stored.

Note4: The VPD function of the RTL8111CP is designed to be able to access the full range of the 93C46/93C56/93C66 EEPROM.

6.8. Receive-Side Scaling (RSS)

The RTL8111CP is compliant with the new Network Driver Interface Specification (NDIS) 6.0 Receive-Side Scaling (RSS) technology for the Microsoft Windows family of operating systems. RSS allows packet receive-processing from a network adapter to be balanced across the number of available computer processors, increasing performance on multi CPU platforms.

6.8.1. Receive-Side Scaling (RSS) Initialization

During RSS initialization, the Windows operating system will inform the RTL8111CP to store the following parameters: hash function, hash type, hash bits, indirection table, BaseCPUNumber, and the secret hash key.

Hash Function

The default hash function is the Toeplitz hash function.

Hash Type

The hash types indicate which field of the packet needs to be hashed to get the hash result. There are several combinations of these fields, mainly, TCP/IPv4, IPv4, TCP/IPv6, IPv6, and IPv6 extension headers.

- TCP/IPv4 requires hash calculations over the IPv4 source address, the IPv4 destination address, the source TCP port and the destination TCP port.
- IPv4 requires hash calculations over the IPv4 source address and the IPv4 destination address.
- TCP/IPv6 requires hash calculations over the IPv6 source address, the IPv6 destination address, the source TCP port and the destination TCP port.
- IPv6 requires hash calculations over the IPv6 source address and the IPv6 destination address
(Note: The RTL8111CP does not support the IPv6 extension header hash type in RSS).

Hash Bits

Hash bits are used to index the hash result into the indirection table

Indirection Table

The Indirection Table stores values that are added to the BaseCPUNumber to enable RSS interrupts to be restricted from some CPUs. The OS will update the Indirection Table to rebalance the load.

BaseCPUNumber

The lowest number CPU to use for RSS. BaseCPUNumber is added to the result of the indirection table lookup.

Secret Hash Key

The key used in the Toeplitz function. For different hash types, the key size is different.

6.8.2. RSS Operation

After the parameters are set, the RTL8111CP will start hash calculations on each incoming packet and forward each packet to its correct queue according to the hash result. If the incoming packet is not in the hash type, it will be forwarded to the primary queue. The hash result plus the BaseCPUNumber will be indexed into the indirection table to get the correct CPU number. The RTL8111CP uses three ways to inform the system of incoming packets: inline interrupt, MSI, and MSIX. Periodically the OS will update the indirection table to rebalance the load across the CPUs.

6.9. Alert Specification Format (ASF)

ASF (Alert Standard Format) is a standard developed by the Pre-OS Working Group under DMTF (Distributed Management Task Force). ASF helps network management through capabilities such as system health monitoring, asset protection, and remote control.

IT departments have many choices regarding network management, but not all network management can operate in low-power and OS-absent states. ASF allows IT managers to manage and access the managed clients in an OS-absent environment.

From a technological point of view, an ASF managed client can provide advance warnings and system failure indications to the remote management console. The Ethernet controller sits on the motherboard or a plug-in network adapter card (NIC) in the local system. It collects information from various components in the system, including the CPU, chipset, BIOS, and sensors on the motherboard. It sends collected information to the management console running on a remote server.

6.9.1. Security-Extensions

RMCP Security-Extensions Protocol (RSP) provides integrity and anti-replay services for RMCP messages. When RSP is used, an entire RMCP message is encapsulated in an RSP header and trailer.

- An RSP header is inserted between the UDP header and the RMCP header and its presence is identified by the use of the RMCP security extensions UDP port number (0298h). The RSP header contains two fields: Session ID and Sequence Number. A Session ID is an arbitrary number used to identify the particular session state (algorithms, keys, etc). A Sequence Number is a unique monotonically increasing number which is used for the 32-bit sliding window anti-replay mechanism.
- An RSP trailer is located following the end of the RMCP message's Data block (i.e., security extensions are applied above the UDP layer). An RSP trailer contains 4 fields: Pad, Pad Length, Next Header, and Integrity Data. An integrity algorithm (e.g., HMAC-SHA1-96 defined in [RFC2404]) is performed over the specific fields of the RSP Header, RMCP Message, and RSP trailer, the result is placed in the Integrity Data field in the RSP trailer.

6.9.2. ASF (Alert Standard Format) 2.0 Support

Watchdog Timer

RTL8111CP supports two sets of start/stop watchdog timer. One is a software watchdog timer. The other is a firmware watchdog timer counter. The system BIOS supports an SMBus interface running SMBus Messages. The system initiating a 'power on' state enables the firmware watchdog timer of the RTL8111CP.

ARP Ethernet

The RTL8111CP supports auto-response ARP Ethernet packets in an OS-absent environment.

System Heartbeat and Alert PET

The RTL8111CP supports system heartbeat and Platform Event Trap (PET) Alert packets. System heartbeat is a periodic message sent by the managed client indicating its presence to the management console. A PET alert is an alert message regarding environment, system firmware, and OS events sent by the managed client to the management console.

RMCP and Remote Control

The RTL8111CP supports RMCP messages and remote control packets.

- RMCP Messages

- Presence of ping/pong packets (80h/40h)

- Used to identify the presence of an ASF-RMCP-aware managed client on the network.

- System state request/response packet (81h/41h)

- Used to identify the state of the managed client.

- Capability request/response (82h/42h)

- Used to identify the client system's ASF capability.

- Open session request/response (83h/43h)

- Used to establish a protected session between the management console and the managed client.

- Close session request/response (84h/44h)

- Used to close a protected session.

- Support for four sets of remote control actions

- Reset (10h), Power on (11h), Power off (12h), Power cycle reset (13h) (Refer to the ASF 2.0 specifications for more details)

ASF SMBus Messages

The RTL8111CP supports an SMBus interface that is capable of operating in master or slave mode. (Refer to the SMBus 2.0 and ASF 2.0 specifications for more details about ASF SMBus Messages).

The RTL8111CP's ASF SMBus Messages are listed below:

- **SMBus ARP Messages**
The RTL8111CP gets an SMBus Address from system firmware.
- **ASF-Sensor Poll Messages (Get Event Status and Get Event Data)**
The RTL8111CP monitors the system state through Get Event Status and Get Event Data messages, which poll ASF-sensors for individual events and present event status. The RTL8111CP sends Platform Event Trap (PET) alerts to the management console when it observes abnormal events.
- **Legacy Sensor Device Poll Message**
The RTL8111CP monitors 8 sets of legacy sensors in the motherboard.
- **Start Watchdog Timer**
The system firmware starts the RTL8111CP's watchdog timer with a start watchdog timer message. If the watchdog timer times out, the RTL8111CP will send a PET alert.
- **Stop Watchdog Timer**
The system firmware stops the RTL8111CP's watchdog timer with a stop watchdog timer message.
- **Push Alert Messages (Message with/without retransmission)**
This message is used when the system firmware and sensors notify the RTL8111CP to send a PET alert.
- **Set System State Message**
This message is used by the managed client's firmware to record the client's current System State into the RTL8111CP.
- **Device Type Poll Message**
Allows a SMBus master to further determine the characteristics of a SMBus 2.0 device that responds to an ARP cycle with the ASF bit of its interface byte set to 1.
- **Remote-Control Device Action Message**
The RTL8111CP forces a remote control action to the managed client via a Remote-Control Device Action message.
- **Boot Option Messages**
This message uses the SMBus Block Read Protocol. The managed client's firmware uses this message to retrieve the options sent over the network to the RTL8111CP via the RMCP commands: Reset (10h), Power-up (11h), and Power Cycle Reset (13h).

7. Switching Regulator

The RTL8111CP incorporates a state-of-the-art switching regulator that requires a well-designed PCB layout in order to achieve good power efficiency and lower the output voltage ripple and input overshoot.

7.1. PCB Layout

- The input 3.3V power trace connected to pin 63 (VDDSR) should be wider than 40mils.
- The bulk de-coupling capacitors (C82 and C83) should be placed within 200mils (0.5cm) of pin 63 to prevent input voltage overshoot.
- The output power trace out of pin 1 (SROUT12) should be wider than 60mils.
- Keep L20 within 200mils (0.5cm) of pin1.
- Keep C18 and C19 within 200mils (0.5cm) of L20 to ensure stable output power and better power efficiency.
- Both C18 and C82 are strongly recommended to be ceramic capacitors.

Note: Violation of the above rules will damage the IC.

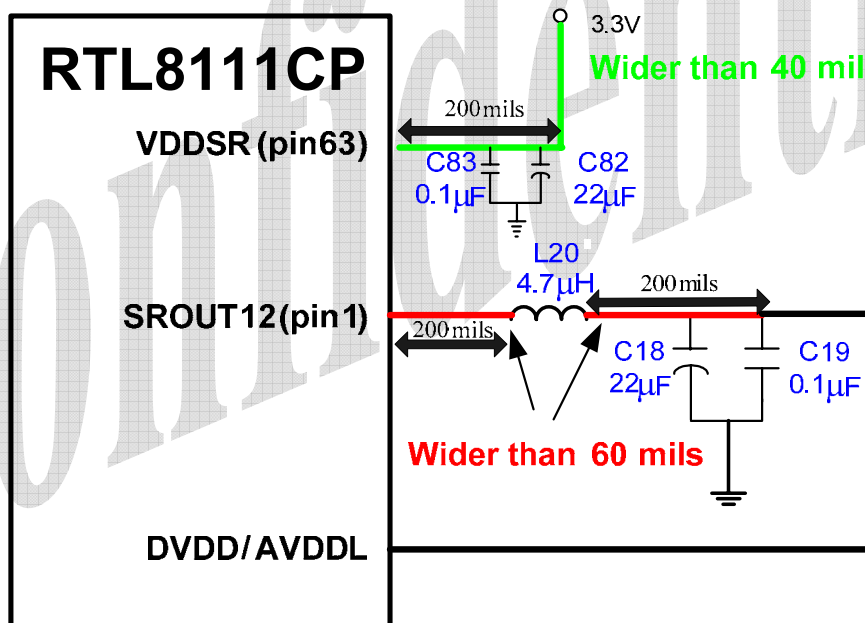


Figure 6. Switching Regulator Illustration

7.2. Inductor and Capacitor Parts List

Table 16. Inductor and Capacitor Parts List

Inductor Type	Inductance	ESR at 1MHz (mΩ)	Max IDC (mA)	Output Ripple (mV)
4R7GTSD32	4.7μH	712	1100	12.6
6R8GTSD32	6.8μH	784	900	12
6R8GTSD53	6.8μH	737	1510	10.4

Note: The ESR is equivalent to RDC or DCR. Lower ESR inductor values will promote a higher efficiency switching regulator.

Note2: The power inductor used by the switching regulator should be able to withstand 600mA of current.

Note3: Typically, if the power inductor's ESR at 1MHz is below 0.8 Ω, the switching regulator efficiency will be above 75%. However the actual switching regulator efficiency must be measured according to the method described in section 7.5 Efficiency Measurement, page 28.

Capacitor Type	Capacitance	ESR at 1MHz (mΩ)	Output Ripple (mV)
22μF 1210 TDK	21.5μF	33.53	9.6
22μF 1210 X5R	22.15μF	34.11	10.4

Note: Capacitors (C18 & C82) are suggested to be ceramic due to their low ESR value. Lower ESR values will yield lower output voltage ripple.

7.3. Measurement Criteria

In order for the switching regulator to operate properly, the input and output voltage measurement criteria must be met. From the input side, the voltage overshoot cannot exceed 4V; otherwise the chip may be damaged. Note that the voltage signal must be measured directly at Pin 63, not at the capacitor. In order to reduce the input voltage overshoot, the C82 and C83 must be placed close to Pin 63. The following figures show what a good input voltage and a bad one look like.

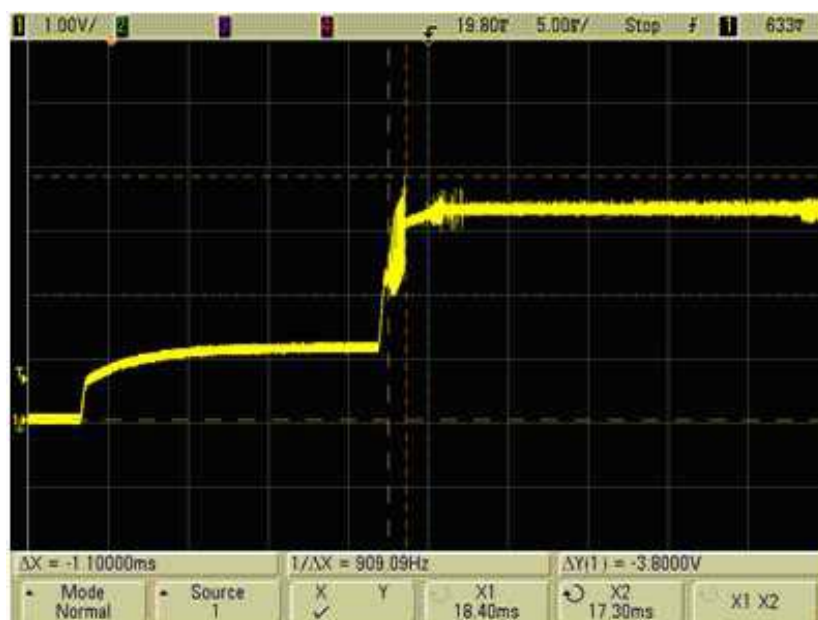


Figure 7. Input Voltage Overshoot <4V (Good)

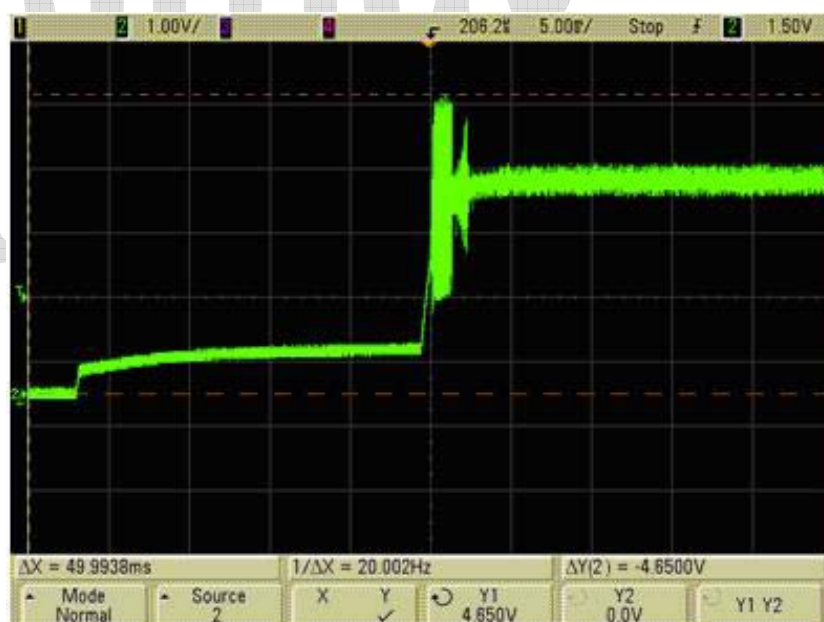


Figure 8. Input Voltage Overshoot >4V (Bad)

From the output side measured at Pin 1, the voltage ripple must be within 100mV. Choosing different types and values of output capacitor (C18, C19) and power inductor (L20) will seriously affect the efficiency and output voltage ripple of switching regulators. The following figures show the effects of different types of capacitors on the switching regulator's output voltage.

The blue square wave signal (top row) is measured at the output of SROUT12 (Pin1) before the power inductor (L20). The yellow signal (second row) is measured after the power inductor (L20), and shows there is a voltage ripple. The green signal (lower row) is the current. Data in the following figures was measured at gigabit speed.



Figure 9. Ceramic 22μF 1210 (X5R) (Good)

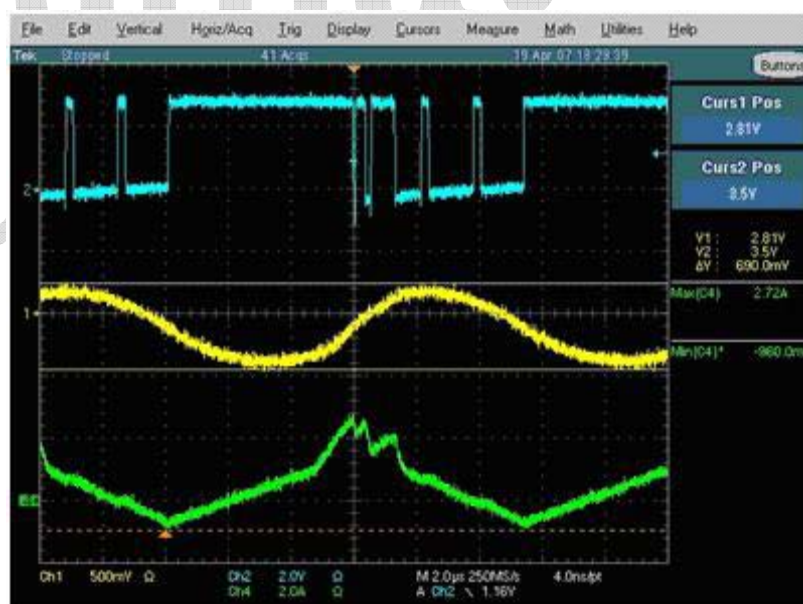


Figure 10. Ceramic 22μF 0805 (Y5V) (Bad)

A ceramic 22 μ F (X5R) will have a lower voltage ripple compared to the electrolytic 100 μ F. The key to choosing a proper output capacitor is to choose the lowest ESR to reduce the output voltage ripple. Choosing a ceramic 22 μ F 0805 (Y5V) in this case will cause malfunction of the switching regulator. Placing several Electrolytic capacitors in parallel will help lower the output voltage ripple.



Figure 11. Electrolytic 100 μ F (Ripple Too High)

The following figures show how different inductors affect the PIN 1 output waveform. The typical waveform should look like Figure 12, which has a square waveform with a dip at the falling edge and the rising edge. If the inductor is not carefully chosen, the waveform may look like Figure 13, where the waveform looks like a distorted square. This will cause insufficient current supply and will undermine the stability of the system at gigabit speed. Data in the following figures was measured at gigabit speed.

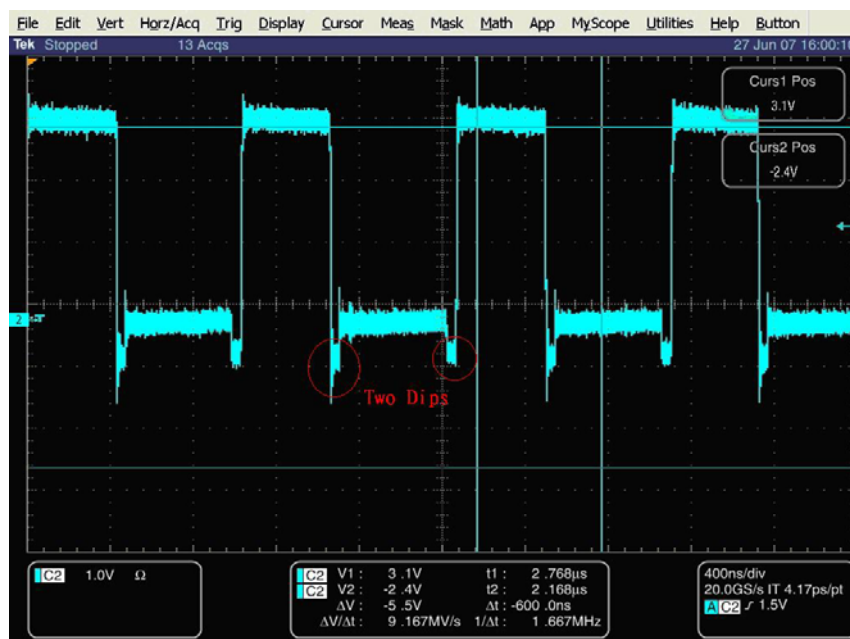


Figure 12. 4R7GTSD32 (Good)

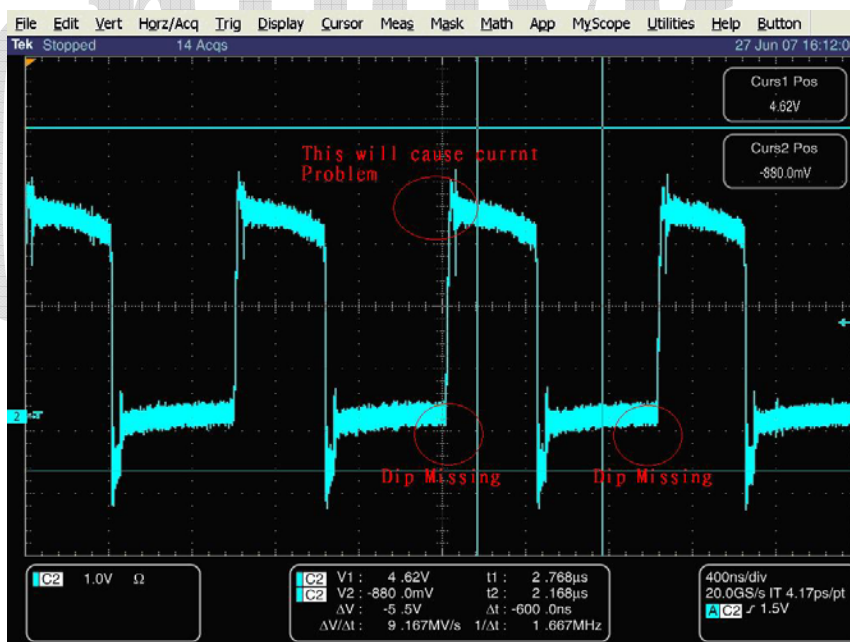


Figure 13. 1μH Bead (Bad)

7.4. Typical Switching Regulator PCB Layout

The typical layout of Figure 14 and Figure 15 are similar. The trace from RSET should pass through a via to the lower layer, and the trace should be protected by a ground trace. The width of the ground trace should be more than 5 mils.

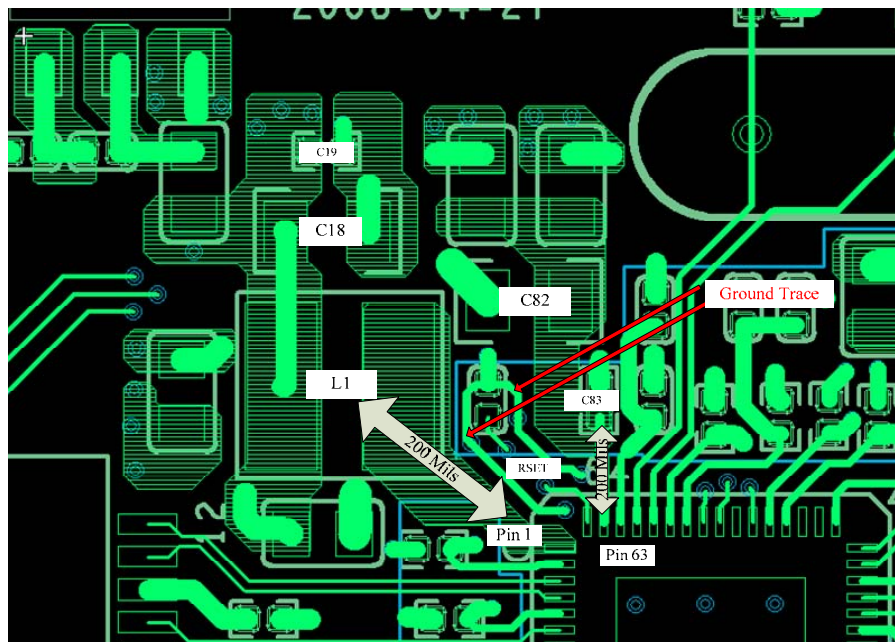


Figure 14. Typical Switching Regulator PCB Layout (Top Layer)

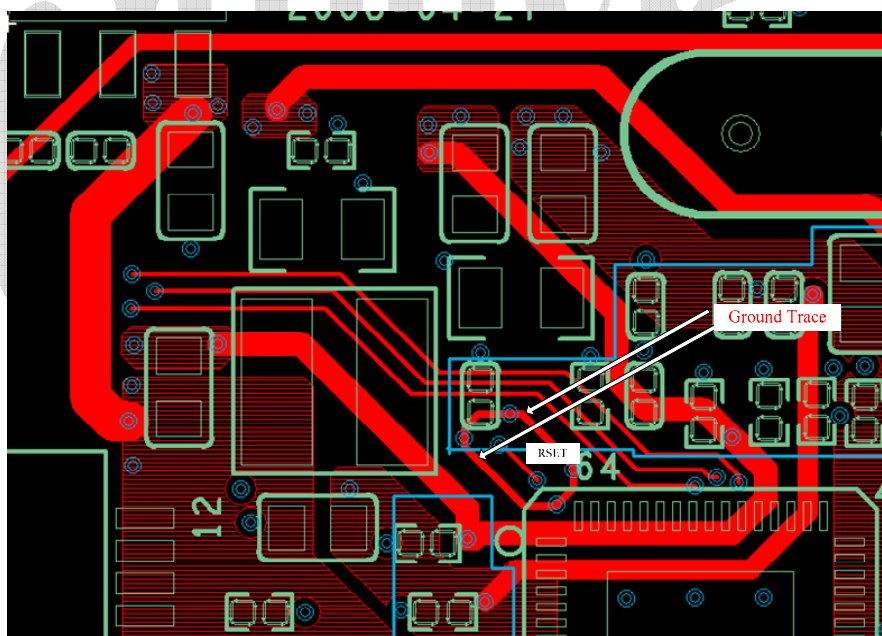


Figure 15. Typical Switching Regulator PCB Layout (Bottom Layer)

7.5. Efficiency Measurement

The efficiency of the switching regulator is designed to be above 75% in gigabit traffic mode. It is very important to choose a suitable inductor before Gerber certification, as the Inductor ESR value will affect the efficiency of the switching regulator. An inductor with a lower ESR value will result in a higher efficiency switching regulator.

The efficiency of the switching regulator is easily measured using the following method.

Figure 16 shows two checkpoints, checkpoint A (CP_A) and checkpoint B (CP_B). The switching regulator input current (Icpa) should be measured at CP_A, and the switching regulator output current (Icpb) should be measured at CP_B.

To determine efficiency, apply the following formula:

$$\text{Efficiency} = V_{cpb} \cdot I_{cpb} / V_{cpa} \cdot I_{cpa}$$

Where V_{cpb} is 1.2V; V_{cpa} is 3.3V. The measurements should be performed in gigabit traffic mode.

For example: The inductor used in the evaluation board is a GOTREND GTSD32-4R7M:

- The ESR value @ 1MHz is approximately 0.712ohm
- The measured I_{cpa} is 160mA at CP_A
- The measured I_{cpb} is 352mA at CP_B

These values are measured in gigabit traffic mode, so the efficiency of the GOTREND GTSD32-4R7M can be calculated as follows:

$$\text{Efficiency} = (1.2V \cdot 352mA) / (3.3V \cdot 160mA) = 0.8 = 80\%$$

We strongly recommend that when choosing an inductor for the switching regulator, the efficiency should be measured, and that the inductor should yield an efficiency rating higher than 75%. If the efficiency does not meet this requirement, there may be risk to the switching regulator reliability in the long run.

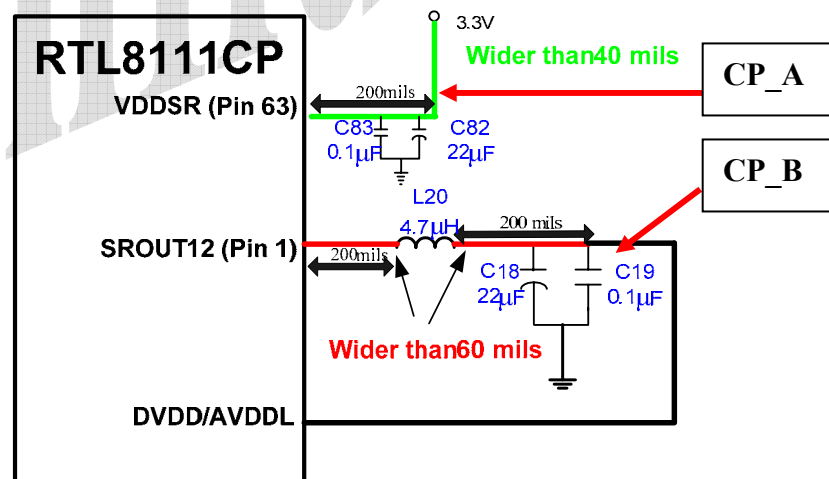


Figure 16. Switching Regulator Efficiency Measurement Checkpoint

7.6. Power Sequence

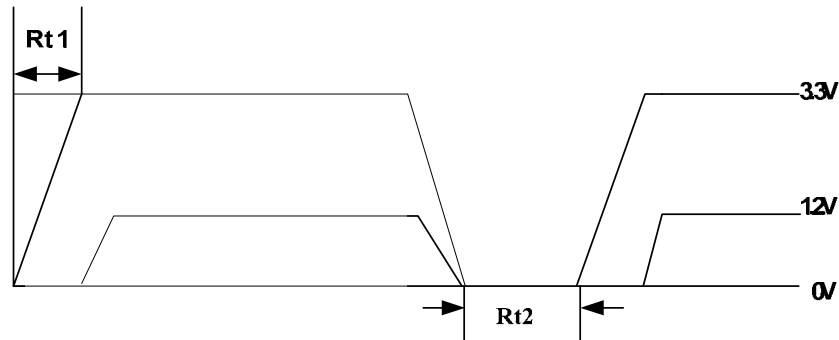


Figure 17. Power Sequence

Table 17. Power Sequence Parameter

Symbol	Description	Min	Typical	Max	Units
Rt1	3.3V Rise Time	1	-	100	ms
Rt2	3.3V Fall Time	200	-	-	ms

Note1: The RTL8111CP does not support fast 3.3V rising. The 3.3V rise time must be controlled over 1ms. If the rise time is too short it will induce a peak voltage in PIN63, which may cause permanent damage to the switching regulator.

Note 2: If there is any action that involves consecutive ON/OFF toggling of the switching-regulator source (3.3V), the design must make sure the OFF state of both the switching-regulator source (3.3V) and output (1.2V) reach 0V, and the time period between the consecutive ON/OFF toggling action must be longer than 200ms.

8. Characteristics

8.1. Absolute Maximum Ratings

WARNING: Absolute maximum ratings are limits beyond which permanent damage may be caused to the device, or device reliability will be affected. All voltages are specified reference to GND unless otherwise specified.

Table 18. Absolute Maximum Ratings

Symbol	Description	Minimum	Maximum	Unit
VDD33, AVDD33	Supply Voltage 3.3V	-0.3	+0.3	V
AVDD12, DVDD12	Supply Voltage 1.2V	-0.3	+0.12	V
EVDD12	Supply Voltage 1.2V	-0.3	+0.12	-
DCinput	Input Voltage	-0.3	Corresponding Supply Voltage + 0.5	V
DCoutput	Output Voltage	-0.3	Corresponding Supply Voltage + 0.5	V
N/A	Storage Temperature	-55	+125	°C

Note: Refer to the most updated schematic circuit for correct configuration.

8.2. Recommended Operating Conditions

Table 19. Recommended Operating Conditions

Description	Symbol	Minimum	Typical	Maximum	Unit
Supply Voltage VDD	VDD33, AVDD33	2.97	3.3	3.63	V
	AVDD12, DVDD12	1.1	1.2	1.32	V
	EVDD12	1.14	1.2	1.26	V
Ambient Operating Temperature T _A	-	0	-	70	°C
Maximum Junction Temperature	-	-	-	125	°C

Note: Refer to the most updated schematic circuit for correct configuration.

8.3. Crystal Requirements

Table 20. Crystal Requirements

Symbol	Description/Condition	Minimum	Typical	Maximum	Unit
F _{ref}	Parallel resonant crystal reference frequency, fundamental mode, AT-cut type.	-	25	-	MHz
F _{ref} Stability	Parallel resonant crystal frequency stability, fundamental mode, AT-cut type. T _a = 0°C ~ +70°C.	-30	-	+30	ppm
F _{ref} Tolerance	Parallel resonant crystal frequency tolerance, fundamental mode, AT-cut type. T _a = 25°C.	-50	-	+50	ppm
F _{ref} Duty Cycle	Reference Clock Input Duty Cycle.	40	-	60	%
ESR	Equivalent Series Resistance.	-	-	30	Ω
DL	Drive Level.	-	-	0.5	mW

8.4. Oscillator Requirements

Table 21. Oscillator Requirements

Parameter	Condition	Minimum	Typical	Maximum	Unit
Frequency	-	-	25	-	MHz
Frequency Stability	$T_a = 0^{\circ}\text{C} \sim +70^{\circ}\text{C}$	-30	-	+30	ppm
Frequency Tolerance	$T_a = 25^{\circ}\text{C}$	-50	-	+50	ppm
Duty Cycle	-	40	-	60	%
Jitter	-	-	-	50	ps
Vp-p	-	3.15	3.3	3.45	V
Rise Time	-	-	-	10	ns
Fall Time	-	-	-	10	ns
Operation Temp Range	-	0	-	70	$^{\circ}\text{C}$

8.5. Thermal Characteristics

Table 22. Thermal Characteristics

Parameter	Minimum	Maximum	Units
Storage Temperature	-55	+125	$^{\circ}\text{C}$
Ambient Operating Temperature	0	70	$^{\circ}\text{C}$

8.6. DC Characteristics

Table 23. DC Characteristics

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Units
VDD33, AVDD33	3.3V Supply Voltage	-	2.97	3.3	3.63	V
EVDD12, AVDD12	1.2V Supply Voltage	-	1.1	1.2	1.32	V
DVDD12	1.2V Supply Voltage	-	1.1	1.2	1.32	V
V_{oh}	Minimum High Level Output Voltage	$I_{oh} = -4\text{mA}$	$0.9 \cdot V_{DD33}$	-	V_{DD33}	V
V_{ol}	Maximum Low Level Output Voltage	$I_{ol} = 4\text{mA}$	0	-	$0.1 \cdot V_{DD33}$	V
V_{ih}	Minimum High Level Input Voltage	-	1.8	-	-	V
V_{il}	Maximum Low Level Input Voltage	-	-	-	0.8	V
I_{in}	Input Current	$V_{in} = V_{DD33}$ or GND	0	-	0.5	μA
Icc33	Average Operating Supply Current from 3.3V	At 1Gbps with heavy network traffic	-	65	-	mA
Icc12	Average Operating Supply Current from 1.2V	At 1Gbps with heavy network traffic	-	387	-	mA

Note: Refer to the most updated schematic circuit for correct configuration.

8.7. AC Characteristics

8.7.1. Serial EEPROM Interface Timing

93C46(64*16)/93C56(128*16)

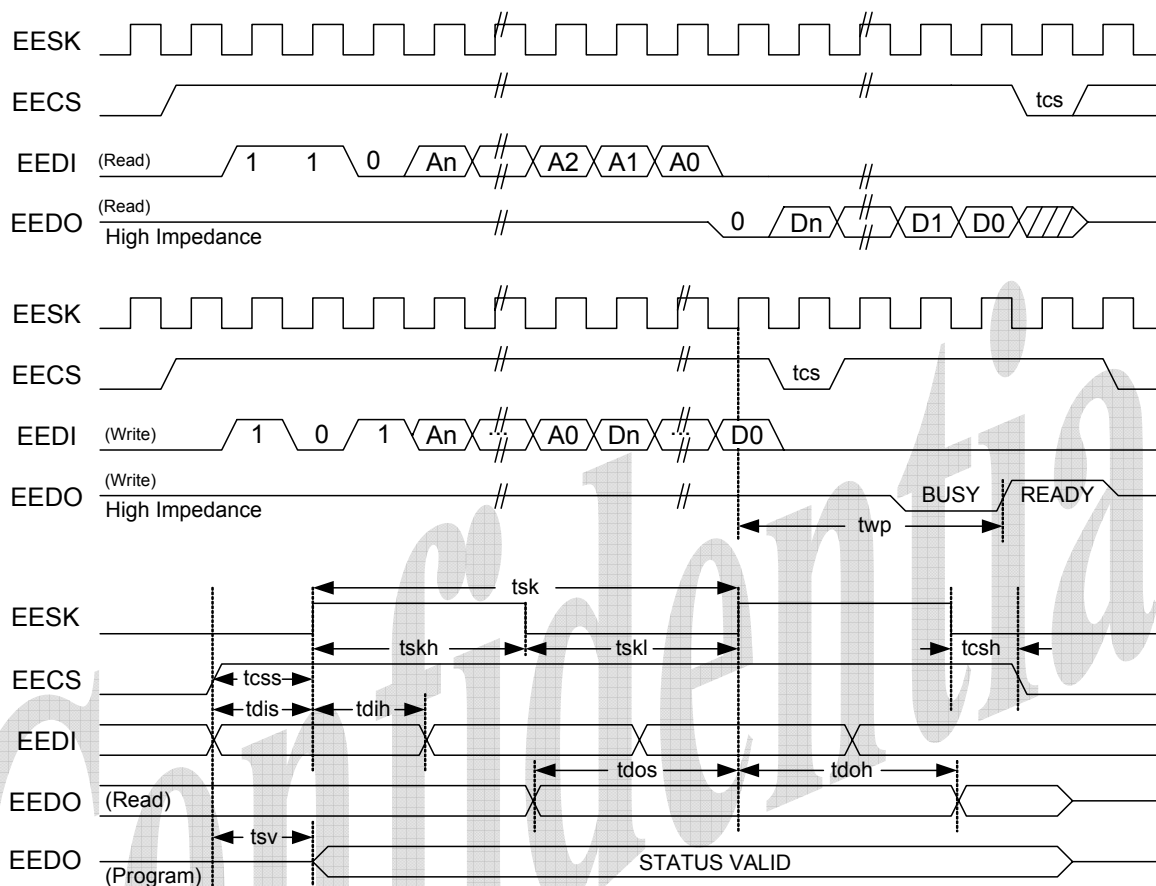


Figure 18. Serial EEPROM Interface Timing

Table 24. EEPROM Access Timing Parameters

Symbol	Parameter	EEPROM Type	Min.	Max.	Unit
tcs	Minimum CS Low Time	9346	1000	-	ns
twp	Write Cycle Time	9346	-	10	ms
tsk	SK Clock Cycle Time	9346	4	-	μs
tskh	SK High Time	9346	1000	-	ns
tskl	SK Low Time	9346	1000	-	ns
tcss	CS Setup Time	9346	200	-	ns
tcsh	CS Hold Time	9346	0	-	ns
tdis	DI Setup Time	9346	400	-	ns
tdih	DI Hold Time	9346	400	-	ns
tdos	DO Setup Time	9346	2000	-	ns
tdoh	DO Hold Time	9346	-	2000	ns
tsv	CS to Status Valid	9346	-	1000	ns

8.8. PCI Express Bus Parameters

8.8.1. Differential Transmitter Parameters

Table 25. Differential Transmitter Parameters

Symbol	Parameter	Min	Typical	Max	Units
UI	Unit Interval ²	399.88	400	400.12	ps
V _{TX-DIFFp-p}	Differential Peak to Peak Output Voltage	0.800	-	1.2	V
V _{TX-DE-RATIO}	De-Emphasized Differential Output Voltage (Ratio)	-3.0	-3.5	-4.0	dB
T _{TX-EYE}	Minimum Tx Eye Width	0.75	-	-	UI
T _{TX-EYE-MEDIAN-to-MAX-JITTER}	Maximum time between the jitter median and maximum deviation from the median	-	-	0.125	UI
T _{TX-RISE, T_{TX-FALL}}	D+/D- Tx Output Rise/Fall Time	0.125	-	-	UI
V _{TX-CM-ACp}	RMS AC Peak Common Mode Output Voltage	-	-	20	mV
V _{TX-CM-DCACTIVE-IDLEDELTA}	Absolute Delta of DC Common Mode Voltage During L0 and Electrical Idle	0	-	100	mV
V _{TX-CM-DCLINE-DELTA}	Absolute Delta of DC Common Mode Voltage between D+ and D-	0	-	25	mV
V _{TX-IDLE-DIFFp}	Electrical Idle Differential Peak Output Voltage	0	-	20	mV
V _{TX-RCV-DETECT}	The amount of voltage change allowed during Receiver Detection	-	-	600	mV
V _{TX-DC-CM}	The TX DC Common Mode Voltage	0	-	3.6	V
I _{TX-SHORT}	TX Short Circuit Current Limit	-	-	90	mA
T _{TX-IDLE-MIN}	Minimum Time Spent in Electrical Idle	50	-	-	UI
T _{TX-IDLE-SETTO-IDLE}	Maximum time to transition to a valid Electrical Idle after sending an Electrical Idle ordered set	-	-	20	UI
T _{TX-IDLE-TOTO-DIFF-DATA}	Maximum time to transition to valid TX specifications after leaving an Electrical Idle condition	-	-	20	UI
RL _{TX-DIFF}	Differential Return Loss	10	-	-	dB
RL _{TX-CM}	Common Mode Return Loss	6	-	-	dB
Z _{TX-DIFF-DC}	DC Differential TX Impedance	80	100	120	Ω
L _{TX-SKEW}	Lane-to-Lane Output Skew	-	-	500+2UI	ps
C _{TX}	AC Coupling Capacitor	75	-	200	nF
T _{crosslink}	Crosslink Random Timeout	0	-	1	ms

Note1: Refer to PCI Express Base Specification, rev.1.1, for correct measurement environment setting of each parameter.

Note2: The data rate can be modulated with an SSC (Spread Spectrum Clock) from +0 to -0.5% of the nominal data rate frequency, at a modulation rate in the range not exceeding 30kHz – 33kHz. The +/- 300ppm requirement still holds, which requires the two communicating ports be modulated such that they never exceed a total of 600 ppm difference.

8.8.2. Differential Receiver Parameters

Table 26. Differential Receiver Parameters

Symbol	Parameter	Min.	Typical	Max.	Units
UI	Unit Interval	399.88	400	400.12	ps
$V_{RX-DIFFp-p}$	Differential Input Peak to Peak Voltage	0.175	-	1.200	V
T_{RX-EYE}	Minimum Receiver Eye Width	0.4	-	-	UI
$T_{RX-EYE-MEDIAN-to-MAX-JITTER}$	Maximum time between the jitter median and maximum deviation from the median	-	-	0.3	UI
$V_{RX-CM-ACp}$	AC Peak Common Mode Input Voltage	-	-	150	mV
$RL_{RX-DIFF}$	Differential Return Loss	10	-	-	dB
RL_{RX-CM}	Common Mode Return Loss	6	-	-	dB
$Z_{RX-DIFF-DC}$	DC Differential Input Impedance	80	100	120	Ω
Z_{RX-DC}	DC Input Impedance	40	50	60	Ω
$Z_{RX-HIGH-IMP-DC}$	Powered Down DC Input Impedance	200 k	-	-	Ω
$V_{RX-IDLE-DET-DIFFp-p}$	Electrical Idle Detect Threshold	65	-	175	mV
$T_{RX-IDLE-DET-DIFFENTERTIME}$	Unexpected Electrical Idle Enter Detect Threshold Integration Time	-	-	10	ms
$L_{RX-SKEW}$	Total Skew	-	-	20	ns

Note: Refer to PCI Express Base Specification, rev.1.1, for correct measurement environment setting of each parameter.

8.8.3. REFCLK Parameters

Table 27. REFCLK Parameters

Symbol	Parameter	100MHz Input		Units	Note
		Min	Max		
Rise Edge Rate	Rising Edge Rate	0.6	4.0	V/ns	2, 3
Fall Edge Rate	Falling Edge Rate	0.6	4.0	V/ns	2, 3
V_{IH}	Differential Input High Voltage	+150	-	mV	2
V_{IL}	Differential Input Low Voltage	-	-150	mV	2
V_{CROSS}	Absolute Crossing Point Voltage	+250	+550	mV	1, 4, 5
$V_{CROSS\ DELTA}$	Variation of V_{CROSS} Over All Rising Clock Edges	-	+140	mV	1, 4, 9
V_{RB}	Ring-Back Voltage Margin	-100	+100	mV	2, 12
T_{STABLE}	Time Before V_{RB} is Allowed	500		ps	2, 12
$T_{PERIOD\ AVG}$	Average Clock Period Accuracy	-300	+2800	ppm	2, 10, 13
$T_{PERIOD\ ABS}$	Absolute Period (Including Jitter and Spread Spectrum)	9.847	10.203	ns	2, 6
$T_{CCJITTER}$	Cycle to Cycle Jitter	-	150	ps	2
V_{MAX}	Absolute Max Input Voltage	-	+1.15	V	1, 7
V_{MIN}	Absolute Min Input Voltage	-	-0.3	V	1, 8
Duty Cycle	Duty Cycle	40	60	%	2

Symbol	Parameter	100MHz Input		Units	Note
		Min	Max		
Rise-Fall Matching	Rising Edge Rate (REFCLK+) to Falling Edge Rate (REFCLK-) Matching	-	20	%	1, 14
Z _{C-DC}	Clock Source DC Impedance	40	60	Ω	1, 11

Note1: Measurement taken from single ended waveform.

Note2: Measurement taken from differential waveform.

Note3: Measured from -150mV to +150mV on the differential waveform (derived from REFCLK+ minus REFCLK-). The signal must be monotonic through the measurement region for rise and fall time. The 300mV measurement window is centered on the differential zero crossing. See Figure 22, page 37.

Note4: Measured at crossing point where the instantaneous voltage value of the rising edge of REFCLK+ equals the falling edge of REFCLK-. See Figure 19, page 36.

Note5: Refers to the total variation from the lowest crossing point to the highest, regardless of which edge is crossing. Refers to all crossing points for this measurement. See Figure 19, page 36.

Note6: Defines as the absolute minimum or maximum instantaneous period. This includes cycle to cycle jitter, relative PPM tolerance, and spread spectrum modulation. See Figure 21, page 36.

Note7: Defined as the maximum instantaneous voltage including overshoot. See Figure 19, page 36.

Note8: Defined as the minimum instantaneous voltage including undershoot. See Figure 19, page 36.

Note9: Defined as the total variation of all crossing voltages of Rising REFCLK+ and Falling REFCLK-. This is the maximum allowed variance in VCROSS for any particular system. See Figure 19, page 36.

Note10: Refer to Section 4.3.2.1 of the PCI Express Base Specification, Revision 1.1 for information regarding PPM considerations.

Note11: System board compliance measurements must use the test load card described in Figure16. REFCLK+ and REFCLK- are to be measured at the load capacitors CL. Single ended probes must be used for measurements requiring single ended measurements. Either single ended probes with math or differential probe can be used for differential measurements. Test load CL=2pF.

Note12: T_{STABLE} is the time the differential clock must maintain a minimum $\pm 150mV$ differential voltage after rising/falling edges before it is allowed to droop back into the $V_{RB} \pm 100mV$ differential range. See Figure 24, page 37.

Note13: PPM refers to parts per million and is a DC absolute period accuracy specification. 1ppm is $1/1,000,000^{th}$ of 100.000000MHz exactly or 100Hz. For 300ppm then we have an error budget of $100Hz/ppm * 300ppm = 30kHz$. The period is to be measured with a frequency counter with measurement window set to 100ms or greater. The $\pm 300ppm$ applies to systems that do not employ Spread Spectrum or that use common clock source. For systems employing Spread Spectrum there is an additional 2500ppm nominal shift in maximum period resulting from the 0.5% down spread resulting in a maximum average period specification of +2800ppm.

Note14: Matching applies to rising edge rate for REFCLK+ and falling edge rate for REFCLK-. It is measured using a $\pm 75mV$ window centered on the median cross point where REFCLK+ rising meets REFCLK- falling. The median cross point is used to calculate the voltage thresholds the oscilloscope is to use for the edge rate calculations. The Rise Edge Rate of REFCLK+ should be compared to the Fall Edge Rate of REFCLK-; the maximum allowed difference should not exceed 20% of the slowest edge rate. See Figure 20, page 36.

Note15: Refer to PCI Express Card Electromechanical Specification, rev.1.1, for correct measurement environment setting of each parameter.

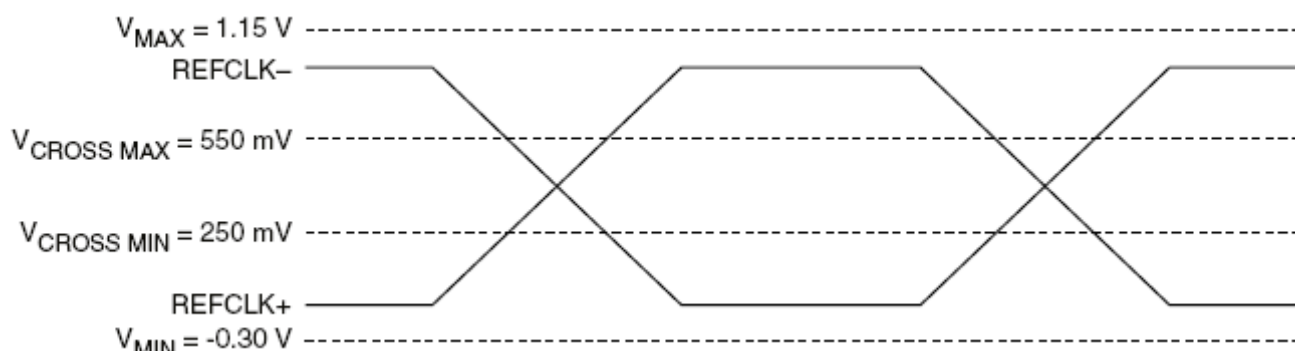


Figure 19. Single-Ended Measurement Points for Absolute Cross Point and Swing

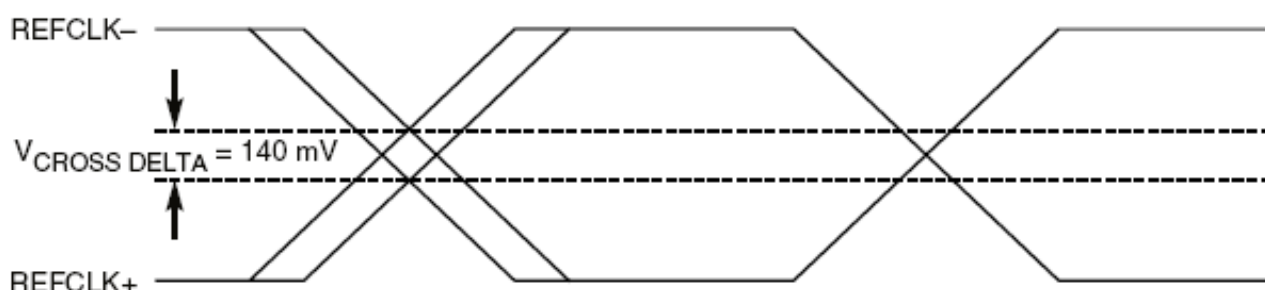


Figure 20. Single-Ended Measurement Points for Delta Cross Point

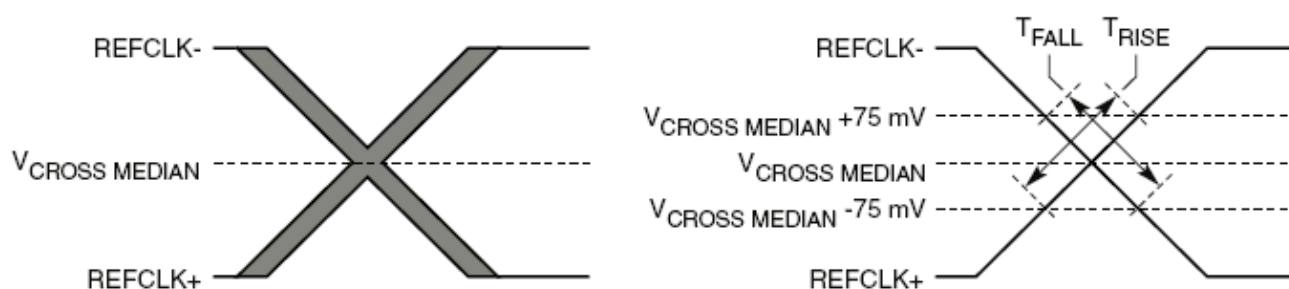


Figure 21. Single-Ended Measurement Points for Rise and Fall Time Matching

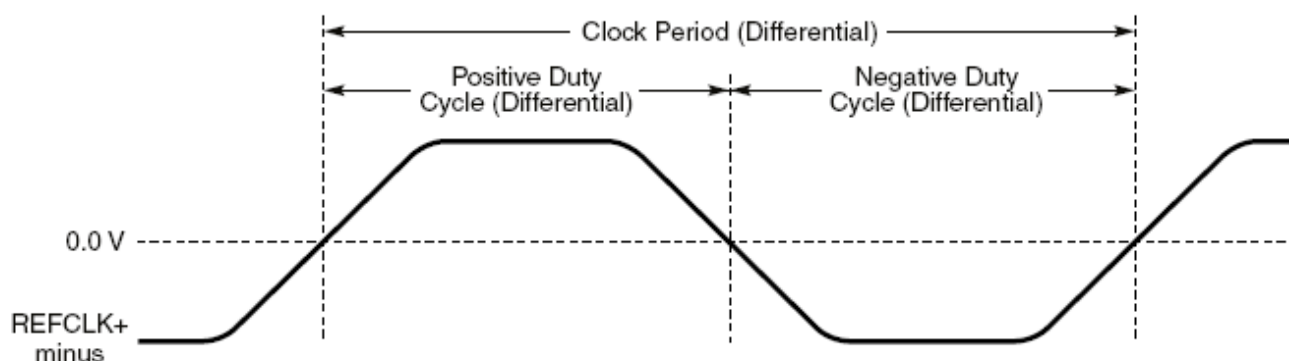


Figure 22. Differential Measurement Points for Duty Cycle and Period

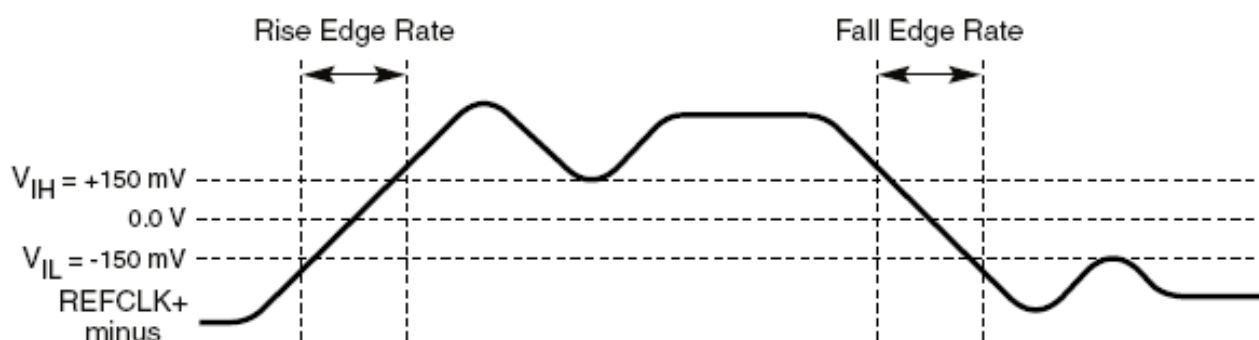


Figure 23. Differential Measurement Points for Rise and Fall Time

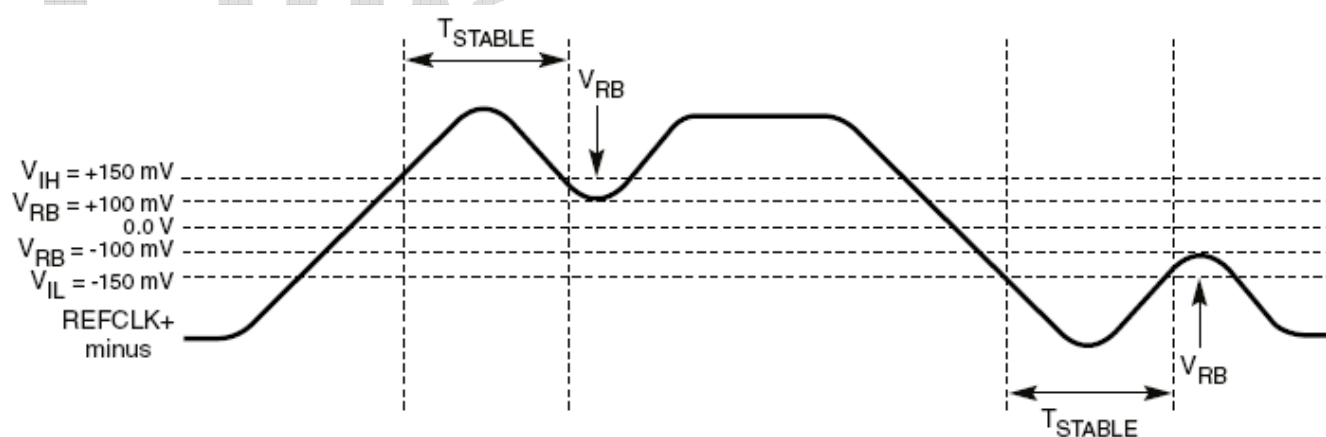


Figure 24. Differential Measurement Points for Ringback

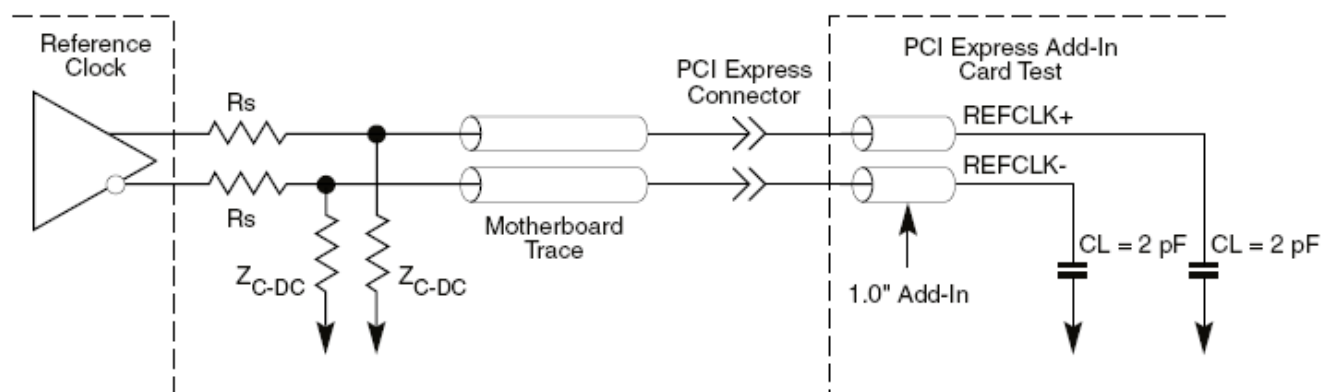


Figure 25. Reference Clock System Measurement Point and Loading

8.8.4. Auxiliary Signal Timing Parameters

Table 28. Auxiliary Signal Timing Parameters

Symbol	Parameter	Min	Max	Units
T_{PVPERL}	Power Stable to PERSTB Inactive	100	-	ms
$T_{PERST-CLK}$	REFCLK Stable before PERSTB Inactive	100	-	μ s
T_{PERST}	PERSTB Active Time	100	-	μ s
T_{FAIL}	Power Level Invalid to PWRGD Inactive	-	500	ns
T_{WKRF}	LANWAKEB Rise – Fall Time	-	100	ns






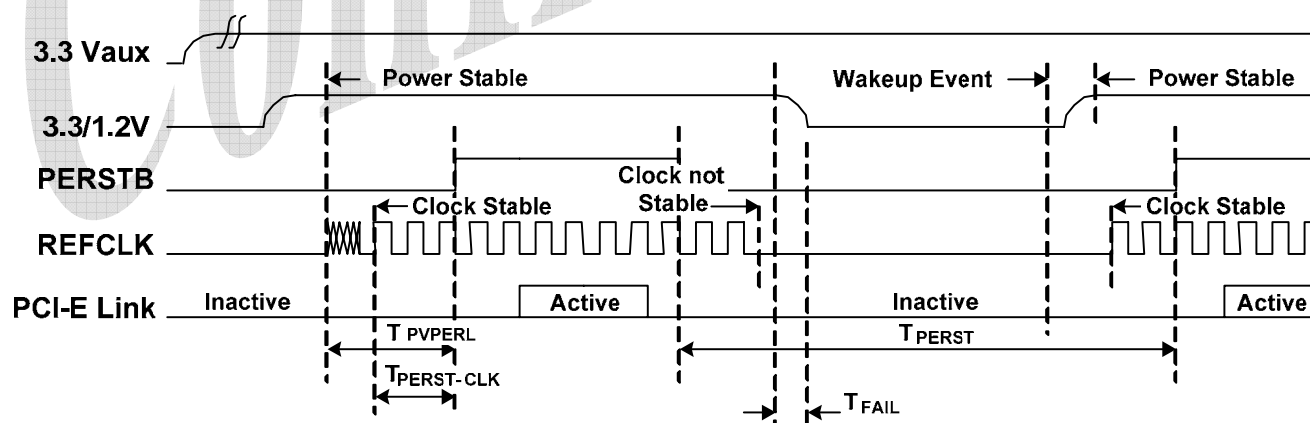


Figure 26. Auxiliary Signal Timing

9. Mechanical Dimensions

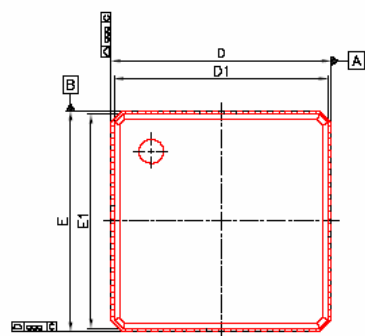

DETAIL : B



Optional exposed support bar (see list "※")

DETAIL : A

Symbol	Dimension in mm			Dimension in inch		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.85	1.00	0.031	0.033	0.039
A1	0.00	0.02	0.05	0.000	0.008	0.002
A2	---	0.65	1.00	---	0.026	0.039
A3	0.20 REF			0.008 REF		
b	0.18	0.23	0.30	0.007	0.009	0.012
D	9.00 BSC			0.354 BSC		
D1	8.75 BSC			0.344 BSC		
E	9.00 BSC			0.354 BSC		
E1	8.75 BSC			0.344 BSC		
s	0.50 BSC			0.020 BSC		
L	0.30	0.40	0.50	0.012	0.016	0.020
θ	12°			12°		
aaa	---			0.25		
bbb	---			0.10		
charfer	---			0.60		

NOTE:

1. CONTROLLING DIMENSION : MILLIMETER
2. REFERENCE DOCUMENT: PROPOSED JEDEC MO-220.

Exposed Pad Size & Support bar table							
L/F	D2 (mm)			E2 (mm)			※
①	6.90	7.05	7.20	6.90	7.05	7.20	YES / NO
②	6.70	6.85	7.00	6.70	6.85	7.00	NO
③	5.54	5.69	5.84	5.54	5.69	5.84	NO
④	3.84	3.78	3.94	3.84	3.78	3.94	NO

Note: RTL8111CP's exposed pad size is L/F 3

OVER MOLD

TITLE : 64LD QFN (9X9 mm) PACKAGE OUTLINE			
L/F MATERIAL : A194 FH(PPF)			
APPR.	Holman Chen	DWG NO.	CE064-SW1
ENG.	C.Y.Horng	REV NO.	c
QM.	S.T.Liao	PRODUCT CODE	CE0641A
CHK.	Y.Y.Lai	DATE	06/18/'02
DWG.	R.K.Wang	SHT No.	1/1
SILICONWARE PRECISION INDUSTRIES CO., LTD.			

COPY
CONTROLLED

REV NO	DESCRIPTION	DATE
C	Add Exposed Pad Size & Support bar table	06/17/02

10. Ordering Information

Table 29. Ordering Information

Part Number	Package	Status
RTL8111CP-VB-GR	64-Pin QFN 'Green' Package	Production

Note: See page 3 for package ID information.

Confidential

Realtek Semiconductor Corp.

Headquarters

No. 2, Innovation Road II
Hsinchu Science Park, Hsinchu 300, Taiwan
Tel.: +886-3-578-0211. Fax: +886-3-577-6047
www.realtek.com.tw