

REALTEK

DRAFT

RTL8111DP-VC-CG

INTEGRATED 10/100/1000M ETHERNET CONTROLLER FOR PCI EXPRESS APPLICATIONS

DRAFT

DATASHEET

(CONFIDENTIAL: Development Partners Only)

DRAFT

Rev. 1.2

22 November 2012

Track ID: JATR-8275-15



REALTEK

Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

www.realtek.com

COPYRIGHT

©2011 Realtek Semiconductor Corp. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realtek Semiconductor Corp.

DISCLAIMER

Realtek provides this document 'as is', without warranty of any kind. Realtek may make improvements and/or changes in this document or in the product described in this document at any time. This document could include technical inaccuracies or typographical errors.

TRADEMARKS

Realtek is a trademark of Realtek Semiconductor Corporation. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

LICENSE

This product is covered by one or more of the following patents: US5,307,459, US5,434,872, US5,732,094, US6,570,884, US6,115,776, and US6,327,625.

USING THIS DOCUMENT

This document is intended for the software engineer's reference and provides detailed programming information.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide.

REVISION HISTORY

Revision	Release Date	Summary
1.0	2011/04/20	First release.
1.1	2011/09/13	Revised Table 6 Regulator and Reference, page 7. Revised section 6.9 Realtek RealManage (DASH 1.1 Compliant), page 22.
1.2	2012/11/22	Add description for SMBus Alert signal in Table 12, page 8.

Table of Contents

1. GENERAL DESCRIPTION	1
2. FEATURES	3
3. SYSTEM APPLICATIONS	3
4. PIN ASSIGNMENTS	4
4.1. PACKAGE IDENTIFICATION	4
5. PIN DESCRIPTIONS	5
5.1. POWER MANAGEMENT/ISOLATION	5
5.2. PCI EXPRESS INTERFACE	5
5.3. SPI (SERIAL PERIPHERAL INTERFACE) FLASH PINS	6
5.4. TRANSCEIVER INTERFACE	6
5.5. CLOCK	6
5.6. REGULATOR AND REFERENCE	7
5.7. LEDs	7
5.8. POWER AND GROUND	7
5.9. GPIO PINS	8
5.10. USB INTERFACE	8
5.11. UART INTERFACE	8
5.12. SMBUS	8
5.13. JTAG	9
6. FUNCTIONAL DESCRIPTION	10
6.1. PCI EXPRESS BUS INTERFACE	10
6.1.1. PCI Express Transmitter	10
6.1.2. PCI Express Receiver	10
6.2. LED FUNCTIONS	10
6.2.1. Link Monitor	10
6.2.2. RX LED	11
6.2.3. TX LED	11
6.2.4. TX/RX LED	12
6.2.5. LINK/ACT LED	12
6.2.6. Customized LED Configuration	13
6.3. PHY TRANSCEIVER	14
6.3.1. PHY Transmitter	14
6.3.2. PHY Receiver	14
6.4. NEXT PAGE	15
6.5. SPI (SERIAL PERIPHERAL INTERFACE) FLASH	15
6.6. POWER MANAGEMENT	15
6.7. RECEIVE-SIDE SCALING (RSS)	18
6.7.1. Receive-Side Scaling (RSS) Initialization	18
6.7.2. RSS Operation	19
6.8. ALERT SPECIFICATION FORMAT (ASF)	19
6.8.1. Security-Extensions	19
6.8.2. ASF (Alert Standard Format) 2.0 Support	20
6.9. REALTEK REALMANAGE (DASH 1.1 COMPLIANT)	22
6.9.1. DASH Profile Support	22
6.9.2. Protocol Implementation Requirements	23
6.9.3. Security Implementation Requirement	23
6.9.4. Discovery Requirements	24

6.10.	IP SECURITY OFFLOAD	25
6.10.1.	IP Security Offload Crypto Engine.....	25
6.10.2.	IP Security Offload Features	25
7.	CHARACTERISTICS.....	26
7.1.	ABSOLUTE MAXIMUM RATINGS	26
7.2.	RECOMMENDED OPERATING CONDITIONS	26
7.3.	CRYSTAL REQUIREMENTS.....	27
7.4.	OSCILLATOR REQUIREMENTS	27
7.5.	THERMAL CHARACTERISTICS.....	27
7.6.	DC CHARACTERISTICS	28
7.7.	AC CHARACTERISTICS.....	29
7.7.1.	SPI Flash Interface Timing.....	29
7.7.2.	SPI Flash Commands	31
7.7.3.	SPI Flash Type Supported	31
7.8.	PCI EXPRESS BUS PARAMETERS	32
7.8.1.	Differential Transmitter Parameters	32
7.8.2.	Differential Receiver Parameters.....	33
7.8.3.	REFCLK Parameters.....	33
7.8.4.	Auxiliary Signal Timing Parameters	37
8.	MECHANICAL DIMENSIONS.....	38
8.1.	MECHANICAL DIMENSIONS NOTES	39
9.	ORDERING INFORMATION.....	40

DRAFT

List of Tables

TABLE 1.	POWER MANAGEMENT/ISOLATION	5
TABLE 2.	PCI EXPRESS INTERFACE.....	5
TABLE 3.	SPI FLASH PINS	6
TABLE 4.	TRANSCEIVER INTERFACE	6
TABLE 5.	CLOCK	6
TABLE 6.	REGULATOR AND REFERENCE	7
TABLE 7.	LEDs	7
TABLE 8.	POWER AND GROUND	7
TABLE 9.	GPIO PINS	8
TABLE 10.	USB INTERFACE	8
TABLE 11.	UART INTERFACE	8
TABLE 12.	SMBUS	8
TABLE 13.	JTAG	9
TABLE 14.	LED SELECT (IO REGISTER OFFSET 17H~18H).....	13
TABLE 15.	CUSTOMIZED LED	13
TABLE 16.	SPI FLASH INTERFACE	15
TABLE 17.	PROFILES DEFINED IN DASH 1.0	22
TABLE 18.	PROFILES DEFINED IN DASH 1.1	22
TABLE 19.	OTHER DMTF PROFILES	23
TABLE 20.	ABSOLUTE MAXIMUM RATINGS	26
TABLE 21.	RECOMMENDED OPERATING CONDITIONS	26
TABLE 22.	CRYSTAL REQUIREMENTS	27
TABLE 23.	OSCILLATOR REQUIREMENTS	27
TABLE 24.	THERMAL CHARACTERISTICS.....	27
TABLE 25.	DC CHARACTERISTICS	28
TABLE 26.	SPI FLASH COMMANDS	31
TABLE 27.	SPI FLASH TYPE SUPPORTED	31
TABLE 28.	DIFFERENTIAL TRANSMITTER PARAMETERS	32
TABLE 29.	DIFFERENTIAL RECEIVER PARAMETERS.....	33
TABLE 30.	REFCLK PARAMETERS	33
TABLE 31.	AUXILIARY SIGNAL TIMING PARAMETERS.....	37
TABLE 32.	ORDERING INFORMATION	40

List of Figures

FIGURE 1.	PIN ASSIGNMENTS	4
FIGURE 2.	RX LED	11
FIGURE 3.	TX LED	11
FIGURE 4.	TX/RX LED	12
FIGURE 5.	LINK/ACT LED	12
FIGURE 6.	WREN TIMING	29
FIGURE 7.	READ TIMING	29
FIGURE 8.	PROGRAM TIMING	30
FIGURE 9.	SECTOR/CHIP ERASE TIMING	30
FIGURE 10.	SINGLE-ENDED MEASUREMENT POINTS FOR ABSOLUTE CROSS POINT AND SWING	35
FIGURE 11.	SINGLE-ENDED MEASUREMENT POINTS FOR DELTA CROSS POINT	35
FIGURE 12.	SINGLE-ENDED MEASUREMENT POINTS FOR RISE AND FALL TIME MATCHING	35
FIGURE 13.	DIFFERENTIAL MEASUREMENT POINTS FOR DUTY CYCLE AND PERIOD	36
FIGURE 14.	DIFFERENTIAL MEASUREMENT POINTS FOR RISE AND FALL TIME	36
FIGURE 15.	DIFFERENTIAL MEASUREMENT POINTS FOR RINGBACK	36
FIGURE 16.	REFERENCE CLOCK SYSTEM MEASUREMENT POINT AND LOADING	37
FIGURE 17.	AUXILIARY SIGNAL TIMING	37

1. General Description

The Realtek RTL8111DP-VC-CG 10/100/1000M Ethernet controller combines a triple-speed IEEE 802.3 compliant Media Access Controller (MAC) with a triple-speed Ethernet transceiver, PCI Express bus controller, and embedded memory. With state-of-the-art DSP technology and mixed-mode signal technology, the RTL8111DP offers high-speed transmission over CAT 5 UTP cable or CAT 3 UTP (10Mbps only) cable. Functions such as Crossover Detection and Auto-Correction, polarity correction, adaptive equalization, cross-talk cancellation, echo cancellation, timing recovery, and error correction are implemented to provide robust transmission and reception capability at high speeds.

The RTL8111DP complies with the IEEE 802.3u specification for 10/100Mbps Ethernet and the IEEE 802.3ab specification for 1000Mbps Ethernet. It also supports an auxiliary power auto-detect function, and will auto-configure related bits of the PCI power management registers in PCI configuration space.

Advanced Configuration Power management Interface (ACPI)—power management for modern operating systems that are capable of Operating System-directed Power Management (OSPM)—is supported to achieve the most efficient power management possible. PCI MSI (Message Signaled Interrupt) and MSI-X are also supported.

In addition to the ACPI feature, remote wake-up (including AMD Magic Packet and Microsoft Wake-up frame) is supported in both ACPI and APM (Advanced Power Management) environments. To support WOL from a deep power down state (e.g., D3cold, i.e., main power is off and only auxiliary exists), the auxiliary power source must be able to provide the needed power for the RTL8111DP.

The RTL8111DP is fully compliant with Microsoft NDIS5, NDIS6 (IPv4, IPv6, TCP, UDP) Checksum and Segmentation Task-offload (Large send and Giant send) features, and supports IEEE 802 IP Layer 2 priority encoding and IEEE 802.1Q Virtual bridged Local Area Network (VLAN). The above features contribute to lowering CPU utilization, especially benefiting performance when in operation on a network server.

The RTL8111DP supports four Receive Side Scaling (RSS) queues to hash incoming TCP connections and load-balance received data processing across multiple CPUs. RSS improves the number of transactions/connections per second, for increased network throughput.

Alert Specification Format (ASF 2.0) is supported to provide system manageability in OS-absent environments. The ASF defines remote control and alerting interfaces that serve managed PCs in OS-absent states. With the ASF capability, we are able to minimize on-site IT maintenance, to improve system availability, and also to control power management remotely.

DRAFT

The Desktop and mobile Architecture for System Hardware (DASH) initiative is a suite of specifications that takes full advantage of the DMTF's Web Services for Management (WS-Management) specification – delivering standards-based Web services management for desktop and mobile client systems. Through the DASH initiative, the RTL8111DP provides the next generation of standards for secure out-of-band and remote management of desktop and mobile systems.

The RTL8111DP supports Internet Protocol security (IPSEC). The IPsec protocol suite is based on powerful encryption technologies, and adds security services to the IP layer that are compatible with both IPv4 and IPv6. With IPsec, users can create a secure VPN on demand.

The RTL8111DP also features inter-connect PCI Express technology. PCI Express is a high-bandwidth, low-pin-count, serial, interconnect technology that offers significant improvements in performance over conventional PCI and also maintains software compatibility with existing PCI infrastructure. The device embeds an adaptive equalizer in the PCI-E PHY for ease of system integration and excellent link quality. The equalizer enables the length of the PCB traces to reach 40 inches.

The RTL8111DP is suitable for multiple market segments and emerging applications, such as desktop, mobile, workstation, server, communications platforms, and embedded applications.

DRAFT**DRAFT**

2. Features

- Integrated 10/100/1000 transceiver
- Auto-Negotiation with Next Page capability
- Supports PCI Express 1.1
- Supports pair swap/polarity/skew correction
- Crossover Detection & Auto-Correction
- Wake-On-LAN and remote wake-up support
- Microsoft NDIS5, NDIS6 Checksum Offload (IPv4, IPv6, TCP, UDP) and Segmentation Task-offload (Large send and Giant send) support
- Supports Full Duplex flow control (IEEE 802.3x)
- Fully compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Supports IP Security Offload
- Supports IEEE 802.1P Layer 2 Priority Encoding
- Supports IEEE 802.1Q VLAN tagging
- Single/Dual MAC/IP support
- Embedded OTP memory
- SPI Flash Interface
- Transmit/Receive on-chip buffer support
- Supports power down/link down power saving
- Built-in switching regulator
- Supports PCI MSI (Message Signaled Interrupt) and MSI-X
- Supports Alert Specification Format 2.0 (ASF 2.0)
- Supports Realtek RealManage Remote Management Technology (DASH 1.1 Compliant)
- Supports Receive-Side Scaling (RSS)
- Supports Four Customizable LEDs
- Embeds an adaptive equalizer in PCI Express PHY (PCB traces can reach up to 40 inches)
- 64-pin QFN package (Green package)

DRAFT

3. System Applications

- PCI Express Gigabit Ethernet on Motherboard, Notebook, or Embedded system

4. Pin Assignments

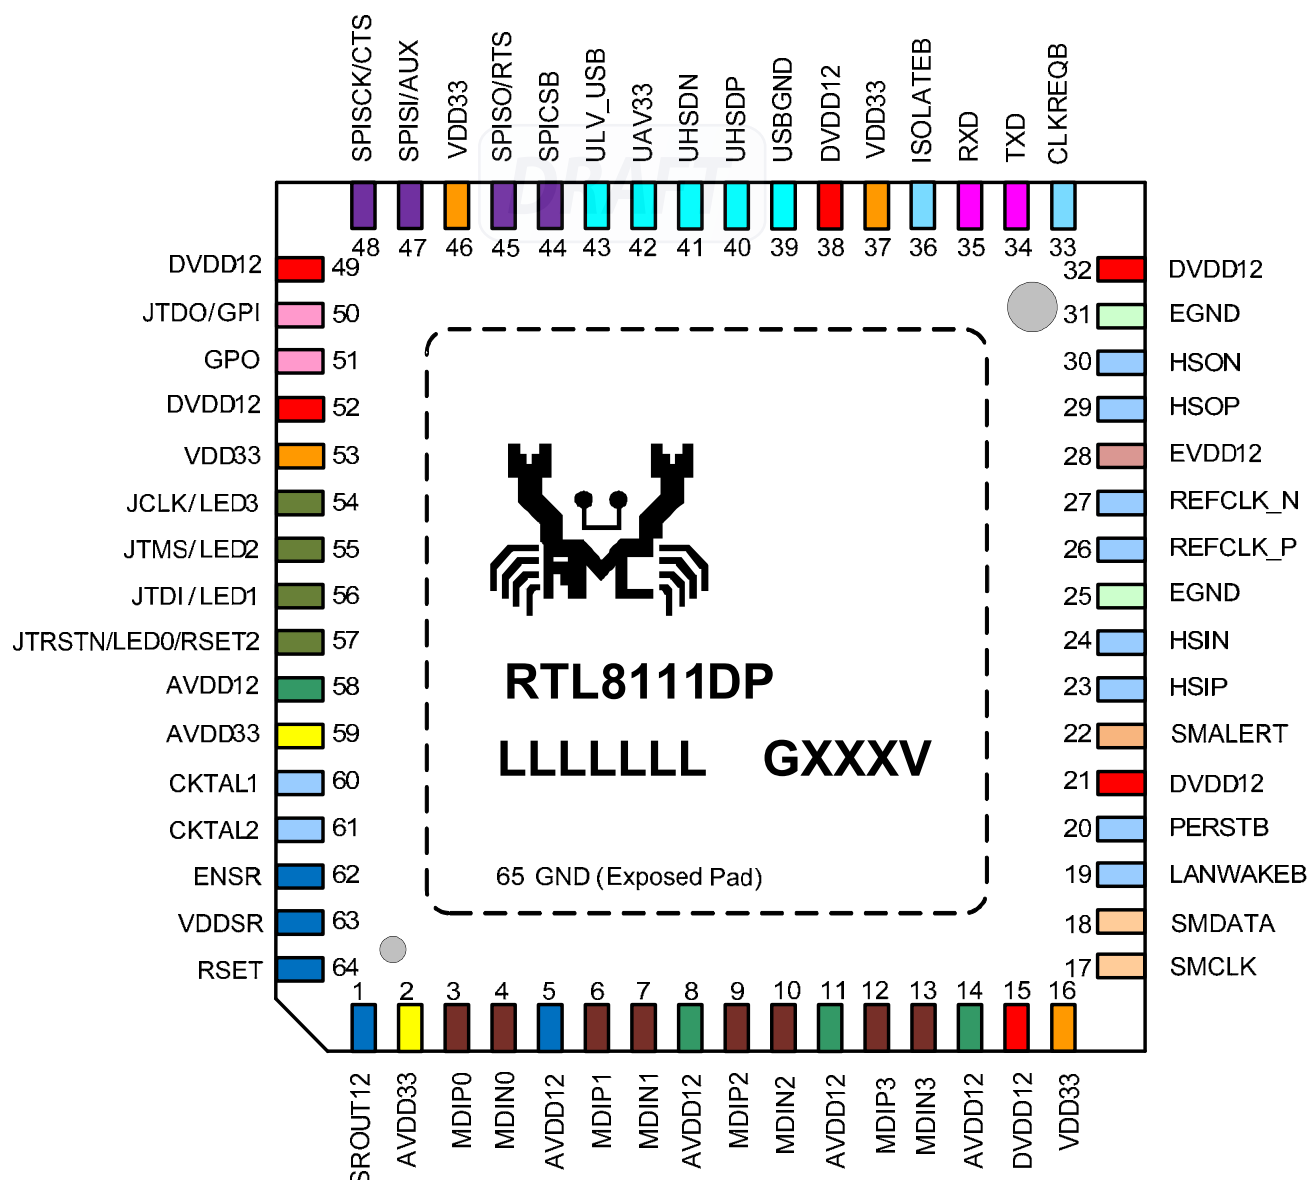


Figure 1. Pin Assignments

4.1. Package Identification

Green package is indicated by the 'G' in GXXXV (Figure 1). The version number is shown in the location marked 'V'.

5. Pin Descriptions

The signal type codes below are used in the following tables:

I: Input

O: Output

P: Power

G: Ground

O/D: Open Drain

DRAFT

5.1. Power Management/Isolation

Table 1. Power Management/Isolation

Symbol	Type	Pin No	Description
LANWAKEB	O/D	19	Power Management Event: Open drain, active low. Used to reactivate the PCI Express slot's main power rails and reference clocks.
ISOLATEB	I	36	Isolate Pin: Active low. Used to isolate the RTL8111DP from the PCI Express bus. The RTL8111DP will not drive its PCI Express outputs (excluding LANWAKEB) and will not sample its PCI Express input as long as the Isolate pin is asserted.

5.2. PCI Express Interface

Table 2. PCI Express Interface

Symbol	Type	Pin No	Description
REFCLK_P	I	26	PCI Express Differential Reference Clock Source: 100MHz $\pm$ 300ppm.
REFCLK_N	I	27	
HSOP	O	29	PCI Express Transmit Differential Pair.
HSOP	O	30	
HSIP	I	23	PCI Express Receive Differential Pair.
HSIN	I	24	
PERSTB	I	20	PCI Express Reset Signal: Active low. When the PERSTB is asserted at power-on state, the RTL8111DP returns to a pre-defined reset state and is ready for initialization and configuration after the de-assertion of the PERSTB.
CLKREQB	O/D	33	Reference Clock Request Signal. This signal is used by the RTL8111DP to request starting of the PCI Express reference clock.

5.3. SPI (Serial Peripheral Interface) Flash Pins

Table 3. SPI Flash Pins

Symbol	Type	Pin No	Description
SPICSB	O	44	SPI Flash Chip Select.
SPISO	I	45	Input from SPI Flash Serial Data Output Pin.
SPISI/AUX	O	47	SPISI: Output to SPI Flash Serial Data Input Pin. AUX: Input pin to detect if Aux. Power exists or not on initial power-on. This pin should be connected to SPI flash. To support wakeup from ACPI D3cold or APM power-down, this pin must be pulled high by Aux. Power via a resistor. If this pin is not pulled high by Aux. Power, the RTL8111DP assumes that no Aux. Power exists.
SPISCK	O	48	SPI Flash Serial Data Clock.

5.4. Transceiver Interface

Table 4. Transceiver Interface

Symbol	Type	Pin No	Description
MDIP0	IO	3	In MDI mode, this is the first pair in 1000Base-T, i.e., the BI_DA+/- pair, and is the transmit pair in 10Base-T and 100Base-TX.
MDIN0	IO	4	In MDI crossover mode, this pair acts as the BI_DB+/- pair, and is the receive pair in 10Base-T and 100Base-TX.
MDIP1	IO	6	In MDI mode, this is the second pair in 1000Base-T, i.e., the BI_DB+/- pair, and is the receive pair in 10Base-T and 100Base-TX.
MDIN1	IO	7	In MDI crossover mode, this pair acts as the BI_DA+/- pair, and is the transmit pair in 10Base-T and 100Base-TX.
MDIP2	IO	9	In MDI mode, this is the third pair in 1000Base-T, i.e., the BI_DC+/- pair.
MDIN2	IO	10	In MDI crossover mode, this pair acts as the BI_DD+/- pair.
MDIP3	IO	12	In MDI mode, this is the fourth pair in 1000Base-T, i.e., the BI_DD+/- pair.
MDIN3	IO	13	In MDI crossover mode, this pair acts as the BI_DC+/- pair.

5.5. Clock

Table 5. Clock

Symbol	Type	Pin No	Description
CKTAL1	I	60	Input of 25MHz Clock Reference.
CKTAL2	O	61	Output of 25MHz Clock Reference.

5.6. Regulator and Reference

Table 6. Regulator and Reference

Symbol	Type	Pin No	Description
SROUT12	O	1	Switching Regulator 1.2V Output. Connect to 4.7μH inductor.
ENSR	I	62	3.3V: Enable switching regulator. 0V: Disable switching regulator.
VDDSR	P	63	Digital 3.3V Power Supply for Switching Regulator.
RSET	I	64	Reference. External resistor reference.
RSET2	I	57	Reference. External resistor reference.

Note: Refer to the separate Layout Guide for switching regulator layout.

5.7. LEDs

Table 7. LEDs

Symbol	Type	Pin No	Description				
LED0	O	57	LEDS1-0	00	01	10	11
LED1	O	56	LED0	TX/RX	TX/RX	TX	LINK10/ACT
LED2	O	55	LED1	LINK100	LINK10/100/1000	LINK	LINK100/ACT
LED3	O	54	LED2	LINK10	LINK10/100	RX	FULL
			LED3	LINK1000	LINK1000	FULL	LINK1000/ACT

Note1: During power down mode, the LED signals are logic high.

Note2: LEDSI-0's initial value comes from the OTP memory. The hardware default value of the (LEDS1, LEDSI) = (1, 1).

5.8. Power and Ground

Table 8. Power and Ground

Symbol	Type	Pin No	Description
VDD33	P	16, 37, 46, 53	Digital 3.3V Power Supply.
DVDD12	P	15, 21, 32, 38, 49, 52	Digital 1.2V Power Supply.
AVDD12	P	5, 8, 11, 14, 58	Analog 1.05V Power Supply.
EVDD12	P	28	Analog 1.2V Power Supply.
AVDD33	P	2, 59	Analog 3.3V Power Supply.
EGND	G	25, 31	Analog Ground.
GND	G	65	Ground (Exposed Pad).

Note: Refer to the most updated schematic circuit for correct configuration.

5.9. GPIO Pins

Table 9. GPIO Pins

Symbol	Type	Pin No	Description
GPI	I	50	General Purpose Input Pin.
GPO	O	51	General Purpose Output Pin. This pin reflects the link up or link down state. High: Link up Low: Link down

5.10. USB Interface

Table 10. USB Interface

Symbol	Type	Pin No	Description
USBGND	I	39	USB Signal Ground.
UHSDP	IO	40	USB High-Speed D+.
UHSDN	IO	41	USB High-Speed D-.
UAV33	I	42	USB Analog Voltage 3.3V Input.
ULV_USB	I	43	USB Logic Voltage 1.2V Input.

5.11. UART Interface

Table 11. UART Interface

Symbol	Type	Pin No	Description
TXD	O	34	UART Data Transmit.
RXD	I	35	UART Data Receive.
RTS	O	45	Request to Send for UART.
CTS	I	48	Clear to Send for UART.

5.12. SMBus

Table 12. SMBus

Symbol	Type	Pin No	Description
SMCLK	IO	17	SMBus Clock.
SMDATA	IO	18	SMBus Data.
SMALERT	O	22	SMBus Assert Signal. SMALERT# is for a master-only host. If it is not used, do not connect to host

5.13. JTAG

Table 13. JTAG

Symbol	Type	Pin No	Description
JTDO	IO	50	Test Data Out.
JTDI	IO	56	Test Data In.
JCLK	I	54	Test Clock.
JTMS	I	55	Test Mode Select.
JTRSTN	I	57	Test Reset (Low Active).

DRAFT

6. Functional Description

6.1. *PCI Express Bus Interface*

The RTL8111DP complies with PCI Express Base Specification Revision 1.1, and runs at a 2.5GHz signaling rate with X1 link width, i.e., one transmit and one receive differential pair. The RTL8111DP supports four types of PCI Express messages: interrupt messages, error messages, power management messages, and hot-plug messages. To ease PCB layout constraints, PCI Express lane polarity reversal and link reversal are also supported.

6.1.1. **PCI Express Transmitter**

The RTL8111DP's PCI Express block receives digital data from the Ethernet interface and performs data scrambling with Linear Feedback Shift Register (LFSR) and 8B/10B coding technology into 10-bit code groups. Data scrambling is used to reduce the possibility of electrical resonance on the link, and 8B/10B coding technology is used to benefit embedded clocking, error detection, and DC balance by adding an overhead to the system through the addition of 2 extra bits. The data code groups are passed through its serializer for packet framing. The generated 2.5Gbps serial data is transmitted onto the PCB trace to its upstream device via a differential driver.

6.1.2. **PCI Express Receiver**

The RTL8111DP's PCI Express block receives 2.5Gbps serial data from its upstream device to generate parallel data. The receiver's PLL circuits are re-synchronized to maintain bit and symbol lock. Through 8B/10B decoding technology and data de-scrambling, the original digital data is recovered and passed to the RTL8111DP's internal Ethernet MAC to be transmitted onto the Ethernet media.

6.2. *LED Functions*

The RTL8111DP supports four LED signals in four different configurable operation modes. The following sections describe the various LED actions.

6.2.1. **Link Monitor**

The Link Monitor senses link integrity, such as LINK10, LINK100, LINK1000, LINK10/100/1000, LINK10/ACT, LINK100/ACT, or LINK1000/ACT. Whenever link status is established, the specific link LED pin is driven low. Once a cable is disconnected, the link LED pin is driven high, indicating that no network connection exists.

DRAFT

6.2.2. RX LED

In 10/100/1000Mbps mode, blinking of the RX LED indicates that receive activity is occurring.

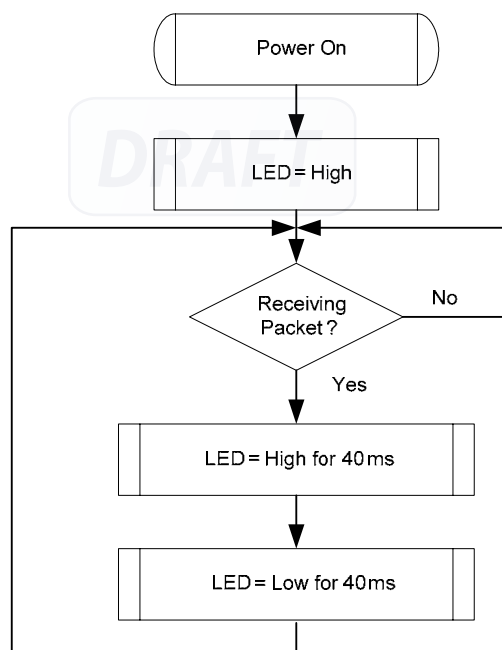


Figure 2. RX LED

6.2.3. TX LED

In 10/100/1000Mbps mode, blinking of the TX LED indicates that transmit activity is occurring.

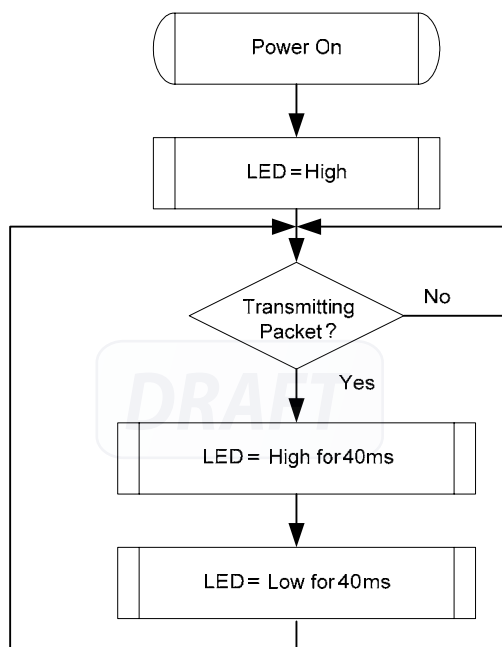


Figure 3. TX LED

6.2.4. TX/RX LED

In 10/100/1000Mbps mode, blinking of the TX/RX LED indicates that both transmit and receive activity is occurring.

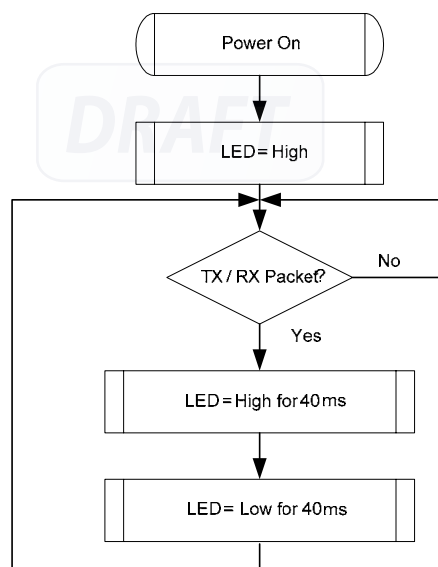


Figure 4. TX/RX LED

6.2.5. LINK/ACT LED

In 10/100/1000Mbps mode, blinking of the LINK/ACT LED indicates that the RTL8111DP is linked and operating properly. When this LED is high for extended periods, it indicates that a link problem exists.

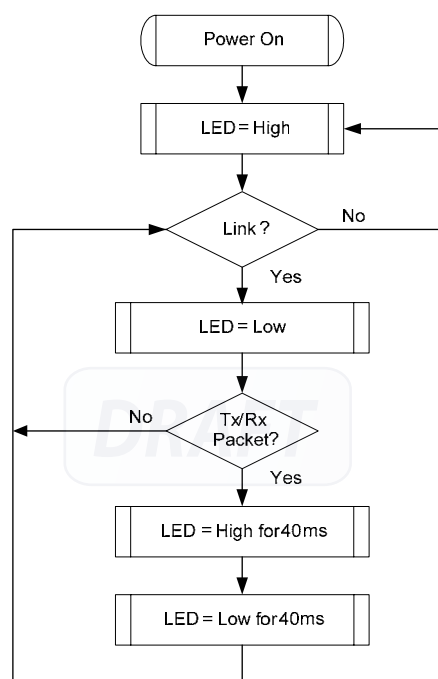


Figure 5. LINK/ACT LED

6.2.6. Customized LED Configuration

The RTL8111DP supports customizable LED operation modes via IO register offset 17h~18h. Table 14 describes the different LED actions.

Table 14. LED Select (IO Register Offset 17h~18h)

Bit	Symbol	RW	Description
15:12	LEDSEL3	RW	LED Select for PINLED3
11:8	LEDSEL2	RW	LED Select for PINLED2
7:4	LEDSEL1	RW	LED Select for PINLED1
3:0	LEDSEL0	RW	LED Select for PINLED0

When implementing customized LEDs:

- Set IO register offset 0x55 bit 6 to 1h to enable the customized LED function.
- Configure IO register offset 17h~18h to support your own LED signals. For example, if the value in the IO offset 0x17 is 0x8CA1h (1000110010100001b), the LED actions are:
 - LED 0 is only on in 10M mode, with no blinking of TX/RX
 - LED 1 is only on and with TX/RX blinking in 100M mode
 - LED 2 is only on and with TX/RX blinking in 1000M mode
 - LED 3 is only on in full duplex mode

Table 15. Customized LED

	LINK			ACT
Speed	Link 10M	Link100M	Link1000M	-
LED 0	Bit 0	Bit 1	Bit 2	Bit 3
LED 1	Bit 4	Bit 5	Bit 6	Bit 7
LED 2	Bit 8	Bit 9	Bit 10	Bit 11
LED 3	Bit 12	Bit 13	Bit 14	Bit 15

LED Pin	ACT=0	ACT=1
LINK=0	Floating	LED blinking in all speed TX/RX
LINK>0	LED on when selected speed link	LED blinking when selected speed TX/RX

Note1: ACT means blinking of TX and RX, and LINK indicates Link 10M, Link 100M, and Link 1000M.

Note2: There are four special modes

(Mode A) LED OFF Mode → Set all bits to 0.

(Mode B) Full Duplex LED Mode → Set LED 0=0, and either LED 1 or LED 2 or LED 3 >0.

LED 0=Full Duplex

LED 2=Follow Customized LED rule

LED 1=Follow Customized LED rule

LED 3=Follow Customized LED rule

(Mode C) Separated TX/RX LED Mode → Set LED0=0, LED1=0, LED2=X, LED3=1 (X mean any value).

LED 0=TX

LED 2=Follow Customized LED rule by using value X

LED 1=RX

LED 3=LINK

(Mode D) Separated Speed ACT Mode → Set LED0=0, LED1=1, LED2=X, LED3=1 (X mean any value).

LED 0=10ACT

LED 2=Follow Customized LED rule by using value X

LED 1=100ACT

LED 3=1000ACT

6.3. PHY Transceiver

6.3.1. PHY Transmitter

Based on state-of-the-art DSP technology and mixed-mode signal processing technology, the RTL8111DP operates at 10/100/1000Mbps over standard CAT.5 UTP cable (100/1000Mbps), and CAT.3 UTP cable (10Mbps).

GMII (1000Mbps) Mode

The RTL8111DP's PCS layer receives data bytes from the MAC through the GMII interface and performs the generation of continuous code-groups through 4D-PAM5 coding technology. These code groups are passed through a waveform-shaping filter to minimize EMI effect, and are transmitted onto the 4-pair CAT5 cable at 125Mbaud/s through a D/A converter.

MII (100Mbps) Mode

The transmitted 4-bit nibbles (TXD[3:0]) from the MAC, clocked at 25MHz (TXC), are converted into 5B symbol code through 4B/5B coding technology, then through scrambling and serializing, are converted to 125MHz NRZ and NRZI signals. After that, the NRZI signals are passed to the MLT3 encoder, then to the D/A converter and transmitted onto the media.

MII (10Mbps) Mode

The transmitted 4-bit nibbles (TXD[3:0]) from the MAC, clocked at 2.5MHz (TXC), are serialized into 10Mbps serial data. The 10Mbps serial data is converted into a Manchester-encoded data stream and is transmitted onto the media by the D/A converter.

6.3.2. PHY Receiver

GMII (1000Mbps) Mode

Input signals from the media pass through the sophisticated on-chip hybrid circuit to separate the transmitted signal from the input signal for effective reduction of near-end echo. Afterwards, the received signal is processed with state-of-the-art technology, e.g., adaptive equalization, BLW (Baseline Wander) correction, cross-talk cancellation, echo cancellation, timing recovery, error correction, and 4D-PAM5 decoding. The 8-bit-wide data is recovered and is sent to the GMII interface at a clock speed of 125MHz. The RX MAC retrieves the packet data from the receive MII/GMII interface and sends it to the RX Buffer Manager.

MII (100Mbps) Mode

The MLT3 signal is processed with an ADC, equalizer, BLW (Baseline Wander) correction, timing recovery, MLT3 and NRZI decoder, descrambler, 4B/5B decoder, and is then presented to the MII interface in 4-bit-wide nibbles at a clock speed of 25MHz.

MII (10Mbps) Mode

The received differential signal is converted into a Manchester-encoded stream first. Next, the stream is processed with a Manchester decoder and is de-serialized into 4-bit-wide nibbles. The 4-bit nibbles are presented to the MII interface at a clock speed of 2.5MHz.

6.4. Next Page

If 1000Base-T mode is advertised, three additional Next Pages are automatically exchanged between the two link partners. Users can set PHY Reg4.15 to 1 to manually exchange extra Next Pages via Reg7 and Reg8 as defined in IEEE 802.3ab.

6.5. SPI (Serial Peripheral Interface) Flash

The RTL8111DP supports the attachment of a 16MB (maximum) external Serial Peripheral Interface (SPI) Flash. The SPI flash provides 16MB bytes of serial reprogrammable flash memory.

SPI Flash is enabled by the RTL8111DP through the Chip Select pin, and accessed via a 3-wire interface consisting of Serial Data Input (SI), Serial Data Output (SO), and Serial Clock (SCK). The SPI flash utilizes an 8-bit instruction register. All instructions, addresses, and data are transferred with the MSB first and start with a high-to-low transition.

Compared to a parallel bus interface, the Serial Peripheral Interface provides simpler wiring and much less interaction (crosstalk) among the conductors in the cable. This minimizes the number of conductors, pins, and the IC package size, reducing the cost of making, assembling, and testing the electronics.

Table 16. SPI Flash Interface

SPI Flash	Description
SO	Input Data Bus
SI	Output Data Bus
SCK	SPI Flash Serial Data Clock
CS	SPI Flash Chip Select

6.6. Power Management

The RTL8111DP complies with ACPI (Rev 1.0, 1.0b, 2.0), PCI Power Management (Rev 1.1), PCI Express Active State Power Management (ASPM), and Network Device Class Power Management Reference Specification (V1.0a), such as to support an Operating System-directed Power Management (OSPM) environment.

The RTL8111DP can monitor the network for a Wakeup Frame or a Magic Packet, and notify the system via a PCI Express Power Management Event (PME) Message, or LANWAKEB pin when such a packet or event occurs. The system is then restored to a normal state to process incoming jobs.

When the RTL8111DP is in power down mode (D1 ~ D3):

- The RX state machine is stopped. The RTL8111DP monitors the network for wakeup events such as a Magic Packet and Wakeup Frame in order to wake up the system. When in power down mode, the RTL8111DP will not reflect the status of any incoming packets in the ISR register and will not receive any packets into the RX on-chip buffer.
- The on-chip buffer status and packets that have already been received into the RX on-chip buffer before entering power down mode are held by the RTL8111DP.

- Transmission is stopped. PCI Express transactions are stopped. The TX on-chip buffer is held.
- After being restored to D0 state, the RTL8111DP transmits data that was not moved into the TX on-chip buffer during power down mode. Packets that were not transmitted completely last time are re-transmitted.

The D3_{cold}_support_PME bit (bit15, PMC register) and the Aux_I_b2:0 bits (bit8:6, PMC register) in PCI configuration space depend on the existence of Aux power. If aux. power is absent, the above 4 bits are all 0 in binary.

Example:

If the D3c_support_PME (PMC parameter in OTP memory) = 1:

- If aux. power exists, then PMC in PCI config space is the same as OTP memory PMC (if OTP memory PMC = C3 FF, then PCI PMC = C3 FF)
- If aux. power is absent, then PMC in PCI config space is the same as OTP memory PMC except the above 4 bits are all 0's (if OTP memory PMC = C3 FF, then PCI PMC = 03 7E)

In the above case, if wakeup support is desired when main power is off, OTP memory PMC should be set to C3 FF (Realtek PCI config space default value).

If OTP memory D3c_support_PME = 0:

- If aux. power exists, then PMC in PCI config space is the same as OTP memory PMC (if OTP memory PMC = C3 7F, then PCI PMC = C3 7F)
- If aux. power is absent, then PMC in PCI config space is the same as OTP memory PMC except the above 4 bits are all 0's (if OTP memory PMC = C3 7F, then PCI PMC = 03 7E)

In the above case, if wakeup support is not desired when main power is off, it is suggested that the OTP memory PMC should be set to 03 7E.

Magic Packet Wakeup occurs only when the following conditions are met:

- The destination address of the received Magic Packet is acceptable to the RTL8111DP, e.g., a broadcast, multicast, or unicast packet addressed to the current RTL8111DP adapter.
- The received Magic Packet does not contain a CRC error.
- The Magic bit (CONFIG3#5) is set to 1, the PMEn bit (CONFIG1#0) is set to 1, and the corresponding wake-up method (message or LANWAKEB) can be asserted in the current power state.
- The Magic Packet pattern matches, i.e., 6 * FFh + MISC (can be none) + 16 * DID (Destination ID) in any part of a valid Ethernet packet.

A Wakeup Frame event occurs only when the following conditions are met:

- The destination address of the received Wakeup Frame is acceptable to the RTL8111DP, e.g., a broadcast, multicast, or unicast address to the current RTL8111DP adapter.
- The received Wakeup Frame does not contain a CRC error.
- The PMEn bit (CONFIG1#0) is set to 1.
- The 16-bit CRC* of the received Wakeup Frame matches the 16-bit CRC of the sample Wakeup Frame pattern given by the local machine's OS. Or, the RTL8111DP is configured to allow direct packet wakeup, e.g., a broadcast, multicast, or unicast network packet.

Note: 16-bit CRC: The RTL8111DP supports eight long wakeup frames (covering 128 mask bytes from offset 0 to 127 of any incoming network packet).

The corresponding wake-up method (message or LANWAKEB) is asserted only when the following conditions are met:

- The PMEn bit (bit0, CONFIG1) is set to 1.
- The PME_En bit (bit8, PMCSR) in PCI Configuration Space is set to 1.
- The RTL8111DP may assert the corresponding wake-up method (message or LANWAKEB) in the current power state or in isolation state, depending on the PME_Support (bit15-11) setting of the PMC register in PCI Configuration Space.
- A Magic Packet, LinkUp, or Wakeup Frame has been received.
- Writing a 1 to the PME_Status (bit15) of the PMCSR register in the PCI Configuration Space clears this bit and causes the RTL8111DP to stop asserting the corresponding wake-up method (message or LANWAKEB) (if enabled).

When the RTL8111DP is in power down mode, e.g., D1~D3, the IO and MEM accesses to the RTL8111DP are disabled. After a PERSTB assertion, the device's power state is restored to D0 automatically if the original power state was D3_{cold}. There is almost no hardware delay at the device's power state transition. When in ACPI mode, the device does not support PME (Power Management Enable) from D0 (this is the Realtek default setting of the PMC register auto-loaded from OTP memory). The setting may be changed from the OTP memory, if required.

DRAFT

6.7. Receive-Side Scaling (RSS)

The RTL8111DP complies with the Network Driver Interface Specification (NDIS) 6.0 Receive-Side Scaling (RSS) technology for the Microsoft Windows family of operating systems. RSS allows packet receive-processing from a network adapter to be balanced across the number of available computer processors, increasing performance on multi-CPU platforms.

6.7.1. Receive-Side Scaling (RSS) Initialization

During RSS initialization, the Windows operating system will inform the RTL8111DP to store the following parameters: Hash function, hash type, hash bits, indirection table, BaseCPUNumber, and the secret hash key.

Hash Function

The default hash function is the Toeplitz hash function.

Hash Type

The hash types indicate which field of the packet needs to be hashed to get the hash result. There are several combinations of these fields, mainly, TCP/IPv4, IPv4, TCP/IPv6, IPv6, and IPv6 extension headers.

- TCP/IPv4 requires hash calculations over the IPv4 source address, the IPv4 destination address, the source TCP port and the destination TCP port.
- IPv4 requires hash calculations over the IPv4 source address and the IPv4 destination address.
- TCP/IPv6 requires hash calculations over the IPv6 source address, the IPv6 destination address, the source TCP port and the destination TCP port.
- IPv6 requires hash calculations over the IPv6 source address and the IPv6 destination address
(Note: The RTL8111DP does not support the IPv6 extension header hash type in RSS).

Hash Bits

Hash bits are used to index the hash result into the indirection table

Indirection Table

The Indirection Table stores values that are added to the BaseCPUNumber to enable RSS interrupts to be restricted from some CPUs. The OS will update the Indirection Table to rebalance the load.

BaseCPUNumber

The lowest number CPU to use for RSS. BaseCPUNumber is added to the result of the indirection table lookup.

Secret Hash Key

The key used in the Toeplitz function. For different hash types, the key size is different.

6.7.2. RSS Operation

After the parameters are set, the RTL8111DP will start hash calculation on each incoming packet and forward each packet to its correct queue according to the hash result. If the incoming packet is not in the hash type, it will be forwarded to the primary queue. The hash result plus the BaseCPUNumber will be indexed into the indirection table to get the correct CPU number. The RTL8111DP uses three methods to inform the system of incoming packets: Inline interrupt, MSI, and MSIX. Periodically the OS will update the indirection table to rebalance the load across the CPUs.

6.8. Alert Specification Format (ASF)

ASF (Alert Standard Format) is a standard developed by the Pre-OS Working Group under DMTF (Distributed Management Task Force). ASF helps network management through capabilities such as system health monitoring, asset protection, and remote control.

IT departments have many choices regarding network management, but not all network management can operate in low-power and OS-absent states. ASF allows IT managers to manage and access the managed clients in an OS-absent environment.

From a technological point of view, an ASF managed client can provide advance warnings and system failure indications to the remote management console. The Ethernet controller sits on the motherboard or a plug-in network adapter card (NIC) in the local system. It collects information from various components in the system, including the CPU, chipset, BIOS, and sensors on the motherboard. It sends collected information to the management console running on a remote server.

6.8.1. Security-Extensions

RMCP Security-Extensions Protocol (RSP) provides integrity and anti-replay services for RMCP messages. When RSP is used, an entire RMCP message is encapsulated in an RSP header and trailer.

- An RSP header is inserted between the UDP header and the RMCP header, and its presence is identified by the use of the RMCP security extensions UDP port number (0298h). The RSP header contains two fields: Session ID and Sequence Number. A Session ID is an arbitrary number used to identify the particular session state (algorithms, keys, etc). A Sequence Number is a unique monotonically increasing number which is used for the 32-bit sliding window anti-replay mechanism.
- An RSP trailer is located following the end of the RMCP message's Data block (i.e., security extensions are applied above the UDP layer). An RSP trailer contains 4 fields: Pad, Pad Length, Next Header, and Integrity Data. An integrity algorithm (e.g., HMAC-SHA1-96 defined in [RFC2404]) is performed over the specific fields of the RSP Header, RMCP Message, and RSP trailer. The result is placed in the Integrity Data field in the RSP trailer.

6.8.2. ASF (Alert Standard Format) 2.0 Support

Watchdog Timer

The RTL8111DP supports two sets of start/stop watchdog timer. One is a software watchdog timer. The other is a firmware watchdog timer counter. The system BIOS supports an SMBus interface running SMBus Messages. The system initiating a 'power on' state enables the firmware watchdog timer of the RTL8111DP.

ARP Ethernet

The RTL8111DP supports auto-response ARP Ethernet packets in an OS-absent environment.

System Heartbeat and Alert PET

The RTL8111DP supports system heartbeat and Platform Event Trap (PET) Alert packets. System heartbeat is a periodic message sent by the managed client indicating its presence to the management console. A PET alert is an alert message regarding environment, system firmware, and OS events sent by the managed client to the management console.

RMCP and Remote Control

The RTL8111DP supports RMCP messages and remote control packets.

- RMCP Messages
 - Presence of ping/pong packets (80h/40h)
Used to identify the presence of an ASF/RMCP-aware managed client on the network.
 - System state request/response packet (81h/41h)
Used to identify the state of the managed client.
 - Capability request/response (82h/42h)
Used to identify the client system's ASF capability.
 - Open session request/response (83h/43h)
Used to establish a protected session between the management console and the managed client.
 - Close session request/response (84h/44h)
Used to close a protected session.
- Support for four sets of remote control actions
 - Reset (10h), Power on (11h), Power off (12h), Power cycle reset (13h) (Refer to the ASF 2.0 specifications for more details)

ASF SMBus Messages

The RTL8111DP supports a SMBus interface that is capable of operating in master or slave mode (refer to the SMBus 2.0 and ASF 2.0 specifications for more details about ASF SMBus Messages).

The RTL8111DP's ASF SMBus Messages are listed below:

- **SMBus ARP Messages**
The RTL8111DP gets an SMBus Address from system firmware.
- **ASF-Sensor Poll Messages (Get Event Status and Get Event Data)**
The RTL8111DP monitors the system state through Get Event Status and Get Event Data messages, which poll ASF-sensors for individual events and present event status. The RTL8111DP sends Platform Event Trap (PET) alerts to the management console when it observes abnormal events.
- **Legacy Sensor Device Poll Message**
The RTL8111DP monitors 8 sets of legacy sensors in the motherboard.
- **Start Watchdog Timer**
The system firmware starts the RTL8111DP's watchdog timer with a start watchdog timer message. If the watchdog timer times out, the RTL8111DP will send a PET alert.
- **Stop Watchdog Timer**
The system firmware stops the RTL8111DP's watchdog timer with a stop watchdog timer message.
- **Push Alert Messages (Message with/without retransmission)**
This message is used when the system firmware and sensors notify the RTL8111DP to send a PET alert.
- **Set System State Message**
This message is used by the managed client's firmware to record the client's current System State into the RTL8111DP.
- **Device Type Poll Message**
Allows a SMBus master to further determine the characteristics of a SMBus 2.0 device that responds to an ARP cycle with the ASF bit of its interface byte set to 1.
- **Remote-Control Device Action Message**
The RTL8111DP forces a remote control action to the managed client via a Remote-Control Device Action message.
- **Boot Option Message**
This message uses the SMBus Block Read Protocol. The managed client's firmware uses this message to retrieve the options sent over the network to the RTL8111DP via the RMCP commands: Reset (10h), Power-up (11h), and Power Cycle Reset (13h).

6.9. Realtek RealManage (DASH 1.1 Compliant)

Realtek RealManage technology provides remote management features based on the DMTF standards, including the Desktop and mobile Architecture for System Hardware (DASH 1.1) Initiative. The DASH initiative contains a set of specifications to achieve web services management for remote desktop and mobile systems over a secure out-of-band channel (Refer to *DASH Implementation Requirements (DSP0232)* for more details).

6.9.1. DASH Profile Support

Each profile defines a property to provide management information. Table 17, Table 18, and Table 19 list the methods used in the RTL8111DP to gather this information.

Table 17. Profiles Defined in DASH 1.0

Profile	Requirement	Profile Support	Support Method
Base Desktop and Mobile	Mandatory	✓	N/A
Profile Registration	Mandatory	✓	N/A
Role Based Authorization	Mandatory	✓	N/A
Simple Identity Management	Mandatory	✓	N/A
Boot Control	Optional	✓	PLDM/MCTP/SMBus
CPU	Optional	✓	PLDM/MCTP/SMBus
Fan	Optional	✓	Legacy Sensor Polling
Indications	Optional	✓	N/A
Physical Asset	Optional	✓	PLDM/MCTP/SMBus
Power State Management	Optional	✓	SMBus/Software Agent
Power Supply	Optional	-	-
Sensors	Optional	✓	Legacy Sensor Polling
Software Inventory	Optional	✓	Software Agent
System Memory	Optional	✓	PLDM/MCTP/SMBus

Table 18. Profiles Defined in DASH 1.1

Profile	Requirement	Profile Support	Support Method
Battery	Optional	-	-
BIOS Management	Optional	✓	PLDM/MCTP/SMBus
DHCP Client	Optional	✓	N/A
DNS Client	Optional	✓	N/A
Ethernet Port	Optional	✓	N/A
Host LAN Network Port	Optional	✓	N/A
IP Interface	Optional	✓	N/A
KVM Redirection	Optional	-	-
Media Redirection	Optional	-	-
Opaque Management Data	Optional	✓	N/A
OS Status	Optional	✓	Software Agent
Software Update	Optional	✓	N/A
Text Console Redirection	Optional	✓	N/A
USB Redirection	Optional	✓	N/A

Table 19. Other DMTF Profiles

Profile	Requirement	Profile Support	Support Method
Record Log	Optional	✓	N/A
SSH	Optional	✓	N/A
Computer System	Optional	✓	N/A

6.9.2. Protocol Implementation Requirements

DASH uses a CIM-based data model for representing managed resources and services that consists of Management Protocol and Transport Protocol layers.

Management Protocol

DASH uses the protocol defined in Web Services for Management Specification (DSP226) as the management protocol for supporting operations. Web Services for Management (WS-MAN) includes the following operations: WS-Transfer, WS-Enumeration, and WS-Eventing. WS-Transfer consists of GET and PUT actions; WS-Enumeration is used to get the CIM instances in the management system; WS-Eventing is used for alert events subscription and delivery.

Transport Protocol

DASH uses the HTTP 1.1 as the SOAP transport, and TCP and IP as Transport Protocol to transfer web service packets.

The CIM profiles, Management Protocol, and Transport Protocol are written into firmware.

6.9.3. Security Implementation Requirement

This section describes transport requirements, roles and authorization, and user account management.

Transport Requirements

The RTL8111DP defines two security classes for HTTP 1.1 transport:

Class A: Requires HTTP digest authentication for the user authentication. For this class, no encryption capabilities are required beyond the encryption of the password during the digest authentication exchange.

Class B: Defines two security profiles that are based on TLS (Transport Layer Security) with specifically selected modes and cryptographic algorithms.

Roles and Authorization

The RTL8111DP supports the Operational Roles as follows:

- Read-only User
- Operator
- Administrator

User Account Management

The RTL8111DP supports operations for user account management and the respective DASH requirements as follows:

- Create an account
- Delete an account
- Modify the privileges of an account
- Modify the password of an account
- Change the role of an account

6.9.4. Discovery Requirements

Multiple discovery stages are required to accumulate the necessary information from the managed system.

Network Endpoint Discovery Stage

The RTL8111DP supports the endpoint discovery methods described in the *Desktop and Mobile Systems Management White Paper* (DSP2014).

Management Access Point (MAP) Discovery Stage

The RTL8111DP supports the following phase process for MAP discovery:

Phase 1: RMCP Presence Ping/Pong.

Phase 2: WS-Management Identify method.

6.10. IP Security Offload

The Internet Protocol security (IPSEC) protocol suite is based on powerful encryption technologies, and adds security services to the IP layer that are compatible with both IPv4 and IPv6. With IPsec, users can create a secure VPN on demand.

6.10.1. IP Security Offload Crypto Engine

Using simple Source Address (SA) management, the IPsec Offload Crypto Engine is a partial ‘bump-in-the-wire’ implementation that handles only the encryption, decryption, and Integrity Check Value (ICV) calculation and check of the packet.

On the transmit side, it requires the TCP/IP stack to form the IPsec format before the engine calculates the ICV and encrypts the packet. The receive side requires TCP/IP stack to handle the sequence number check and parse through the AH/ESP protocol.

6.10.2. IP Security Offload Features

The RTL8111DP supports IP security offload features as follows:

- Modes
 - IPv4 AH/ESP protocol with AH&ESP combined mode. Processing of the IP option is not supported
 - IPv6 AH/ESP extension Headers with AH&ESP combined mode. Processing of Non-IPsec extension headers is not supported
- Supports Transport Mode
- Supports up to 16 SAs (TX and RX). Combined mode IPsec connection will handle two SAs per connection
- Crypto algorithm
 - Line-speed guaranteed
 - Algorithm for AH: HMAC-sha1, AES-GMAC-128/192/256
 - Algorithm for ESP: HMAC-sha1, AES-GMAC-128/192/256, AES-GCM-128/192/256
- Compatible with Windows IPsec Offload V2 function. Supports combination LSOv2 + IPsecV2 (IPsecV2 Offload is supported under NDIS 6.1 and later versions)

DRAFT

7. Characteristics

7.1. Absolute Maximum Ratings

WARNING: Absolute maximum ratings are limits beyond which permanent damage may be caused to the device, or device reliability will be affected. All voltages are specified reference to GND unless otherwise specified.

Table 20. Absolute Maximum Ratings

Symbol	Description	Minimum	Maximum	Unit
VDD33, AVDD33, UAV33	Supply Voltage 3.3V	-0.3	+0.30	V
EVDD12, DVDD12, ULV_USB	Supply Voltage 1.2V	-0.3	+0.12	V
AVDD12	Supply Voltage 1.05V	-0.3	+0.12	V
Dcinput	Input Voltage	-0.3	Corresponding Supply Voltage + 0.5	V
Dcoutput	Output Voltage	-0.3	Corresponding Supply Voltage + 0.5	V
N/A	Storage Temperature	-55	+125	°C

Note: Refer to the most updated schematic circuit for correct configuration.

7.2. Recommended Operating Conditions

Table 21. Recommended Operating Conditions

Description	Symbol	Minimum	Typical	Maximum	Unit
Supply Voltage VDD	VDD33, AVDD33, UAV33	2.97	3.3	3.63	V
	EVDD12, DVDD12, ULV_USB	1.1	1.2	1.32	V
	AVDD12	1.0	1.05	1.09	V
Ambient Operating Temperature T _A	-	0	-	70	°C
Maximum Junction Temperature	-	-	-	125	°C

Note: Refer to the most updated schematic circuit for correct configuration.

DRAFT

7.3. Crystal Requirements

Table 22. Crystal Requirements

Symbol	Description/Condition	Minimum	Typical	Maximum	Unit
F _{ref}	Parallel resonant crystal reference frequency, fundamental mode, AT-cut type.	-	25	-	MHz
F _{ref} Stability	Parallel resonant crystal frequency stability, fundamental mode, AT-cut type. T _a = 0°C ~ +70°C.	-30	-	+30	ppm
F _{ref} Tolerance	Parallel resonant crystal frequency tolerance, fundamental mode, AT-cut type. T _a = 25°C.	-50	-	+50	ppm
F _{ref} Duty Cycle	Reference Clock Input Duty Cycle.	40	-	60	%
ESR	Equivalent Series Resistance.	-	-	30	Ω
DL	Drive Level.	-	-	0.5	mW

Note: The CLK source can come from other places in the system, but it must accord with the parameters above.

7.4. Oscillator Requirements

Table 23. Oscillator Requirements

Parameter	Condition	Minimum	Typical	Maximum	Unit
Frequency	-	-	25	-	MHz
Frequency Stability	T _a = 0°C~+70°C	-30	-	+30	ppm
Frequency Tolerance	T _a = 25°C	-50	-	+50	ppm
Duty Cycle	-	40	-	60	%
Broadband Peak to Peak Jitter	-	-	-	200	ps
Vp-p	-	3.15	3.3	3.45	V
Rise Time	-	-	-	10	ns
Fall Time	-	-	-	10	ns
Operating Temperature Range	-	0	-	70	°C

Note 1: The CLK source can come from other places in the system, but it must accord with the parameters above.

Note 2: Broadband RMS=9ps; 25KHz to 25MHz RMS=3ps.

7.5. Thermal Characteristics

Table 24. Thermal Characteristics

Parameter	Minimum	Maximum	Units
Storage Temperature	-55	+125	°C
Ambient Operating Temperature	0	70	°C

7.6. DC Characteristics

Table 25. DC Characteristics

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Units
VDD33, AVDD33, UAV33	3.3V Supply Voltage	-	2.97	3.3	3.63	V
EVDD12, DVDD12, ULV_USB	1.2V Supply Voltage	-	1.1	1.2	1.32	V
AVDD12	1.05V Supply Voltage	-	1.0	1.05	1.09	V
V _{oh}	Minimum High Level Output Voltage	I _{oh} = -4mA	0.9*VDD33	-	VDD33	V
V _{ol}	Maximum Low Level Output Voltage	I _{ol} = 4mA	0	-	0.1*VDD33	V
V _{ih}	Minimum High Level Input Voltage	-	1.8	-	-	V
V _{il}	Maximum Low Level Input Voltage	-	-	-	0.8	V
I _{in}	Input Current	V _{in} = VDD33 or GND	0	-	0.5	μA
I _{cc33}	Average Operating Supply Current from 3.3V	At 1Gbps with heavy network traffic	-	107	-	mA
I _{cc12}	Average Operating Supply Current from 1.2V	At 1Gbps with heavy network traffic	-	372	-	mA
I _{cc105}	Average Operating Supply Current from 1.05V	At 1Gbps with heavy network traffic	-	96	-	mA

Note: Refer to the most updated schematic circuit for correct configuration.

DRAFT

7.7. AC Characteristics

7.7.1. SPI Flash Interface Timing

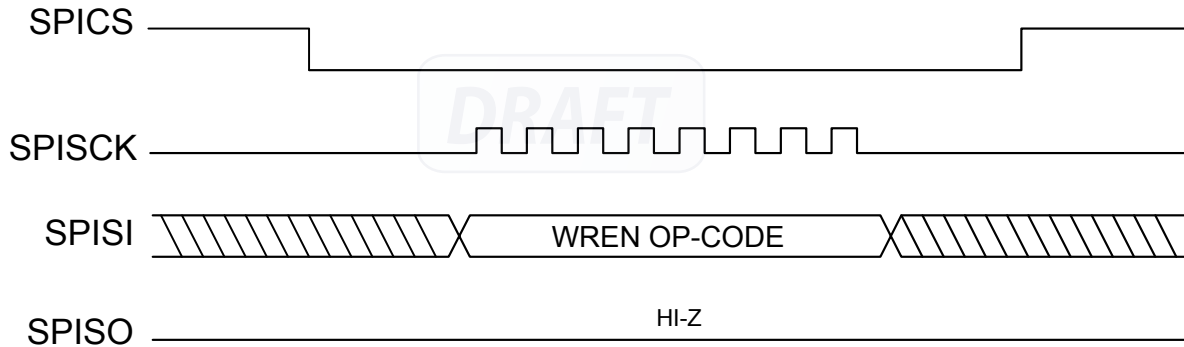


Figure 6. WREN Timing

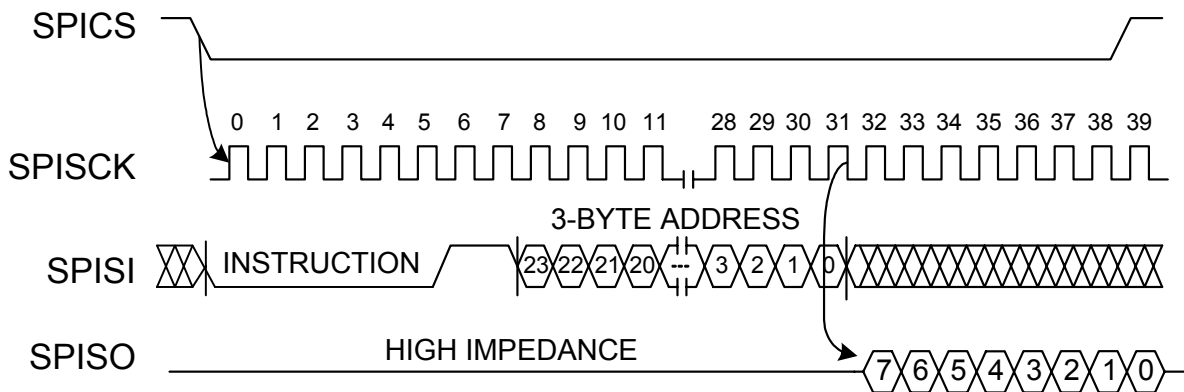


Figure 7. Read Timing

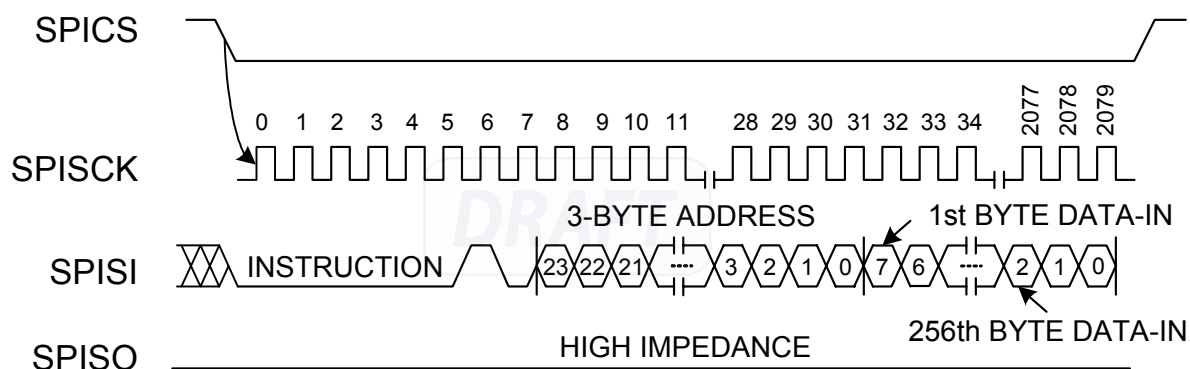


Figure 8. Program Timing

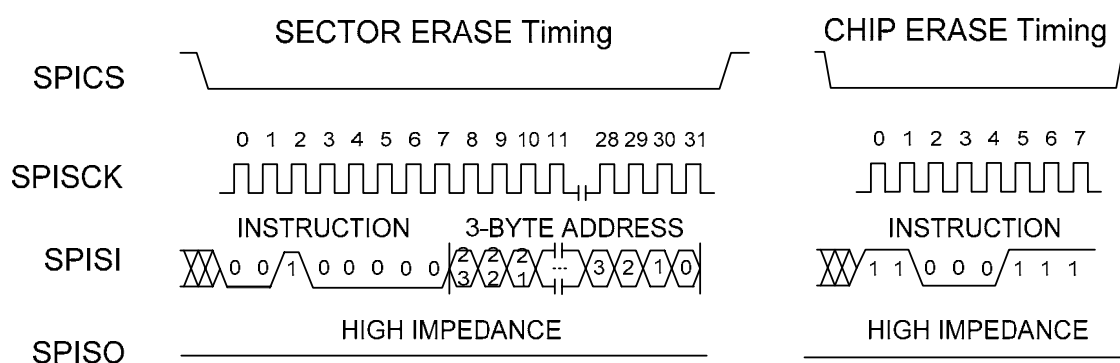


Figure 9. Sector/Chip Erase Timing

DRAFT

7.7.2. SPI Flash Commands

Table 26. SPI Flash Commands

Command	Command Code
WREN	06h
WRDI	04h
RDID	9Fh
RDSR	05h
WRSR	01h
Read	03h
Page Program	02h
Sector Erase (4K)	20h
Block Erase (64K)	D8h
Chip Erase	60h or C7h

7.7.3. SPI Flash Type Supported

Table 27. SPI Flash Type Supported

Manufacturer	Flash Part No.	Density (Mb)	Max Freq (MHz)
MXIC	25L4006E	4	86
	25L4005A	4	85
	25L8006E	8	86
	25L1606E	16	86
	25L1605D	16	86
Winbond	W25X40BV	4	104
	W25Q40BV	4	104
	W25X40AV	4	100
	W25Q80BV	8	104
	W25X80AV	8	100
	W25X16BV	16	80
	W25Q16BV	16	80
	W25X16AV	16	75
Numonyx	M25PX80	8	75

Note1: The Flash clock frequency should be 33MHz or above.

Note2: Flash density should be 4Mb or above. For feature extensions, 8Mb is recommended.

7.8. PCI Express Bus Parameters

7.8.1. Differential Transmitter Parameters

Table 28. Differential Transmitter Parameters

Symbol	Parameter	Min	Typical	Max	Units
UI	Unit Interval	399.88	400	400.12	ps
$V_{TX-DIFFp-p}$	Differential Peak to Peak Output Voltage	0.800	-	1.2	V
$V_{TX-DE-RATIO}$	De-Emphasized Differential Output Voltage (Ratio)	-3.0	-3.5	-4.0	dB
T_{TX-EYE}	Minimum TX Eye Width	0.75	-	-	UI
$T_{TX-EYE-MEDIAN-to-MAX-JITTER}$	Maximum Time between The Jitter Median and Maximum Deviation from The Median	-	-	0.125	UI
$T_{TX-RISE}, T_{TX-FALL}$	D+/D- TX Output Rise/Fall Time	0.125	-	-	UI
$V_{TX-CM-Acp}$	RMS AC Peak Common Mode Output Voltage	-	-	20	mV
$V_{TX-CM-DCACTIVE-IDLEDELTA}$	Absolute Delta of DC Common Mode Voltage During L0 and Electrical Idle	0	-	100	mV
$V_{TX-CM-DCLINE-DELTA}$	Absolute Delta of DC Common Mode Voltage between D+ and D-	0	-	25	mV
$V_{TX-IDLE-DIFFp}$	Electrical Idle Differential Peak Output Voltage	0	-	20	mV
$V_{TX-RCV-DETECT}$	The Amount of Voltage Change Allowed During Receiver Detection	-	-	600	mV
$V_{TX-DC-CM}$	The TX DC Common Mode Voltage	0	-	3.6	V
$I_{TX-SHORT}$	TX Short Circuit Current Limit	-	-	90	mA
$T_{TX-IDLE-MIN}$	Minimum Time Spent in Electrical Idle	50	-	-	UI
$T_{TX-IDLE-SETTO-IDLE}$	Maximum Time to Transition to a Valid Electrical Idle after Sending an Electrical Idle Ordered Set	-	-	20	UI
$T_{TX-IDLE-TOTO-DIFF-DATA}$	Maximum Time to Transition to Valid TX Specifications After Leaving An Electrical Idle Condition	-	-	20	UI
$RL_{TX-DIFF}$	Differential Return Loss	10	-	-	dB
RL_{TX-CM}	Common Mode Return Loss	6	-	-	dB
$Z_{TX-DIFF-DC}$	DC Differential TX Impedance	80	100	120	Ω
$L_{TX-SKEW}$	Lane-to-Lane Output Skew	-	-	$500+2*UI$	ps
C_{TX}	AC Coupling Capacitor	75	-	200	nF
$T_{crosslink}$	Crosslink Random Timeout	0	-	1	ms

Note1: Refer to PCI Express Base Specification, rev.1.1, for correct measurement environment setting of each parameter.

Note2: The data rate can be modulated with an SSC (Spread Spectrum Clock) from +0 to -0.5% of the nominal data rate frequency, at a modulation rate in the range not exceeding 30kHz – 33kHz. The $\pm 300ppm$ requirement still holds, which requires the two communicating ports be modulated such that they never exceed a total of 600ppm difference.

7.8.2. Differential Receiver Parameters

Table 29. Differential Receiver Parameters

Symbol	Parameter	Min.	Typical	Max.	Units
UI	Unit Interval	399.88	400	400.12	ps
V _{RX-DIFFp-p}	Differential Input Peak to Peak Voltage	0.175	-	1.200	V
T _{RX-EYE}	Minimum Receiver Eye Width	0.4	-	-	UI
T _{RX-EYE-MEDIAN-to-MAX-JITTER}	Maximum Time Between the Jitter Median and Maximum Deviation from the Median	-	-	0.3	UI
V _{RX-CM-Acp}	AC Peak Common Mode Input Voltage	-	-	150	mV
RL _{RX-DIFF}	Differential Return Loss	10	-	-	dB
RL _{RX-CM}	Common Mode Return Loss	6	-	-	dB
Z _{RX-DIFF-DC}	DC Differential Input Impedance	80	100	120	Ω
Z _{RX-DC}	DC Input Impedance	40	50	60	Ω
Z _{RX-HIGH-IMP-DC}	Powered Down DC Input Impedance	200k	-	-	Ω
V _{RX-IDLE-DET-DIFFp-p}	Electrical Idle Detect Threshold	65	-	175	mV
T _{RX-IDLE-DET-DIFFENTERTIME}	Unexpected Electrical Idle Enter Detect Threshold Integration Time	-	-	10	ms
L _{RX-SKEW}	Total Skew	-	-	20	ns

Note: Refer to PCI Express Base Specification, rev.1.1, for correct measurement environment setting of each parameter.

7.8.3. REFCLK Parameters

Table 30. REFCLK Parameters

Symbol	Parameter	100MHz Input		Units	Note
		Min	Max		
Rise Edge Rate	Rising Edge Rate	0.6	4.0	V/ns	2, 3
Fall Edge Rate	Falling Edge Rate	0.6	4.0	V/ns	2, 3
V _{IH}	Differential Input High Voltage	+150	-	mV	2
V _{IL}	Differential Input Low Voltage	-	-150	mV	2
V _{CROSS}	Absolute Crossing Point Voltage	+250	+550	mV	1, 4, 5
V _{CROSS DELTA}	Variation of V _{CROSS} Over All Rising Clock Edges	-	+140	mV	1, 4, 9
V _{RB}	Ring-Back Voltage Margin	-100	+100	mV	2, 12
T _{STABLE}	Time Before V _{RB} is Allowed	500	-	ps	2, 12
T _{PERIOD AVG}	Average Clock Period Accuracy	-300	+2800	ppm	2, 10, 13
T _{PERIOD ABS}	Absolute Period (Including Jitter and Spread Spectrum)	9.847	10.203	ns	2, 6
T _{CCJITTER}	Cycle to Cycle Jitter	-	150	ps	2
V _{MAX}	Absolute Maximum Input Voltage	-	+1.15	V	1, 7
V _{MIN}	Absolute Minimum Input Voltage	-	-0.3	V	1, 8
Duty Cycle	Duty Cycle	40	60	%	2

Symbol	Parameter	100MHz Input		Units	Note
		Min	Max		
Rise-Fall Matching	Rising Edge Rate (REFCLK+) to Falling Edge Rate (REFCLK-) Matching	-	20	%	1, 14
Z _{C-DC}	Clock Source DC Impedance	40	60	Ω	1, 11

Note1: Measurement taken from single-ended waveform.

Note2: Measurement taken from differential waveform.

Note3: Measured from -150mV to +150mV on the differential waveform (derived from REFCLK+ minus REFCLK-). The signal must be monotonic through the measurement region for rise and fall time. The 300mV measurement window is centered on the differential zero crossing. See Figure 13, page 36.

Note4: Measured at crossing point where the instantaneous voltage value of the rising edge of REFCLK+ equals the falling edge of REFCLK-. See Figure 10, page 35.

Note5: Refers to the total variation from the lowest crossing point to the highest, regardless of which edge is crossing. Refers to all crossing points for this measurement. See Figure 10, page 35.

Note6: Defines as the absolute minimum or maximum instantaneous period. This includes cycle to cycle jitter, relative ppm tolerance, and spread spectrum modulation. See Figure 12, page 35.

Note7: Defined as the maximum instantaneous voltage including overshoot. See Figure 10, page 35.

Note8: Defined as the minimum instantaneous voltage including undershoot. See Figure 10, page 35.

Note9: Defined as the total variation of all crossing voltages of Rising REFCLK+ and Falling REFCLK-. This is the maximum allowed variance in VCROSS for any particular system. See Figure 10, page 35.

Note10: Refer to Section 4.3.2.1 of the PCI Express Base Specification, Revision 1.1 for information regarding ppm considerations.

Note11: System board compliance measurements must use the test load card described in Figure 16, page 37. REFCLK+ and REFCLK- are to be measured at the load capacitors CL. Single ended probes must be used for measurements requiring single ended measurements. Either single ended probes with math or differential probe can be used for differential measurements. Test load CL=2pF.

Note12: T_{STABLE} is the time the differential clock must maintain a minimum ±150mV differential voltage after rising/falling edges before it is allowed to droop back into the V_{RB} ±100mV differential range. See Figure 15, page 36.

Note13: PPM refers to parts per million and is a DC absolute period accuracy specification. 1ppm is 1/1,000,000th of 100.000000MHz exactly, or 100Hz. For 300ppm then we have an error budget of 100Hz/ppm*300ppm=30kHz. The period is to be measured with a frequency counter with measurement window set to 100ms or greater. The ±300ppm applies to systems that do not employ Spread Spectrum or that use common clock source. For systems employing Spread Spectrum there is an additional 2500ppm nominal shift in maximum period resulting from the 0.5% down spread resulting in a maximum average period specification of +2800ppm.

Note14: Matching applies to rising edge rate for REFCLK+ and falling edge rate for REFCLK-. It is measured using a ±75mV window centered on the median cross point where REFCLK+ rising meets REFCLK- falling. The median cross point is used to calculate the voltage thresholds the oscilloscope is to use for the edge rate calculations. The Rise Edge Rate of REFCLK+ should be compared to the Fall Edge Rate of REFCLK-; the maximum allowed difference should not exceed 20% of the slowest edge rate. See Figure 11, page 35.

Note15: Refer to PCI Express Card Electromechanical Specification, rev.1.1, for correct measurement environment setting of each parameter.

DRAFT

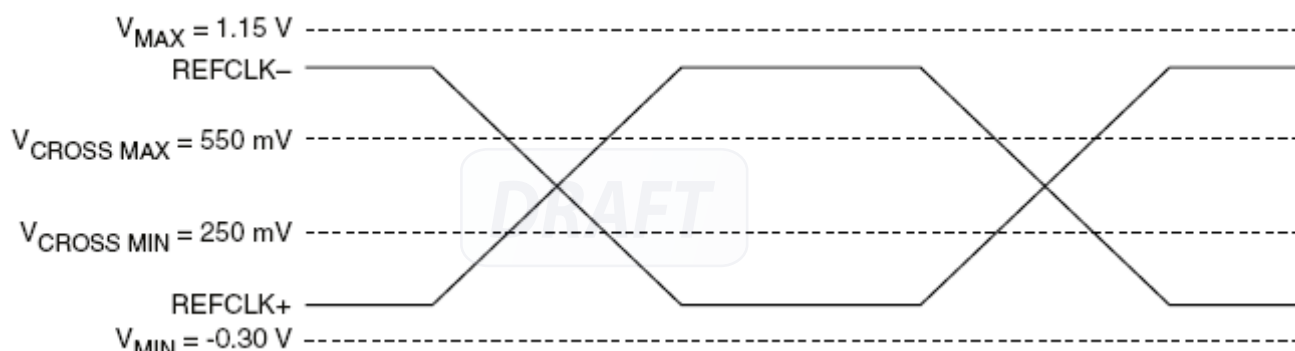


Figure 10. Single-Ended Measurement Points for Absolute Cross Point and Swing

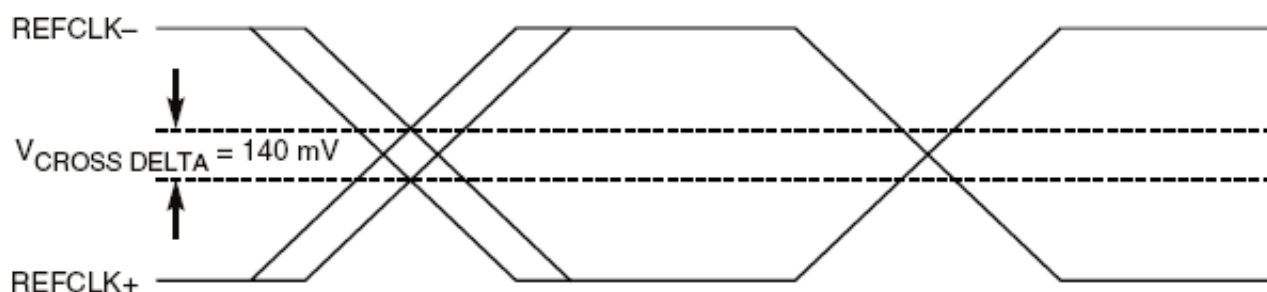


Figure 11. Single-Ended Measurement Points for Delta Cross Point

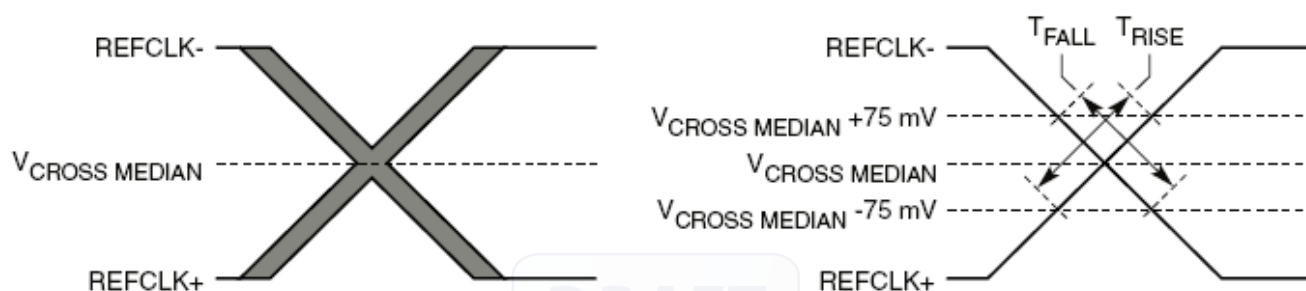


Figure 12. Single-Ended Measurement Points for Rise and Fall Time Matching

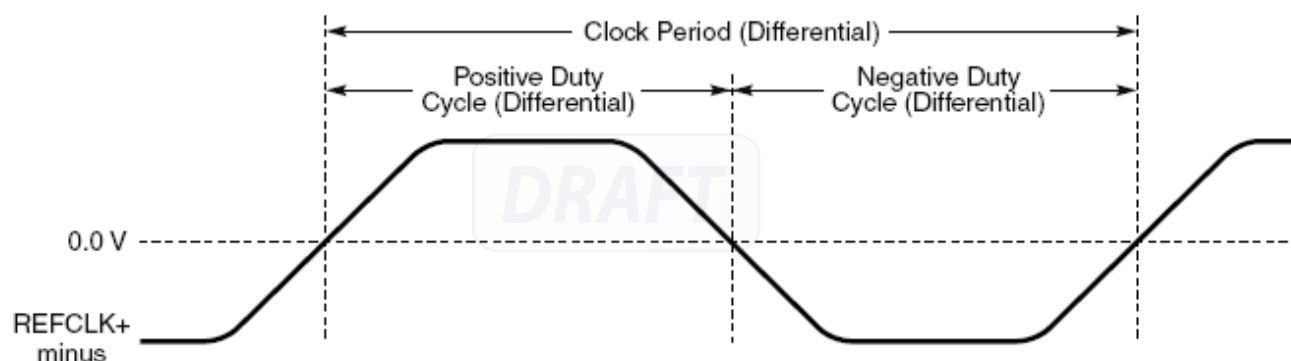


Figure 13. Differential Measurement Points for Duty Cycle and Period

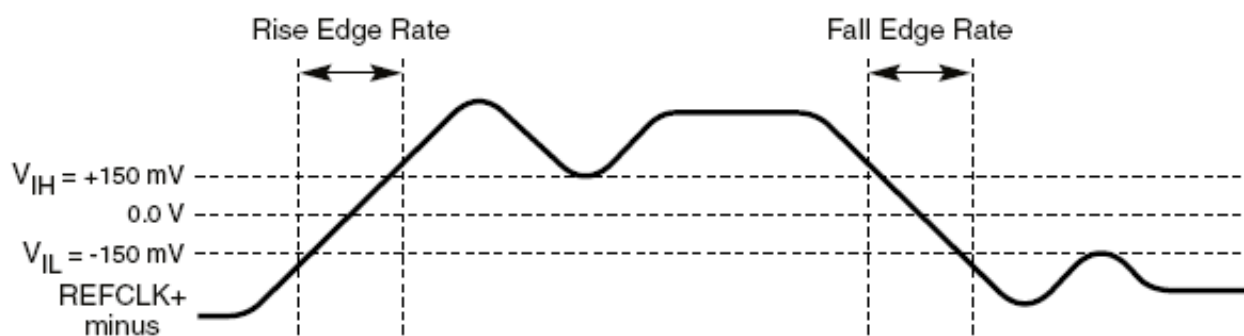


Figure 14. Differential Measurement Points for Rise and Fall Time

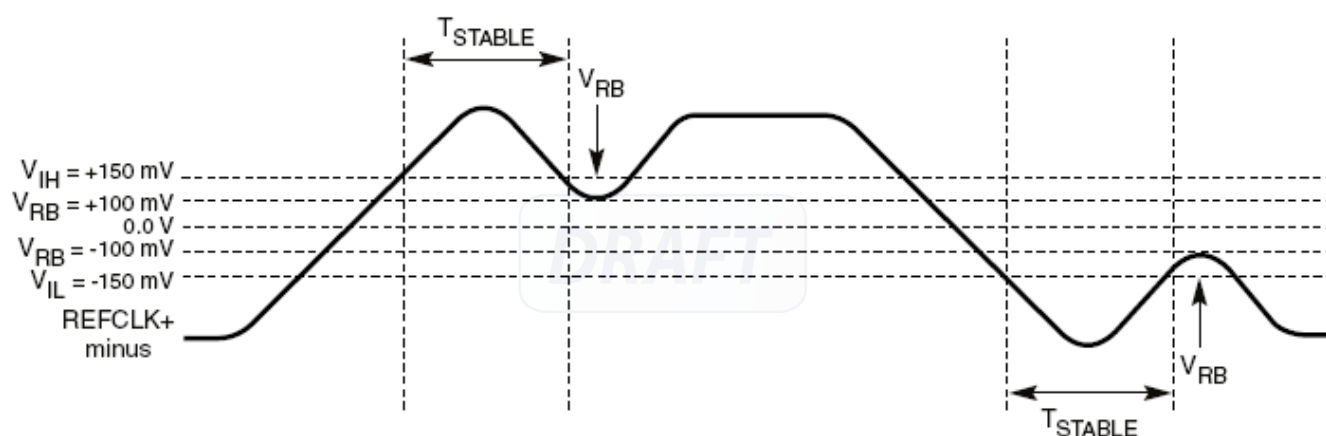


Figure 15. Differential Measurement Points for Ringback

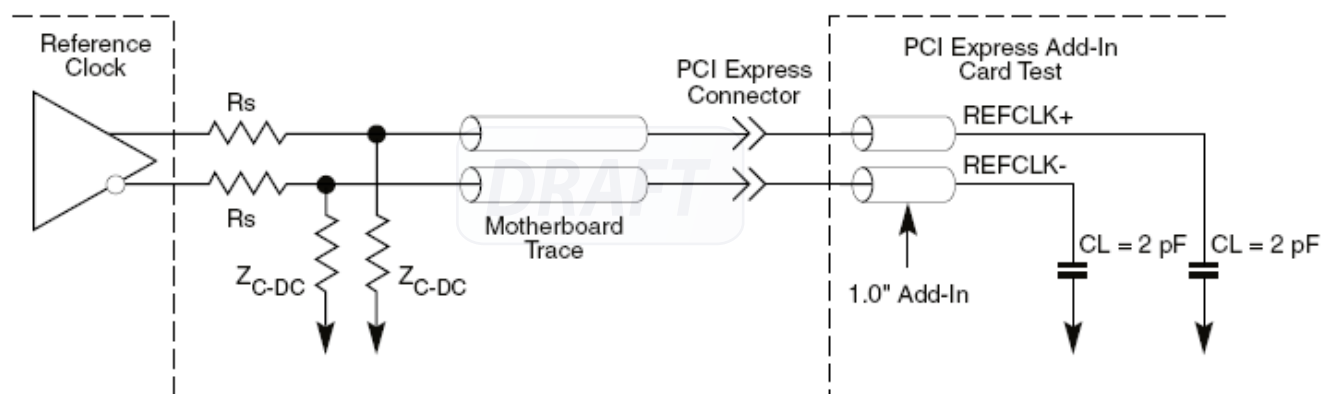


Figure 16. Reference Clock System Measurement Point and Loading

7.8.4. Auxiliary Signal Timing Parameters

Table 31. Auxiliary Signal Timing Parameters

Symbol	Parameter	Min	Max	Units
T_{PVPERL}	Power Stable to PERSTB Inactive	100	-	ms
$T_{PERST-CLK}$	REFCLK Stable Before PERSTB Inactive	100	-	μ s
T_{PERST}	PERSTB Active Time	100	-	μ s
T_{FAIL}	Power Level Invalid to PWRGD Inactive	-	500	ns
T_{WKRF}	LANWAKEB Rise – Fall Time	-	100	ns


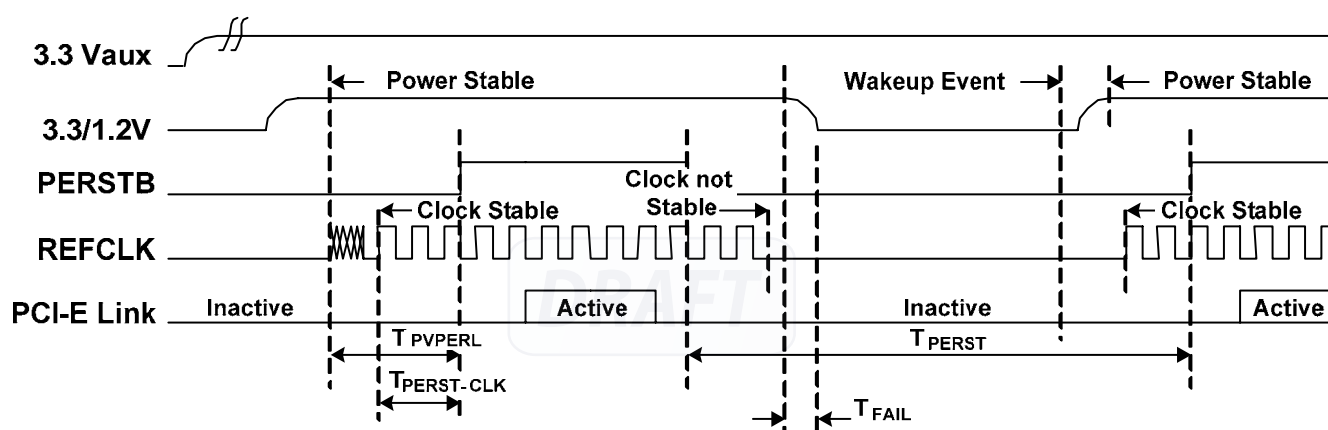


Figure 17. Auxiliary Signal Timing

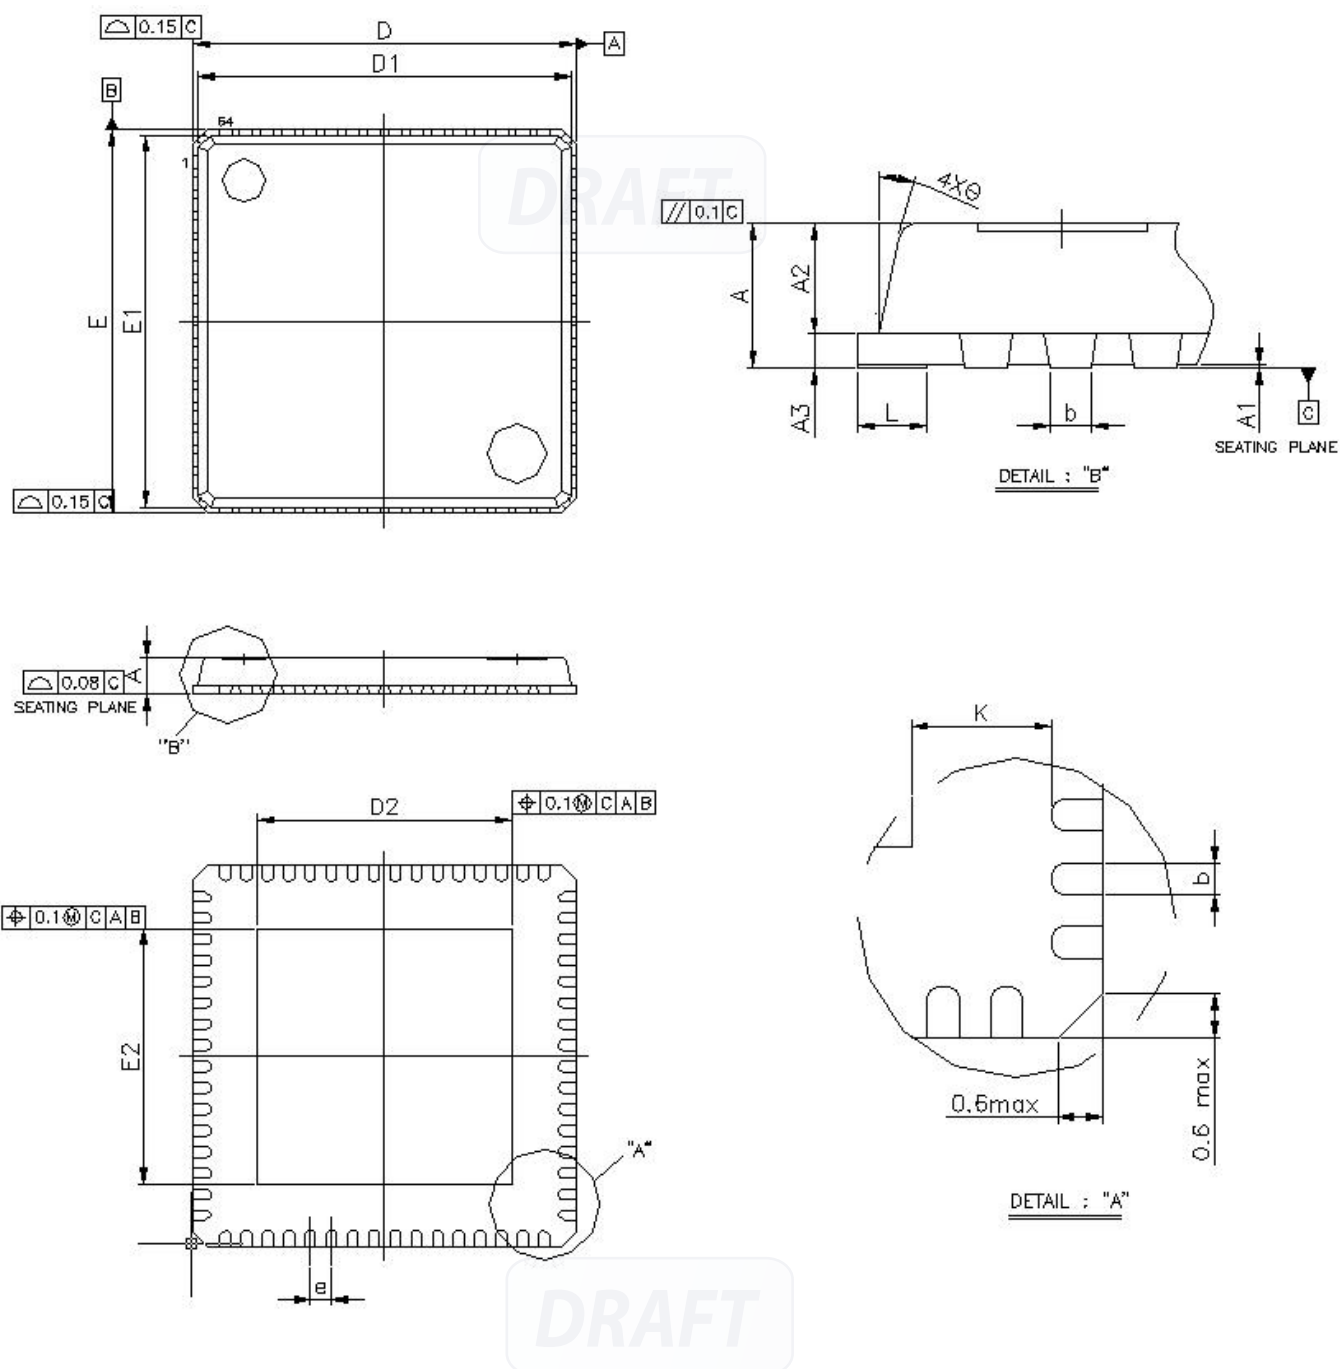

8.1. Mechanical Dimensions Notes

Symbol	Dimension in mm			Dimension in inch		
	Min	Nom	Max	Min	Nom	Max
A	0.75	0.85	1.00	0.030	0.034	0.039
A ₁	0.00	0.02	0.05	0.000	0.001	0.002
A ₂	0.55	0.65	0.80	0.022	0.026	0.032
A ₃	0.20REF			0.008 REF		
b	0.18	0.25	0.30	0.007	0.010	0.012
D/E	9.00BSC			0.354BSC		
D ₁ /E ₁	8.75BSC			0.344BSC		
D ₂ /E ₂	7.05	7.3	7.55	0.277	0.287	0.297
e	0.50BSC			0.020BSC		
L	0.30	0.40	0.50	0.012	0.016	0.020
θ	0°	-	14°	0°	-	14°

Note1: CONTROLLING DIMENSION: MILLIMETER (mm).

Note2: REFERENCE DOCUMENT: JEDEC MO-220.

DRAFT

9. Ordering Information

Table 32. Ordering Information

Part Number	Package	Status
RTL8111DP-VC-CG	64-Pin QFN 'Green' Package	Production

Note: See page 4 for package ID information.

DRAFT

DRAFT

Realtek Semiconductor Corp.**Headquarters**

No. 2, Innovation Road II
Hsinchu Science Park, Hsinchu 300, Taiwan
Tel.: +886-3-578-0211. Fax: +886-3-577-6047
www.realtek.com