



REALTEK

NOT FOR PUBLIC RELEASE

**RTL8111G
RTL8111GS**

INTEGRATED 10/100/1000M ETHERNET CONTROLLER FOR PCI EXPRESS APPLICATIONS

eFUSE DATASHEET (CONFIDENTIAL: Development Partners Only)

**Rev. 1.0
30 April 2012
Track ID: JATR-3375-16**



REALTEK

Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

www.realtek.com

COPYRIGHT

©2012 Realtek Semiconductor Corp. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realtek Semiconductor Corp.

DISCLAIMER

Realtek provides this document ‘as is’, without warranty of any kind. Realtek may make improvements and/or changes in this document or in the product described in this document at any time. This document could include technical inaccuracies or typographical errors.

TRADEMARKS

Realtek is a trademark of Realtek Semiconductor Corporation. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

LICENSE

This product is covered by one or more of the following patents: US5,307,459, US5,434,872, US5,732,094, US6,570,884, US6,115,776, and US6,327,625.

USING THIS DOCUMENT

This document is intended for the software engineer’s reference and provides detailed programming information.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide.

REVISION HISTORY

Revision	Release Date	Summary
1.0	2012/04/30	First release.

Table of Contents

1.	EFUSE DATA FORMAT	1
2.	PG TOOL EFUSE CONFIGURATION FILE CONTENTS	2
3.	EFUSE RELATED ETHERNET MAC REGISTERS.....	3
3.1.	CONFIG 1 (OFFSET 0052H, RW)	3
3.2.	CONFIG 2 (OFFSET 0053H, RW)	4
3.3.	CONFIG 3 (OFFSET 0054H, RW)	4
3.4.	CONFIG 4 (OFFSET 0055H, RW)	5
3.5.	CONFIG 5 (OFFSET 0056H, RW)	5
4.	EFUSE RELATED POWER MANAGEMENT REGISTERS	6
4.1.	PCI CONFIGURATION SPACE TABLE	6
5.	PXE PARAMETERS	10
6.	PIN ASSIGNMENTS	11
6.1.	RTL8111G PIN ASSIGNMENTS	11
6.2.	RTL8111GS PIN ASSIGNMENTS	12

List of Tables

TABLE 1.	EFUSE RELATED ETHERNET MAC REGISTERS.....	3
TABLE 2.	CONFIG 1 (OFFSET 0052H, RW).....	3
TABLE 3.	CONFIG 2 (OFFSET 0053H, RW).....	4
TABLE 4.	CONFIG 3 (OFFSET 0054H, RW).....	4
TABLE 5.	CONFIG 4 (OFFSET 0055H, RW).....	5
TABLE 6.	CONFIG 5 (OFFSET 0056H, RW).....	5
TABLE 7.	EFUSE RELATED POWER MANAGEMENT REGISTERS.....	6
TABLE 8.	PCI CONFIGURATION SPACE TABLE.....	6
TABLE 9.	PXE PARAMETERS	10

List of Figures

FIGURE 1.	EFUSE CONTENTS	1
FIGURE 2.	EFUSE DATA FORMAT	1
FIGURE 3.	RTL8111G PIN ASSIGNMENTS.....	11
FIGURE 4.	RTL8111GS PIN ASSIGNMENTS	12

1. eFUSE Data Format

Some eFUSE regions are reserved (Figure 1). We recommend not to modify reserved regions without Realtek approval.

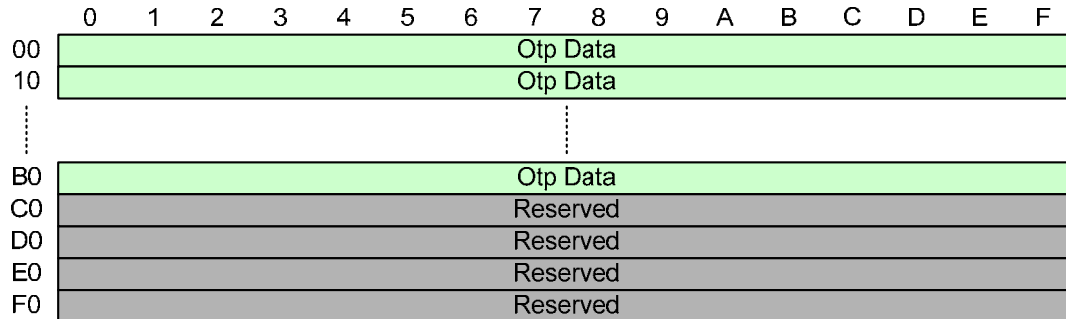


Figure 1. eFUSE Contents

To write commands in eFUSE, follow the format below:

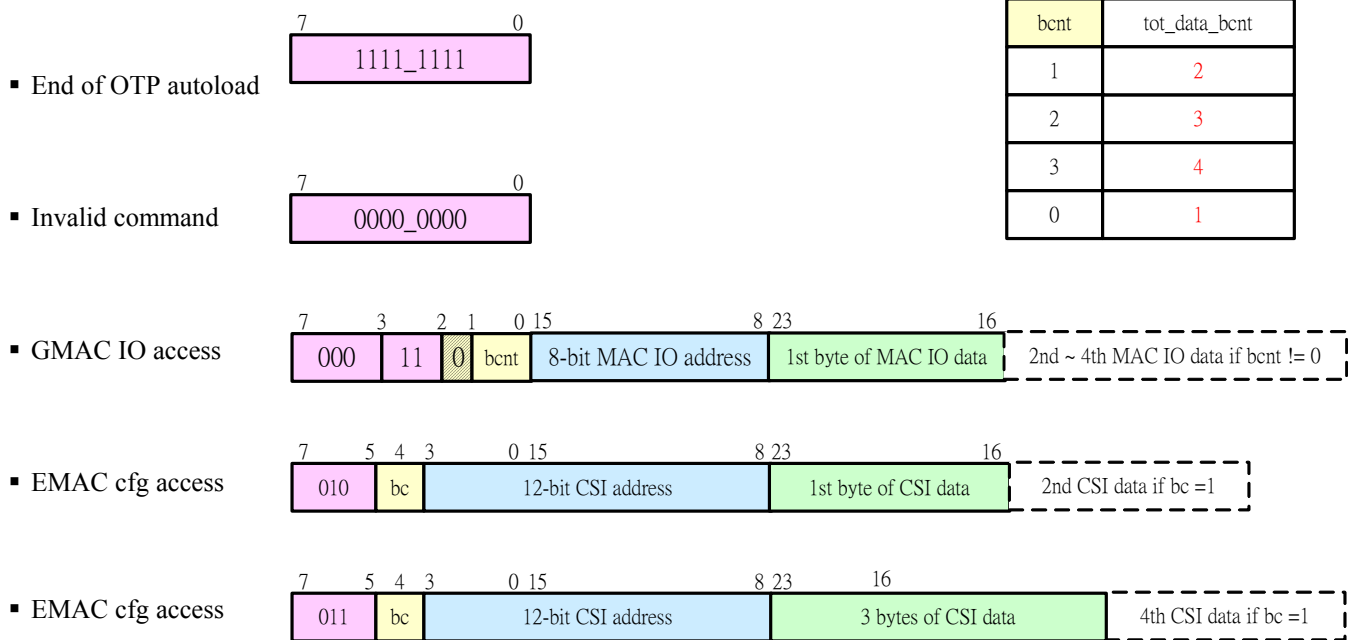


Figure 2. eFUSE Data Format

Note 1: Data fields are always low-byte-first.

Note 2: Incremental bcnt number of 'GMAC IO access' or 'EMAC cfg access' cannot overpass DW boundary.

These patterns provide the method to access EMAC and GMAC registers . For example, if we want to fill MAC IO CONFIG 1 (offset 0x52) with value 0xCF, then the data format is 0x (CF 52 18). We first write the lowest byte, 0x18, then 0x52, and 0xCF in eFUSE, thus the value will be auto-loaded to the registers.

As the eFUSE is One-Time-Programmable, to modify commands in the eFUSE, first clear all to 0.

2. PG Tool eFUSE Configuration File Contents

The RTL8111G/RTL8111GS features embedded configurable 2K-bit eFUSE One-Time-Programmable (OTP) memory. The eFUSE interface permits the RTL8111G/RTL8111GS to read from, and write data to, an internal eFUSE.

Values in the internal eFUSE allow default fields in PCI configuration space and I/O space to be overridden. Following a power-on reset or software eFUSE auto-load command, the RTL8111G/RTL8111GS will auto-load values from the eFUSE.

Note: To write commands in eFUSE, follow the format in section 1 eFUSE Data Format, page 1.

If the eFUSE auto-load is bypassed, the RTL8111G/RTL8111GS initialization uses default values for the appropriate Configuration and Operational Registers. Software can read and write to the eFUSE using ‘bit-bang’ accesses via the eFUSE Access Register.

3. eFUSE Related Ethernet MAC Registers

Table 1. eFUSE Related Ethernet MAC Registers

Offset	Name	Type	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
00h~05h	IDR0~IDR5	RW	-	-	-	-	-	-	-	-
52h	CONFIG1	R	LEDS1	LEDS0	-	Speed_down	-	-	-	-
		W	LEDS1	LEDS0	-	Speed_down	-	-	-	-
53h	CONFIG2	R	-	-	-	-	-	led_lp_en	lanwake_dly_en	-
		W	-	-	-	-	-	led_lp_en	lanwake_dly_en	-
54h	CONFIG3	R	-	VPDSel	-	LinkUp	-	Jumbo_en0	-	-
		W	-	VPDSel	-	LinkUp	-	Jumbo_en0	-	-
55h	CONFIG4	R	-	-	-	Isolate_disable_LAN	-	-	-	-
		W	-	-	-	Isolate_disable_LAN	-	-	-	-
56h	CONFIG5	R	-	BWF	MWF	UWF	-	-	LANWake	-
		W	-	BWF	MWF	UWF	-	-	LANWake	-

3.1. CONFIG 1 (Offset 0052h, RW)

Table 2. CONFIG 1 (Offset 0052h, RW)

Bit	Symbol	RW	Description
7:6	LEDS1-0	RW	Refer to the RTL8111G/RTL8111GS datasheet for a detailed LED pin description.
5	-	-	Reserved
4	Speed_down	RW	Speed Down Enable. 0: Link speed will stay at 100Mbps when the isolateb pin is low 1: Link speed changes from 100Mbps to 10Mbps when the isolateb pin is low
3	MEMMAP	R	Memory Mapping: The operational registers are mapped into PCI memory space. Always 1.
2	IOMAP	R	I/O Mapping: The operational registers are mapped into PCI I/O space. Always 1.
1	VPD	R	Vital Product Data: Set to enable Vital Product Data. Always 1.
0	PMEn	R	Power Management Enable. Always 1.

3.2. CONFIG 2 (Offset 0053h, RW)

Table 3. CONFIG 2 (Offset 0053h, RW)

Bit	Symbol	RW	Description
7:3	-	-	Reserved
2	led_lp_en	RW	LED Low Power Enable. 1: LEDs are disabled except D0 state 0: LEDs are enabled in all power management states
1	lanwake_dly_en	RW	Lanwakeb Pin Delay Enable. 1: The lanwakeb pin is pulled low after 2s when the RTL8111G/RTL8111GS receives a WOL packet. 0: The lanwakeb pin is pulled low immediately the RTL8111G/RTL8111GS receives a WOL packet.
0	-	-	Reserved

3.3. CONFIG 3 (Offset 0054h, RW)

Table 4. CONFIG 3 (Offset 0054h, RW)

Bit	Symbol	RW	Description
7	-	-	Reserved
6	VPDSel	RW	Vital Product Data Offset Select. 1'b0: VPD address start point = 40h 1'b1: VPD address start point = 00h
5	-	-	Reserved
4	LinkUp	RW	Link Up. This bit is valid when the PMEn bit of the CONFIG1 register is set. The RTL8111F, in an adequate power state, will assert the PMEB signal to wakeup the operating system when the cable connection is re-established.
3	-	-	Reserved
2	Jumbo_en0	RW	Jumbo Enable. 1: This bit sets to 1 when the RTL8111G/RTL8111GS has jumbo frames to transmit 0: If there are no jumbo frame packets to transmit, this bit sets to 0
1:0	-	-	Reserved

3.4. CONFIG 4 (Offset 0055h, RW)

Table 5. CONFIG 4 (Offset 0055h, RW)

Bit	Symbol	RW	Description
7:5	-	-	Reserved
4	Isolate_disable_LAN	RW	1: Enable (IsolateB is set low to disable LAN) 0: Disable (IsolateB is set low and DOES NOT disable LAN)
3:0	-	-	Reserved

3.5. CONFIG 5 (Offset 0056h, RW)

Table 6. CONFIG 5 (Offset 0056h, RW)

Bit	Symbol	RW	Description
7	-	-	Reserved
6	BWF	RW	Broadcast Wakeup Frame. 1: Enable Broadcast Wakeup Frame with mask bytes of only DID field = FF FF FF FF FF FF. 0: Default value. Disable Broadcast Wakeup Frame with mask bytes of only the DID field = FF FF FF FF FF FF. The power-on default value of this bit is 0.
5	MWF	RW	Multicast Wakeup Frame. 1: Enable Multicast Wakeup Frame with mask bytes of only the DID field, which is a multicast address. 0: Default value. Disable Multicast Wakeup Frame with mask bytes of only the DID field, which is a multicast address. The power-on default value of this bit is 0.
4	UWF	RW	Unicast Wakeup Frame. 1: Enable Unicast Wakeup Frame with mask bytes of only the DID field, which is its own physical address. 0: Default value. Disable Unicast Wakeup Frame with mask bytes of only the DID field, which is its own physical address. The power-on default value of this bit is 0.
3:2	-	-	Reserved
1	LANWake	RW	LANWake Signal Enable/Disable. 1: Enable LANWake signal 0: Disable LANWake signal
0	-	-	Reserved

4. eFUSE Related Power Management Registers

Table 7. eFUSE Related Power Management Registers

Configuration Space Offset	Name	Type	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
42h	PMC	R	Aux_I_b1	Aux_I_b0	DSI	Reserved	PMECLK	Version		
43h		R	PME_D3 _{cold}	PME_D3 _{hot}	PME_D2	PME_D1	PME_D0	D2	D1	Aux_I_b2

4.1. PCI Configuration Space Table

Table 8. PCI Configuration Space Table

No.	Name	Type	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
00h	VID	R	VID7	VID6	VID5	VID4	VID3	VID2	VID1	VID0
01h		R	VID15	VID14	VID13	VID12	VID11	VID10	VID9	VID8
02h	DID	R	DID7	DID6	DID5	DID4	DID3	DID2	DID1	DID0
03h		R	DID15	DID14	DID13	DID12	DID11	DID10	DID9	DID8
04h	Command	R	0	PERRSP	0	0	0	BMEN	MEMEN	IOEN
		W	-	PERRSP	-	-	-	BMEN	MEMEN	IOEN
05h		R	0	0	0	0	0	IntDisable	0	SERREN
		W	-	-	-	-	-	IntDisable	-	SERREN
06h	Status	R	0	0	0	1	IntSt	0	0	0
07h		R	DPERR	SSERR	RMABT	RTABT	STABT	0	0	DPD
		W	DPERR	SSERR	RMABT	RTABT	STABT	-	-	DPD
08h	Revision ID	R	0	0	0	0	0	0	1	1
09h	PIFR	R	0	0	0	0	0	0	0	0
0Ah	SCR	R	0	0	0	0	0	0	0	0
0Bh	BCR	R	0	0	0	0	0	0	1	0
0Ch	CLS	RW	CLS7	CLS6	CLS5	CLS4	CLS3	CLS2	CLS1	CLS0
0Dh	LTR	R	0	0	0	0	0	0	0	0
0Eh	HTR	R	0	0	0	0	0	0	0	0
0Fh	BIST	R	0	0	0	0	0	0	0	0
10h	IOAR	R	0	0	0	0	0	0	0	IOIN
		W	-	-	-	-	-	-	-	-
11h		RW	IOAR15	IOAR14	IOAR13	IOAR12	IOAR11	IOAR10	IOAR9	IOAR8
12h		RW	IOAR23	IOAR22	IOAR21	IOAR20	IOAR19	IOAR18	IOAR17	IOAR16
13h		RW	IOAR31	IOAR30	IOAR29	IOAR28	IOAR27	IOAR26	IOAR25	IOAR24
14h~17h	Reserved									
18h	MEM 64 BAR	R	MEM7	0	0	0	MEMPF	MEMLOC	MEMLOC	MEMIN
19h		RW	MEM15	MEM14	MEM13	MEM12	MEM11	MEM10	MEM9	MEM8
1Ah		RW	MEM23	MEM22	MEM21	MEM20	MEM19	MEM18	MEM17	MEM16
1Bh		RW	MEM31	MEM30	MEM29	MEM28	MEM27	MEM26	MEM25	MEM24
1Ch		RW	MEM39	MEM38	MEM37	MEM36	MEM35	MEM34	MEM33	MEM32
1Dh		RW	MEM47	MEM46	MEM45	MEM44	MEM43	MEM42	MEM41	MEM40
1Eh		RW	MEM55	MEM54	MEM53	MEM52	MEM51	MEM50	MEM49	MEM48
1Fh		RW	MEM63	MEM62	MEM61	MEM60	MEM59	MEM58	MEM57	MEM56
20h~27h	Reserved									

No.	Name	Type	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
28h~2Bh	CISPtr	CardBus CIS Pointer								
2Ch	SVID	R	SVID7	SVID6	SVID5	SVID4	SVID3	SVID2	SVID1	SVID0
2Dh		R	SVID15	SVID14	SVID13	SVID12	SVID11	SVID10	SVID9	SVID8
2Eh	SMID	R	SMID7	SMID6	SMID5	SMID4	SMID3	SMID2	SMID1	SMID0
2Fh		R	SMID15	SMID14	SMID13	SMID12	SMID11	SMID10	SMID9	SMID8
30h	BMAR	R	0	0	0	0	0	0	0	BROMEN
		W	-	-	-	-	-	-	-	BROMEN
31h		R	BMAR15	BMAR14	BMAR13	BMAR12	BMAR11	0	0	0
		W	BMAR15	BMAR14	BMAR13	BMAR12	BMAR11	-	-	-
32h		RW	BMAR23	BMAR22	BMAR21	BMAR20	BMAR19	BMAR18	BMAR17	BMAR16
33h		RW	BMAR31	BMAR30	BMAR29	BMAR28	BMAR27	BMAR26	BMAR25	BMAR24
34h	Cap_Ptr	R	0	1	0	0	0	0	0	0
35h~3Bh	Reserved									
3Ch	ILR	RW	ILR7	ILR6	ILR5	ILR4	ILR3	ILR2	ILR1	ILR0
3Dh	IPR	R	0	0	0	0	0	0	0	1
3Eh	MNGNT	R	0	0	0	0	0	0	0	0
3Fh	MXLAT	R	0	0	0	0	0	0	0	0
40h	PMID	R	0	0	0	0	0	0	0	1
41h	NextPtr	R	0	1	0	1	0	0	0	0
42h	PMC	R	Aux_I_b1	Aux_I_b0	DSI	Reserved	PMECLK	Version		
43h		R	PME_D3 _{cold}	PME_D3 _{hot}	PME_D2	PME_D1	PME_D0	D2	D1	Aux_I_b2
44h	PMCSR	R	0	0	0	0	0	0	Power State	
		W	-	-	-	-	-	-	Power State	
45h		R	PME_Status	-	-	-	-	-	-	PME_En
		W	PME_Status	-	-	-	-	-	-	PME_En
46~4Fh	Reserved									
50h	MSIID	R	0	0	0	0	0	1	0	1
51h	NextPtr	R	0	1	1	1	0	0	0	0
52h	Message Control	R	64-bit Address Capable	Multiple Message Enable			0	0	0	MSI Enable
		W	-	Multiple Message Enable			-	-	0	MSI Enable
53h		Reserved. Always returns 0								
54h~57h	Message Address Low	RW	64-bit Interrupt Message Address Low							
58h~5Bh	Message Address High	RW	64-bit Interrupt Message Address High							
5Ch~5Dh	Message Data	RW	16-bit Message Data							
5E~6Fh	Reserved									
70h	PCIEID	R	0	0	0	1	0	0	0	0
71h	NextPtr	R	1	0	1	0	1	1	0	0
72h~73h	PCIE Cap.	R	0	0	0	0	0	0	1	0
		R	0	0	0	0	0	0	1	0
74h~77h	Device Capability Register	R	L0s_acpt_latency[1]	L0s_acpt_latency[0]	Entend_tag_support	0	0	Max_payload_size_support		
		R	Role Base Error rpt	0	0	0	L1_acpt_latency[2]	L1_acpt_latency[1]	L1_acpt_latency[0]	L0s_acpt_latency[2]
		R	0	0	0	0	0	0	0	0
		R	0	0	0	0	0	0	0	0

No.	Name	Type	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
78h~79h	Device Control Register	RW	Max_payload_size			Relaxed_ordering_en	Unsupport_rqst_rpt_en	Fatal_err_rpt_en	Non_fatal_err_rpt_en	Correctable_err_rpt_en
		RW	0	Max_read_request_size			No_snoop_en	Auxpwr_PM_en	0	Extend_tag_en
7Ah	Device Status Register	R	0	0	Transaction_pending	AuxPwr_det	Upsupport_rqst_det	Fatal_err_det	Non_fatal_err_det	Correct-able_err_det
		W	0	0	-	-	Upsupport_rqst_det	Fatal_err_det	Non_fatal_err_det	Correct-able_err_det
7Bh	Link Capability Register	R	0	0	0	0	0	0	0	0
7Ch		R	0	0	0	1	0	0	0	1
7Dh		R	L1_exit_lat[0]	L0s_exit_lat[2]	L0s_exit_lat[1]	L0s_exit_lat[0]	ASPM_support		0	0
7Eh		R	0	0	0	0	0	Clock_PM	L1_exit_lat[2]	L1_exit_lat[1]0
7Fh	Link Control Register	R	0	0	0	0	0	0	0	0
80h		R	Extended_sync	Common_clock	0	0	RCB	0	ASPM_control	
		W	Extended_sync	Common_clock	0	0	RCB	0	ASPM_control	
81h		R	0	0	0	0	0	0	0	0
	W	0	0	0	0	0	0	0	0	Enable_clock_PM
82h	Link Status Register	R	0	0	0	1	0	0	0	1
83h		R	0	0	0	Slot_clock_cfg	0	0	0	0
84h	Slot Capability Register	R	Slot Power Limit[0]	Hot-Plug Capable	Hot-Plug Surprise	Power Indicator Present	Attn Indicator Present	MRL Sensor Present	Power Control Present	Attn Bottom Present
85h		R	Slot Power Limit Scale[0]	Slot Power Limit[7]	Slot Power Limit[6]	Slot Power Limit[5]	Slot Power Limit[4]	Slot Power Limit[3]	Slot Power Limit[2]	Slot Power Limit[1]
86h		R	Physical Slot Number[4]	Physical Slot Number[3]	Physical Slot Number[2]	Physical Slot Number[1]	Physical Slot Number[0]	No Common Complete Support	Electromechanical Interlock Present	Slot Power Limit Scale[1]
87h		R	Physical Slot Number[12]	Physical Slot Number[11]	Physical Slot Number[10]	Physical Slot Number[9]	Physical Slot Number[8]	Physical Slot Number[7]	Physical Slot Number[6]	Physical Slot Number[5]
88h	Slot Control Register	RW	Attn Indicator Control[1]	Attn Indicator Control[0]	Hot-Plug Interrupt Enable	Command Completed Interrupt Enable	Presence Detect Changed Enable	MRL Sensor Changed Enable	Power Fault Detected Enable	Attn Button Pressed Enable
89h		RW	-	-	-	Data Link Layer State Changed Enable	Electro-mechanical Interlock Control	Power Controller Control	Power Indicator Control[1]	Power Indicator Control[0]
8Ah	Slot Status Register	R	Electro-mechanical Interlock Status	Presence Detect State	MRL Sensor State	Command Completed	Presence Detect Changed	MRL Sensor Changed	Power Fault Detected	Attn Button Pressed
8Bh		R	Reserved							
8Ch~94h	Reserved									
95h	LTR and OBFF Capabilities	R	0	0	0	0	LTR Mechanism Supported	0	0	0
96h		R	0	0	0	0	OBFF supported		0	0

No.	Name	Type	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
97h~98h	Reserved									
99h	LTR and OBFF Control Registers	RW	0	OBFF Enabled		0	0	LTR Mechanism Enabled	0	0
9Ah~AFh	Reserved									
ACh	MSI-X ID	R	0	0	0	1	0	0	0	1
ADh	NextPtr	R	1	1	0	0	1	1	0	0
AEh		R	MSI-X Table_Size[7]	MSI-X Table_Size[6]	MSI-X Table_Size[5]	MSI-X Table_Size[4]	MSI-X Table_Size[3]	MSI-X Table_Size[2]	MSI-X Table_Size[1]	MSI-X Table_Size[0]
AFh		R	MSI-X Enable	Function Mask	Reserved			MSI-X Table_Size[10]	MSI-X Table_Size[9]	MSI-X Table_Size[8]
B0h	MSI-X Table Offset and BIR Register	R	Table Offset[4]	Table Offset[3]	Table Offset[2]	Table Offset[1]	Table Offset[0]	BIR[2]	BIR[1]	BIR[0]
B1h		R	Table Offset[12]	Table Offset[11]	Table Offset[10]	Table Offset[9]	Table Offset[8]	Table Offset[7]	Table Offset[6]	Table Offset[5]
B2h		R	Table Offset[20]	Table Offset[19]	Table Offset[18]	Table Offset[17]	Table Offset[16]	Table Offset[15]	Table Offset[14]	Table Offset[13]
B3h		R	Table Offset[28]	Table Offset[27]	Table Offset[26]	Table Offset[25]	Table Offset[24]	Table Offset[23]	Table Offset[22]	Table Offset[21]
B4h	MSI-X PBA Offset and BIR	R	PBA Table Offset[4]	PBA Table Offset[3]	PBA Table Offset[2]	PBA Table Offset[1]	PBA Table Offset[0]	PBA BIR[2]	PBA BIR[1]	PBA BIR[0]
B5h		R	PBA Table Offset[12]	PBA Table Offset[11]	PBA Table Offset[10]	PBA Table Offset[9]	PBA Table Offset[8]	PBA Table Offset[7]	PBA Table Offset[6]	PBA Table Offset[5]
B6h		R	PBA Table Offset[20]	PBA Table Offset[19]	PBA Table Offset[18]	PBA Table Offset[17]	PBA Table Offset[16]	PBA Table Offset[15]	PBA Table Offset[14]	PBA Table Offset[13]
B7h		R	PBA Table Offset[28]	PBA Table Offset[27]	PBA Table Offset[26]	PBA Table Offset[25]	PBA Table Offset[24]	PBA Table Offset[23]	PBA Table Offset[22]	PBA Table Offset[21]
B8h~CBh	Reserved									
CCh	VPDID	R	0	0	0	0	0	0	1	1
CDh	NextPTR	R	0	0	0	0	0	0	0	0
CEh	Flag VPD Address	RW	VPD ARRD7	VPD ARRD6	VPD ARRD5	VPD ARRD4	VPD ARRD3	VPD ARRD2	VPD ARRD1	VPD ARRD0
CFh		RW	Flag	VPD ARRD14	VPD ARRD13	VPD ARRD12	VPD ARRD11	VPD ARRD10	VPD ARRD9	VPD ARRD8
D0h	VPD Data	RW	VPD Data7	VPD Data6	VPD Data5	VPD Data4	VPD Data3	VPD Data2	VPD Data1	VPD Data0
D1h		RW	VPD Data15	VPD Data14	VPD Data13	VPD Data12	VPD Data11	VPD Data10	VPD Data9	VPD Data8
D2h		RW	VPD Data23	VPD Data22	VPD Data21	VPD Data20	VPD Data19	VPD Data18	VPD Data17	VPD Data16
D3h		RW	VPD Data31	VPD Data30	VPD Data29	VPD Data28	VPD Data27	VPD Data26	VPD Data25	VPD Data24
D4h~FFh	Reserved									

5. PXE Parameters

Table 9. PXE Parameters

Bit	Symbol	RW	Description
7:6	Boot Protocol	RW	00: PXE protocol 01: RPL protocol
5:4	Boot Order	RW	00: ROM disable 01: Int 18h 10: Int 19h 11: PnP/BEV (BBS)
3	Show Config Message	RW	0: Enable 1: Disable
2	Shift+F10 Menu Entry	RW	0: Enable 1: Disable
1:0	Show Config Time	RW	00: 3 seconds 01: 5 seconds 10: 1 second 11: 0 seconds

6. Pin Assignments

6.1. RTL8111G Pin Assignments

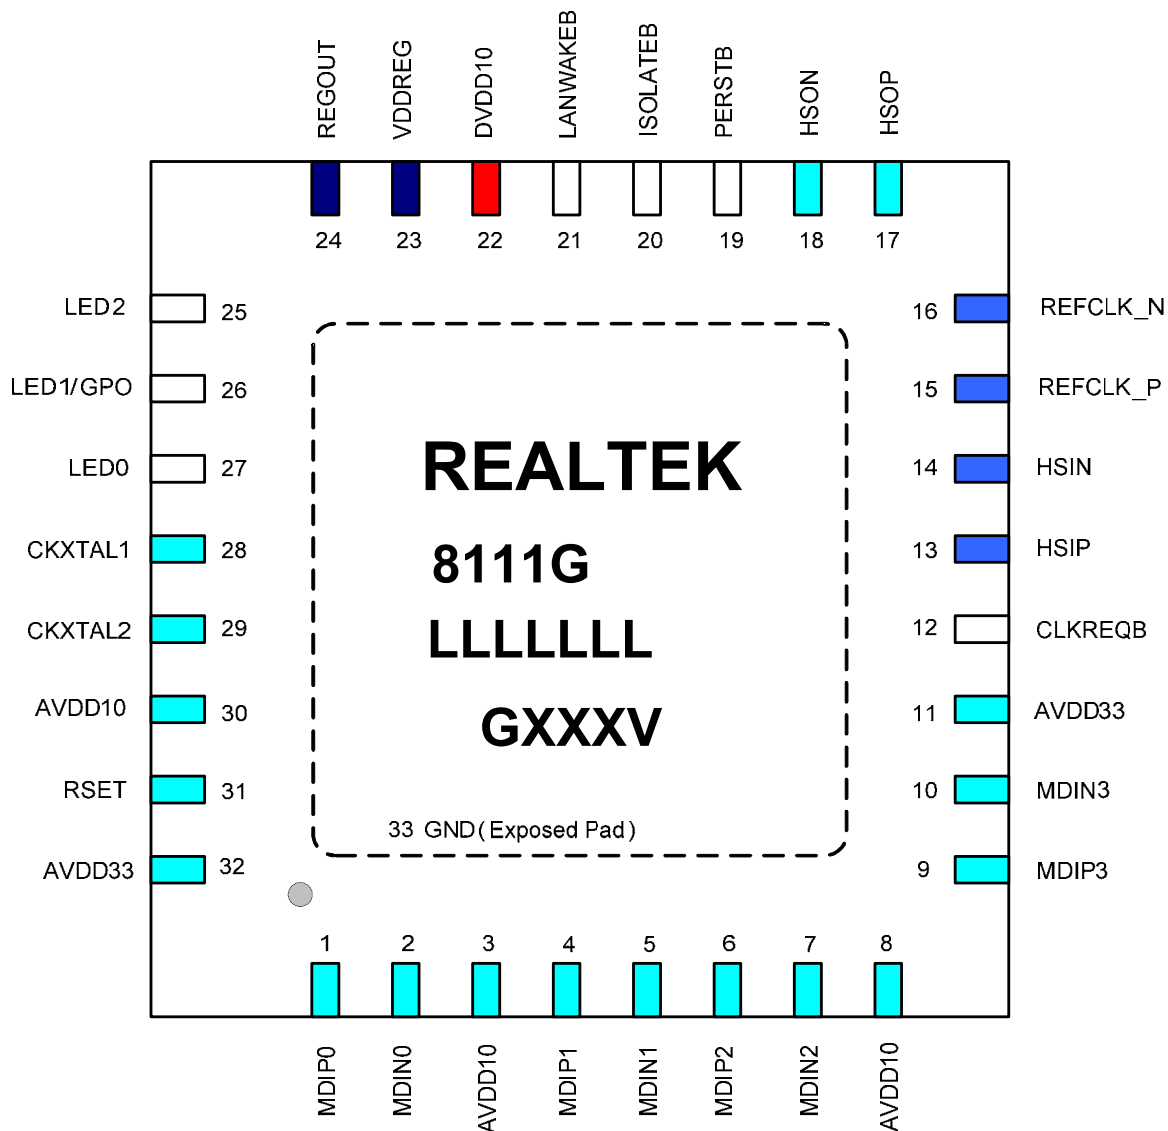


Figure 3. RTL8111G Pin Assignments

6.2. RTL8111GS Pin Assignments

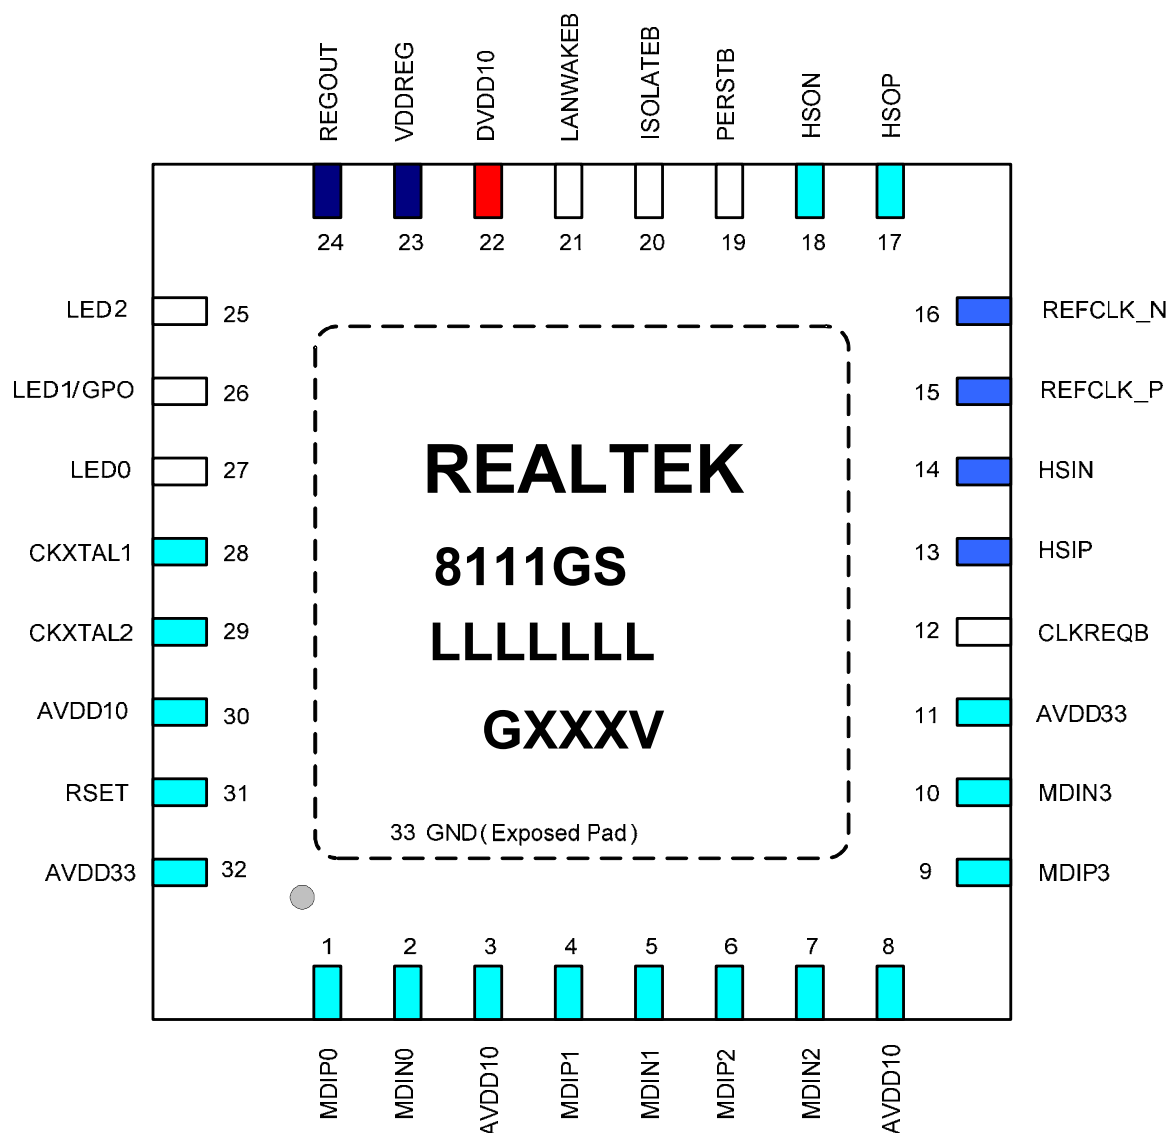


Figure 4. RTL8111GS Pin Assignments

Realtek Semiconductor Corp.

Headquarters

No. 2, Innovation Road II

Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

www.realtek.com