

REALTEK

NOT FOR PUBLIC RELEASE

RTL8402-CG

INTEGRATED 10/100M ETHERNET CONTROLLER & 1-LUN CARD READER CONTROLLER FOR PCI EXPRESS APPLICATIONS

DATASHEET

(CONFIDENTIAL: Development Partners Only)

Rev. 1.1

30 August 2011

Track ID: JATR-2265-11



Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

www.realtek.com

COPYRIGHT

©2011 Realtek Semiconductor Corp. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realtek Semiconductor Corp.

DISCLAIMER

Realtek provides this document ‘as is’, without warranty of any kind. Realtek may make improvements and/or changes in this document or in the product described in this document at any time. This document could include technical inaccuracies or typographical errors.

TRADEMARKS

Realtek is a trademark of Realtek Semiconductor Corporation. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

LICENSE

This product is covered by one or more of the following patents: US5,307,459, US5,434,872, US5,732,094, US6,570,884, US6,115,776, and US6,327,625.

USING THIS DOCUMENT

This document is intended for the software engineer’s reference and provides detailed programming information.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide.

REVISION HISTORY

Revision	Release Date	Summary
1.0	2011/06/17	First Release.
1.1	2011/08/30	Revised Table 10 Power and Ground, page 7. Revised section 6.2.5 Customizable LED Configuration, page 11. Added section 6.2.6 LED Blinking Frequency Control, page 13. Added section 6.11 XTAL-Less Wake-On-LAN, page 20. Revised section 7 LDO Regulator, page 21. Revised Table 21 Oscillator Requirements, page 23. Revised Table 23 DC Characteristics, page 24. Revised section 8.8.4 Auxiliary Signal Timing Parameters, page 32. Revised section 9.1 Mechanical Dimensions Notes, page 33.

Table of Contents

1. GENERAL DESCRIPTION.....	1
2. FEATURES.....	3
3. SYSTEM APPLICATIONS.....	3
4. PIN ASSIGNMENTS	4
4.1. PACKAGE IDENTIFICATION.....	4
5. PIN DESCRIPTIONS.....	5
5.1. POWER MANAGEMENT/ISOLATION	5
5.2. PCI EXPRESS INTERFACE	5
5.3. EEPROM (TWSI)	5
5.4. TRANSCEIVER INTERFACE.....	6
5.5. CLOCK	6
5.6. REFERENCE	6
5.7. LEDs	6
5.8. CARD READER	7
5.9. GPO PIN	7
5.10. POWER AND GROUND	7
6. FUNCTIONAL DESCRIPTION.....	8
6.1. PCI EXPRESS BUS INTERFACE.....	8
6.1.1. PCI Express Transmitter	8
6.1.2. PCI Express Receiver	8
6.2. LED FUNCTIONS.....	9
6.2.1. Link Monitor.....	9
6.2.2. RX LED	9
6.2.3. TX LED.....	10
6.2.4. TX/RX LED.....	10
6.2.5. Customizable LED Configuration	11
6.2.6. LED Blinking Frequency Control.....	13
6.3. PHY TRANSCEIVER	14
6.3.1. PHY Transmitter.....	14
6.3.2. PHY Receiver	14
6.3.3. Link Down Power Saving Mode.....	14
6.4. EEPROM INTERFACE	15
6.5. POWER MANAGEMENT.....	15
6.6. VITAL PRODUCT DATA (VPD).....	18
6.7. RECEIVE-SIDE SCALING (RSS)	18
6.7.1. Receive-Side Scaling (RSS) Initialization	18
6.7.2. Protocol Offload.....	19
6.7.3. RSS Operation	19
6.8. ENERGY EFFICIENT ETHERNET (EEE).....	20
6.9. PHY DISABLE MODE	20
6.10. LAN DISABLE MODE.....	20
6.11. XTAL-LESS WAKE-ON-LAN.....	20
7. LDO REGULATOR.....	21
8. CHARACTERISTICS.....	22
8.1. ABSOLUTE MAXIMUM RATINGS	22
8.2. RECOMMENDED OPERATING CONDITIONS	22

8.3.	CRYSTAL REQUIREMENTS.....	23
8.4.	OSCILLATOR REQUIREMENTS	23
8.5.	ENVIRONMENTAL CHARACTERISTICS	23
8.6.	DC CHARACTERISTICS.....	24
8.7.	AC CHARACTERISTICS.....	25
8.7.1.	<i>Serial EEPROM Interface Timing</i>	25
8.8.	PCI EXPRESS BUS PARAMETERS.....	27
8.8.1.	<i>Differential Transmitter Parameters</i>	27
8.8.2.	<i>Differential Receiver Parameters</i>	28
8.8.3.	<i>REFCLK Parameters</i>	28
8.8.4.	<i>Auxiliary Signal Timing Parameters</i>	32
9.	MECHANICAL DIMENSIONS	33
9.1.	MECHANICAL DIMENSIONS NOTES	33
10.	ORDERING INFORMATION	34

List of Tables

TABLE 1.	POWER MANAGEMENT/ISOLATION	5
TABLE 2.	PCI EXPRESS INTERFACE.....	5
TABLE 3.	EEPROM (TWSI)	5
TABLE 4.	TRANSCEIVER INTERFACE	6
TABLE 5.	CLOCK	6
TABLE 6.	REFERENCE.....	6
TABLE 7.	LEDs	6
TABLE 8.	CARD READER	7
TABLE 9.	GPO PIN	7
TABLE 10.	POWER AND GROUND	7
TABLE 11.	LED SELECT (IO REGISTER OFFSET 18H~19H).....	11
TABLE 12.	CUSTOMIZED LEDs	11
TABLE 13.	LED FEATURE CONTROL-1	12
TABLE 14.	LED FEATURE CONTROL-2.....	12
TABLE 15.	LED OPTION 1 & OPTION 2 SETTINGS	12
TABLE 16.	LED BLINKING FREQUENCY CONTROL (IO OFFSET 1AH)	13
TABLE 17.	TWSI EEPROM INTERFACE.....	15
TABLE 18.	ABSOLUTE MAXIMUM RATINGS	22
TABLE 19.	RECOMMENDED OPERATING CONDITIONS	22
TABLE 20.	CRYSTAL REQUIREMENTS.....	23
TABLE 21.	OSCILLATOR REQUIREMENTS	23
TABLE 22.	ENVIRONMENTAL CHARACTERISTICS	23
TABLE 23.	DC CHARACTERISTICS.....	24
TABLE 24.	EEPROM ACCESS TIMING PARAMETERS	26
TABLE 25.	DIFFERENTIAL TRANSMITTER PARAMETERS	27
TABLE 26.	DIFFERENTIAL RECEIVER PARAMETERS.....	28
TABLE 27.	REFCLK PARAMETERS	28
TABLE 28.	AUXILIARY SIGNAL TIMING PARAMETERS.....	32
TABLE 29.	ORDERING INFORMATION	34

List of Figures

FIGURE 1.	PIN ASSIGNMENTS	4
FIGURE 2.	RX LED	9
FIGURE 3.	TX LED	10
FIGURE 4.	TX/RX LED.....	10
FIGURE 5.	LED BLINKING FREQUENCY EXAMPLE	13
FIGURE 6.	SERIAL EEPROM INTERFACE TIMING-1	25
FIGURE 7.	SERIAL EEPROM INTERFACE TIMING-2	25
FIGURE 8.	SERIAL EEPROM INTERFACE TIMING-3	26
FIGURE 9.	SERIAL EEPROM INTERFACE TIMING-4	26
FIGURE 10.	SINGLE-ENDED MEASUREMENT POINTS FOR ABSOLUTE CROSS POINT AND SWING	30
FIGURE 11.	SINGLE-ENDED MEASUREMENT POINTS FOR DELTA CROSS POINT	30
FIGURE 12.	SINGLE-ENDED MEASUREMENT POINTS FOR RISE AND FALL TIME MATCHING	30
FIGURE 13.	DIFFERENTIAL MEASUREMENT POINTS FOR DUTY CYCLE AND PERIOD	31
FIGURE 14.	DIFFERENTIAL MEASUREMENT POINTS FOR RISE AND FALL TIME	31
FIGURE 15.	DIFFERENTIAL MEASUREMENT POINTS FOR RINGBACK.....	31
FIGURE 16.	REFERENCE CLOCK SYSTEM MEASUREMENT POINT AND LOADING	32
FIGURE 17.	AUXILIARY SIGNAL TIMING.....	32

1. General Description

The Realtek RTL8402-CG 10/100M Ethernet controller combines a 10/100M IEEE 802.3 compliant Media Access Controller (MAC) with a 10/100M Ethernet transceiver, PCI Express bus controller, and embedded One-Time-Programmable (OTP) memory. With state-of-the-art DSP technology and mixed-mode signal technology, the RTL8402 offers high-speed transmission over CAT 5 UTP cable or CAT 3 UTP (10Mbps only) cable. Functions such as Crossover Detection & Auto-Correction, polarity correction, adaptive equalization, and timing recovery are implemented to provide robust transmission and reception capability at high speeds.

The RTL8402 supports the PCI Express 1.1 bus interface for host communications with power management, and is compliant with the IEEE 802.3u specification for 10/100Mbps Ethernet. It also features a built-in PCI Express 1.1 compliant card reader controller; integrating a PCI Express Transceiver, LDO regulator, and memory card access units into a single ship.

The RTL8402 supports Memory Stick, Memory Stick Pro, Memory Stick PRO-HG Duo, Secure Digital, Secure Digital eXtended Capacity, Multi-Media Card, and xD-Picture Card in a 1-LUN (Logical Unit Number) configuration (which means only one of these memory cards can be inserted into the RTL8402 system at one time). The device also supports an auxiliary power auto-detect function, and will auto-configure related bits of the PCI power management registers in PCI configuration space. The RTL8402 features embedded One-Time-Programmable (OTP) memory to replace the external EEPROM (TWSI).

Advanced Configuration Power management Interface (ACPI)—power management for modern operating systems that are capable of Operating System-directed Power Management (OSPM)—is supported to achieve the most efficient power management possible. PCI MSI (Message Signaled Interrupt) and MSI-X are also supported.

In addition to the ACPI feature, remote wakeup (including AMD Magic Packet and Microsoft Wakeup frame) is supported in both ACPI and APM (Advanced Power Management) environments. To support WOL from a deep power down state (e.g., D3cold, i.e., main power is off and only auxiliary exists), the auxiliary power source must be able to provide the needed power for the RTL8402.

The RTL8402 supports Protocol offload. It offloads some of the most common protocols to NIC hardware in order to prevent spurious wake up and further reduce power consumption. The RTL8402 can offload ARP (IPv4) and NS (IPv6) protocols while in the D3 power saving state.

The RTL8402 supports the ECMA (European Computer Manufacturers Association) proxy for sleeping hosts standard. The standard specifies maintenance of network connectivity and presence via proxies in order to extend the sleep duration of higher-powered hosts. It handles some network tasks on behalf of the

host, allowing the host to remain in sleep mode for longer periods. Required and optional behavior of an operating proxy includes generating reply packets, ignoring packets, and waking the host.

The RTL8402 supports IEEE 802.3az-2010, also known as Energy Efficient Ethernet (EEE). IEEE 802.3az-2010 operates with the IEEE 802.3 Media Access Control (MAC) Sublayer to support operation in Low Power Idle mode. When the Ethernet network is in low link utilization, EEE allows systems on both sides of the link to save power.

The RTL8402 is fully compliant with Microsoft® NDIS5, NDIS6 (IPv4, IPv6, TCP, UDP) Checksum and Segmentation Task-offload (Large send and Giant send) features, and supports IEEE 802 IP Layer 2 priority encoding and IEEE 802.1Q Virtual bridged Local Area Network (VLAN). The above features contribute to lowering CPU utilization, especially benefiting performance when in operation on a network server.

The RTL8402 supports Receive Side Scaling (RSS) to hash incoming TCP connections and load-balance received data processing across multiple CPUs. RSS improves the number of transactions per second and number of connections per second, increasing the network throughput.

The device also features interconnect PCI Express technology. PCI Express is a high-bandwidth, low-pin-count, serial, interconnect technology that offers significant improvements in performance over conventional PCI, and also maintains software compatibility with existing PCI infrastructure. The device embeds an adaptive equalizer in the PCI-E PHY for ease of system integration and excellent link quality. The equalizer enables the length of the PCB traces to reach 20 centimeters.

The RTL8402 is suitable for multiple market segments and emerging applications, such as desktop, mobile, workstation, server, communications platforms, and embedded applications.

2. Features

- Integrated 10/100M transceiver
- Auto-Negotiation with Next Page capability
- Supports PCI Express 1.1
- Supports pair swap/polarity/skew correction
- Crossover Detection & Auto-Correction
- Wake-On-LAN and remote Wakeup support
- Customized LEDs
- Controllable LED Blinking Frequency and Duty Cycle
- Microsoft® NDIS5, NDIS6 Checksum Offload (IPv4, IPv6, TCP, UDP) and Segmentation Task-offload (Large send and Giant send) support
- Supports EMAC-393 ECMA ProxZzzy Standard for sleeping hosts
- Supports Full Duplex flow control (IEEE 802.3x)
- Fully complies with IEEE 802.3 and IEEE 802.3u
- Supports IEEE 802.1P Layer 2 Priority Encoding
- Supports IEEE 802.1Q VLAN tagging
- Two-Wire Serial Interface (TWSI) EEPROM
- Embedded OTP memory can replace the external EEPROM
- Transmit/Receive on-chip buffer support
- Supports IEEE 802.3az-2010 (EEE)
- XTAL-Less Wake-On-LAN
- Supports power down/link down power saving/PHY disable mode/LAN disable mode
- Built-in LDO regulator
- Supports PCI MSI (Message Signaled Interrupt) and MSI-X
- Supports Quad Core Receive-Side Scaling (RSS)
- 48-pin QFN package (Green package)
- Embeds an adaptive equalizer in PCI Express PHY (PCB traces to reach up to 20cm)
- Supports 1-Lane 2.5Gbps PCI Express Bus
- Memory card interface support:
 - ◆ Secure Digital (SD v3.0, UHS mode), SDXC (up to 2TB), Mini-SD, Micro-SD (T-flash), MultiMediaCard (MMC v4.2), RS-MMC, Mobile-MMC, and MMC-micro
 - ◆ Memory Stick (MS v1.43), Memory Stick PRO (MS-PRO v1.03), MS Duo, MS-PRO Duo, and Micro-MS (M2), MS PRO-HG Duo v1.01 8-bit mode, MSXC (up to 2TB)
 - ◆ xD-Picture Card (xD v1.2) including Type M+, Type M, and Type H
- Supports hardware ECC (Error Correction Code) function
- Supports hardware CRC (Cyclic Redundancy Check) function
- On-chip MOSFET with 800mA capability for direct power control of all types of memory cards

3. System Applications

- PCI Express 10/100M Ethernet on Motherboard, Notebook, or Embedded system

4. Pin Assignments

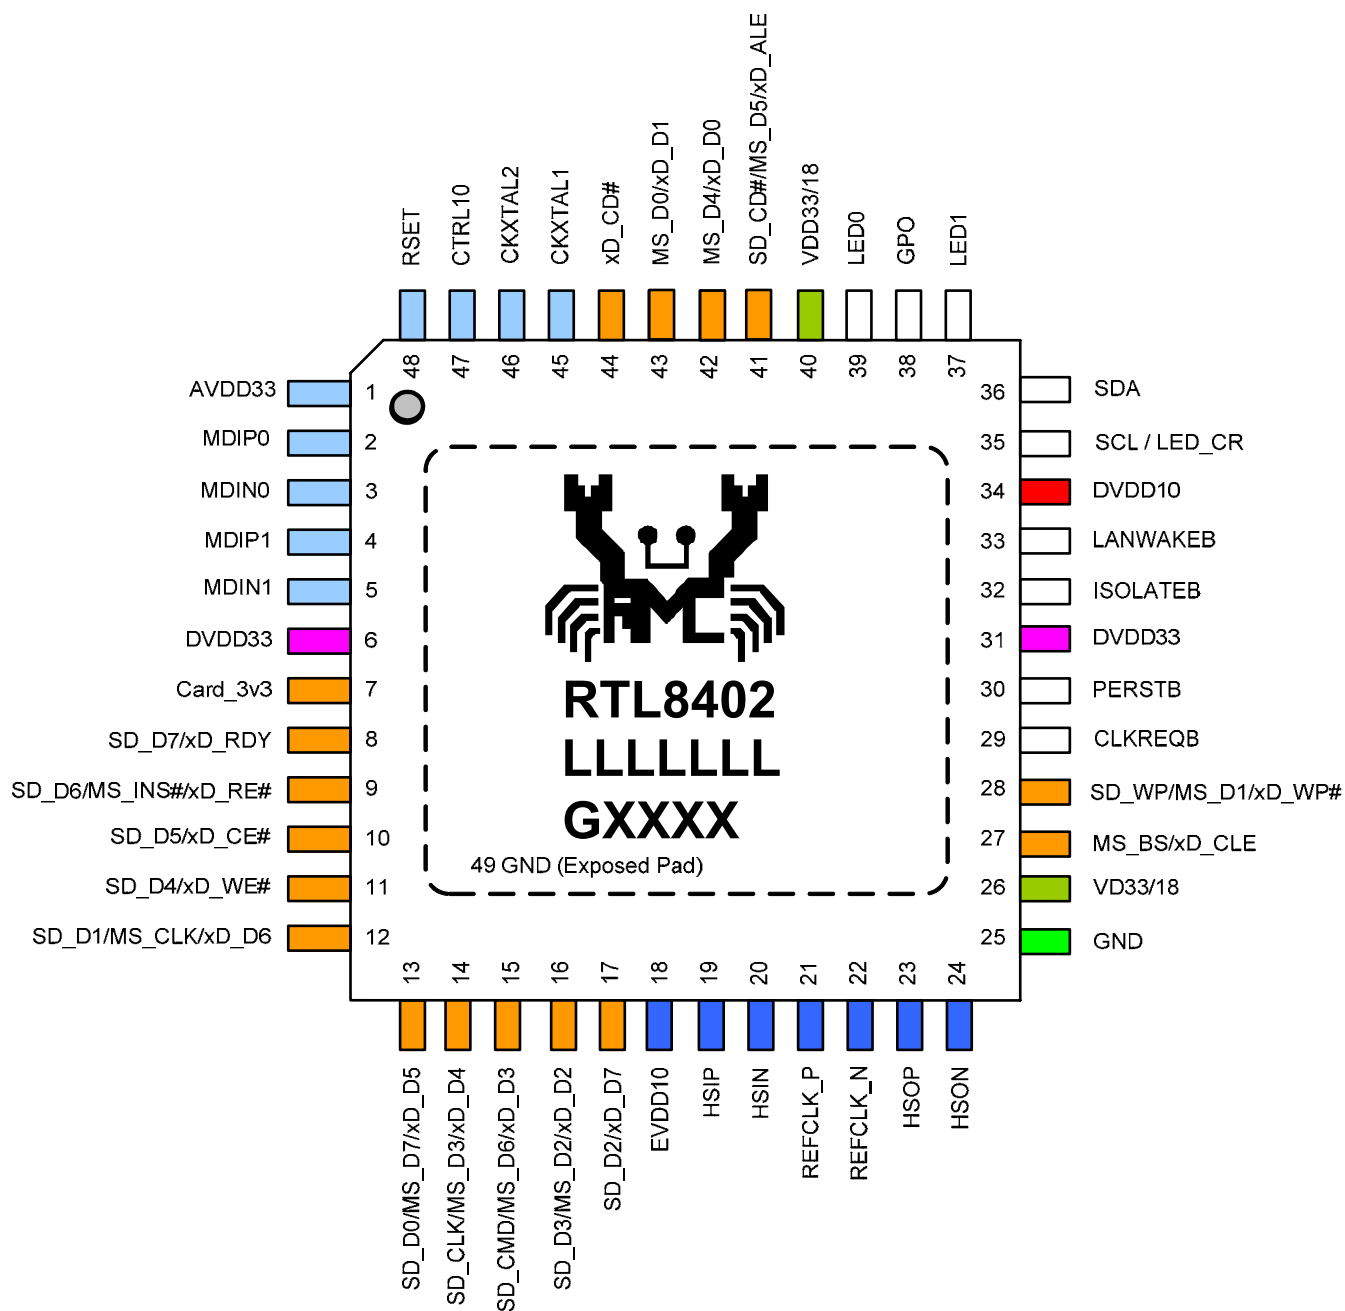


Figure 1. Pin Assignments

4.1. Package Identification

Green package is indicated by the 'G' in GXXXX (Figure 1).

5. Pin Descriptions

The signal type codes below are used in the following tables:

I: Input

O/D: Open Drain

O: Output

P: Power

5.1. Power Management/Isolation

Table 1. Power Management/Isolation

Symbol	Type	Pin No	Description
LANWAKEB	O/D	33	Power Management Event: Open drain, active low. Used to reactivate the PCI Express slot's main power rails and reference clocks.
ISOLATEB	I	32	Isolate Pin: Active low. Used to isolate the RTL8402 from the PCI Express bus. The RTL8402 will not drive its PCI Express outputs (excluding LANWAKEB) and will not sample its PCI Express input as long as the Isolate pin is asserted.

5.2. PCI Express Interface

Table 2. PCI Express Interface

Symbol	Type	Pin No	Description
REFCLK_P	I	21	PCI Express Differential Reference Clock Source: 100MHz $\pm$ 300ppm.
REFCLK_N	I	22	
HSOP	O	23	PCI Express Transmit Differential Pair.
HSOIN	O	24	
HSIP	I	19	PCI Express Receive Differential Pair.
HSIN	I	20	
PERSTB	I	30	PCI Express Reset Signal: Active low. When the PERSTB is asserted at power-on state, the RTL8402 returns to a pre-defined reset state and is ready for initialization and configuration after the de-assertion of the PERSTB.
CLKREQB	O/D	29	Reference Clock Request Signal. This signal is used by the RTL8402 to request starting of the PCI Express reference clock.

5.3. EEPROM (TWSI)

Table 3. EEPROM (TWSI)

Symbol	Type	Pin No	Description
SCL/LED_CR	O	35	SCL: Clock interface for TWSI EEPROM.
SDA	IO	36	SDA: Data interface for TWSI EEPROM. Refer to the reference schematic for strapping pin information. All strapping pins are power-on latch pins.

5.4. Transceiver Interface

Table 4. Transceiver Interface

Symbol	Type	Pin No	Description
MDIP0	IO	2	In MDI mode, this pair acts as the BI_DA+/- pair, and is the transmit pair in 10Base-T and 100Base-TX.
MDIN0	IO	3	In MDI crossover mode, this pair acts as the BI_DB+/- pair, and is the receive pair in 10Base-T and 100Base-TX.
MDIP1	IO	4	In MDI mode, this pair acts as the BI_DB+/- pair, and is the receive pair in 10Base-T and 100Base-TX.
MDIN1	IO	5	In MDI crossover mode, this pair acts as the BI_DA+/- pair, and is the transmit pair in 10Base-T and 100Base-TX.

5.5. Clock

Table 5. Clock

Symbol	Type	Pin No	Description
CKXTAL1	I	45	Input of 25MHz Clock Reference.
CKXTAL2	IO	46	Output of 25MHz Clock Reference. Input of External Clock Source.

5.6. Reference

Table 6. Reference

Symbol	Type	Pin No	Description
RSET	I	48	Reference. External resistor reference.

5.7. LEDs

Table 7. LEDs

Symbol	Type	Pin No	Description
SCL/LED_CR	O	35	See Section 6.2.5 Customizable LED Configuration, Page 11 for Details.
LED0	O	39	
LED1	O	37	

Note: During power down mode, the LED signals are logic high.

5.8. Card Reader

Table 8. Card Reader

Symbol	Type	Pin No	Description
SD_D0/MS_D7/xD_D5	IO	13	SD Data 0 (SD_DAT0), MS_Data 7 (MS_D7), and xD Data 5 (xD_D5).
SD_D1/MS_CLK/xD_D6	IO	12	SD Data 1 (SD_DAT1), MS Clock (MS_CLK), and xD Data 6 (xD_D6).
SD_D2/xD_D7	IO	17	SD Data 2 (SD_DAT2) and xD Data 7 (xD_D7).
SD_D3/MS_D2/xD_D2	IO	16	SD Data 3 (SD_DAT3), MS_Data 2 (MS_D2), and xD Data 2 (xD_D2).
SD_D4/xD_WE#	IO	11	SD Data 4 (SD_DAT4) and xD Write Enable (xD_WE#).
SD_D5/xD_CE#	IO	10	SD Data 5 (SD_DAT5) and xD Chip Select (xD_CE#).
SD_D6/MS_INS#/xD_RE#	IO	9	SD Data 6 (SD_DAT6), MS Card Detect (MS_INS#), and xD Read Enable (xD_RE#).
SD_D7/xD_RDY	IO	8	SD Data 7 (SD_DAT7) and xD Ready Signal (xD_RDY).
SD_CLK/MS_D3/xD_D4	IO	14	SD Clock (SD_CLK), MS_Data 3 (MS_D3), and xD Data 4 (xD_D4).
SD_CMD/MS_D6/xD_D3	IO	15	SD Serial Protocol Command, and Response Signal, MS_Data 6 (MS_D6), and xD Data 3 (xD_D3).
SD_WP/MS_D1/xD_WP#	IO	28	SD Write Protect (SD_WP), MS_Data 1 (MS_D1), and xD Write Protect (xD_WP#).
SD_CD#/MS_D5/xD_ALE	IO	41	SD Card Detect (SD_CD#), MS_Data 5 (MS_D5), and xD Address Latch Enable (xD_ALE).
MS_BS/xD_CLE	IO	27	MS_BS and xD Command Latch Enable (xD_CLE).
MS_D4/xD_D0	IO	42	MS_Data 4 (MS_D4) and xD Data 0 (xD_D0).
MS_D0/xD_D1	IO	43	MS_Data 0 (MS_D0) and xD Data 1 (xD_D1).
xD_CD#	I	44	xD Card Detect (xD_CD).

5.9. GPO Pin

Table 9. GPO Pin

Symbol	Type	Pin No	Description
GPO	IO	38	General Purpose IO Pin (Used for Power Saving Feature).

5.10. Power and Ground

Table 10. Power and Ground

Symbol	Type	Pin No	Description
DVDD33	P	6, 31	Digital 3.3V Power Supply.
DVDD10	P	34	Digital 1.05V Power Supply.
EVDD10	P	18	LDO Regulator 1.05V Output.
Card_3V3	P	7	3.3V Power for All Cards.
VDD33/18	P	26, 40	SD UHS Mode Power Supply.
CTRL10	P	47	LDO Regulator 1.05V Output.
AVDD33	P	1	Analog 3.3V Power Supply.
GND	P	25	Ground.
GND	P	49	Ground (Exposed Pad).

Note: Refer to the most updated schematic circuit for correct configuration.

6. Functional Description

6.1. PCI Express Bus Interface

The RTL8402 complies with PCI Express Base Specification Revision 1.1, and runs at a 2.5GHz signaling rate with X1 link width, i.e., one transmit and one receive differential pair. The RTL8402 supports four types of PCI Express messages: interrupt messages, error messages, power management messages, and hot-plug messages. To ease PCB layout constraints, PCI Express lane polarity reversal and link reversal are also supported.

6.1.1. PCI Express Transmitter

The RTL8402's PCI Express block receives digital data from the Ethernet interface and performs data scrambling with Linear Feedback Shift Register (LFSR) and 8B/10B coding technology into 10-bit code groups. Data scrambling is used to reduce the possibility of electrical resonance on the link, and 8B/10B coding technology is used to benefit embedded clocking, error detection, and DC balance by adding an overhead to the system through the addition of 2 extra bits. The data code groups are passed through its serializer for packet framing. The generated 2.5Gbps serial data is transmitted onto the PCB trace to its upstream device via a differential driver.

6.1.2. PCI Express Receiver

The RTL8402's PCI Express block receives 2.5Gbps serial data from its upstream device to generate parallel data. The receiver's PLL circuits are re-synchronized to maintain bit and symbol lock. Through 8B/10B decoding technology and data de-scrambling, the original digital data is recovered and passed to the RTL8402's internal Ethernet MAC to be transmitted onto the Ethernet media.

6.2. LED Functions

The RTL8402 supports three LED signals in four different configurable operation modes. The SCL pin can be shared with the LED_CR pin for card reader function. The following sections describe the various Ethernet Controller LED actions.

6.2.1. Link Monitor

The Link Monitor senses link integrity, such as LINK10, LINK100, LINK10/ACT, LINK100/ACT. Whenever link status is established, the specific link LED pin is driven low. Once a cable is disconnected, the link LED pin is driven high, indicating that no network connection exists.

6.2.2. RX LED

In 10/100M mode, blinking of the RX LED indicates that receive activity is occurring.

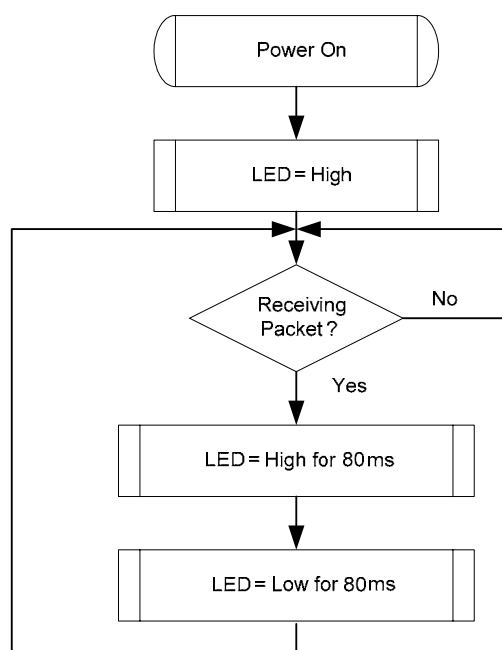


Figure 2. RX LED

6.2.3. TX LED

In 10/100M mode, blinking of the TX LED indicates that transmit activity is occurring.

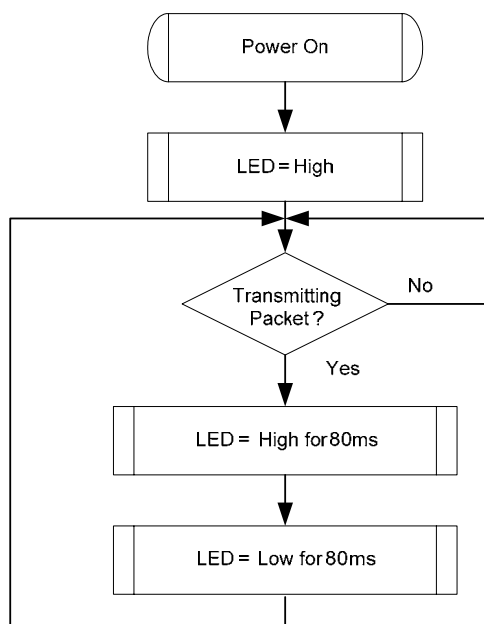


Figure 3. TX LED

6.2.4. TX/RX LED

In 10/100M mode, blinking of the TX/RX LED indicates that both transmit and receive activity is occurring.

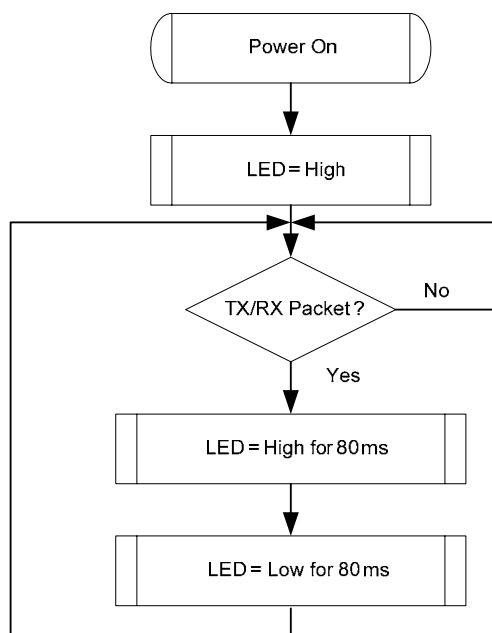


Figure 4. TX/RX LED

6.2.5. Customizable LED Configuration

The RTL8402 supports customizable LED operation modes via IO register offset 18h~19h. Table 11 describes the different LED actions.

Table 11. LED Select (IO Register Offset 18h~19h)

Bit	Symbol	RW	Description
15:12	Feature	RW	LED Feature Control
11:8	RSVD	-	Reserved
7:4	LEDSEL1	RW	LED Select for PINLED1
3:0	LEDSEL0	RW	LED Select for PINLED0

When implementing customized LEDs:

Configure IO register offset 18h~19h to support your own LED signals. For example, if the value in the IO offset 0x18 is 0x00A9h (0000 0000 1010_1001b), the LED actions are:

- LED 0: On only in 10M mode, with blinking during TX/RX
- LED 1: On only in 100M mode, with blinking during TX/RX

Table 12. Customized LEDs

Speed	LINK			ACT/Full
	Link 10M	Link 100M	RSVD	
LED 0	Bit 0	Bit 1	Bit 2	Bit 3
LED 1	Bit 4	Bit 5	Bit 6	Bit 7
RSVD	Bit 8	Bit 9	Bit 10	Bit 11
Feature Control	Bit 12	Bit 13	Bit 14	Bit 15

Note: There is a special mode:

LED OFF Mode: Set all bits to 0. All LED pin outputs become floating (power saving).

Table 13. LED Feature Control-1

Feature Control	Bit12	Bit13	Bit14	Bit15
0	LED0 Low Active	LED1 Low Active	RSVD	Indicates Option 1 of Table 15 is selected
1	LED0 High Active	LED1 High Active	RSVD	Indicates Option 2 of Table 15 is selected

Table 14. LED Feature Control-2

LED Pin	ACT=0	ACT=1
LINK=0	Floating	All Speed ACT
LINK>0	Selected Speed LINK	Option 1 (see Table 15): Selected Speed LINK+ Selected Speed ACT Option 2 (see Table 15): Selected Speed LINK+ All Speed ACT

Table 15. LED Option 1 & Option 2 Settings

Link Bit		Active Bit	Description		
10	100		Link	Option 1 LED Activity	Option 2 LED Activity
0	0	0	LED Off		
0	0	1	-	$Act^{10}+Act^{100}$	$Act^{10}+Act^{100}$
0	1	0	$Link^{100}$	-	-
0	1	1	$Link^{100}$	Act^{100}	$Act^{10}+Act^{100}$
1	0	0	$Link^{10}$	-	-
1	0	1	$Link^{10}$	Act^{10}	$Act^{10}+Act^{100}$
1	1	0	$Link^{10}+Link^{100}$	-	-
1	1	1	$Link^{10}+Link^{100}$	$Act^{10}+Act^{100}$	$Act^{10}+Act^{100}$

Note:

Act^{10} = LED blinking when Ethernet packets transmitted/received at 10Mbps.

Act^{100} = LED blinking when Ethernet packets transmitted/received at 100Mbps.

$Link^{10}$ = LED lit when Ethernet connection established at 10Mbps.


$Link^{100}$ = LED lit when Ethernet connection established at 100Mbps.

6.2.6. LED Blinking Frequency Control

The RTL8402 supports LED blinking frequency control via IO register offset 1Ah to control user's LED blinking frequency and duty cycle (see Table 16). If the IO offset 0x1A is 0x0B (00001011b), the LED blinking frequency is 80ms and the duty cycle is 75%. The LED State is shown in Figure 5.

Table 16. LED Blinking Frequency Control (IO Offset 1Ah)

Bit	RW	Description
3:2	RW	LED Blinking Frequency 0: 240ms 1: 160ms (Default) 2: 80ms 3: Link Speed Dependent
1:0	RW	LED Blinking Duty Cycle 0: 12.5% 1: 25% 2: 50% (Default) 3: 75%

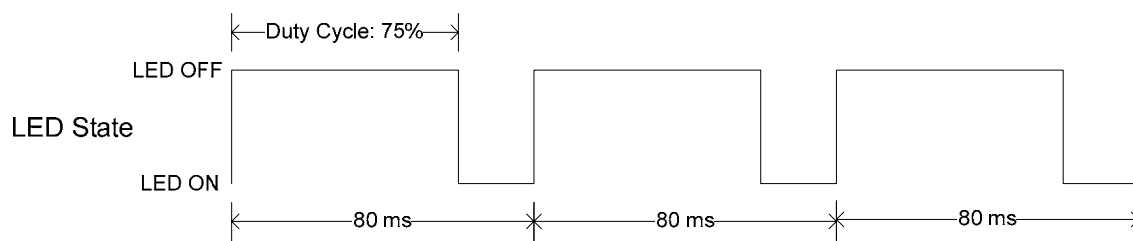

Note: Assume the LED is in low active.

Figure 5. LED Blinking Frequency Example

6.3. PHY Transceiver

6.3.1. PHY Transmitter

Based on state-of-the-art DSP technology and mixed-mode signal processing technology, the RTL8402 operates at 10/100M over standard CAT.5 UTP cable (100M), and CAT.3 UTP cable (10Mbps).

MII (100Mbps) Mode

The transmitted 4-bit nibbles (TXD[3:0]) from the MAC, clocked at 25MHz (TXC), are converted into 5B symbol code through 4B/5B coding technology, then through scrambling and serializing, are converted to 125MHz NRZ and NRZI signals. After that, the NRZI signals are passed to the MLT3 encoder, then to the D/A converter and transmitted onto the media.

MII (10Mbps) Mode

The transmitted 4-bit nibbles (TXD[3:0]) from the MAC, clocked at 2.5MHz (TXC), are serialized into 10Mbps serial data. The 10Mbps serial data is converted into a Manchester-encoded data stream and is transmitted onto the media by the D/A converter.

6.3.2. PHY Receiver

MII (100Mbps) Mode

The MLT3 signal is processed with an ADC, equalizer, BLW (Baseline Wander) correction, timing recovery, MLT3 and NRZI decoder, descrambler, 4B/5B decoder, and is then presented to the MII interface in 4-bit-wide nibbles at a clock speed of 25MHz.

MII (10Mbps) Mode

The received differential signal is converted into a Manchester-encoded stream first. Next, the stream is processed with a Manchester decoder and is de-serialized into 4-bit-wide nibbles. The 4-bit nibbles are presented to the MII interface at a clock speed of 2.5MHz.

6.3.3. Link Down Power Saving Mode

The RTL8402 implements link-down power saving, greatly cutting power consumption when the network cable is disconnected. The RTL8402 automatically enters link down power saving mode ten seconds after the cable is disconnected from it. Once it enters link down power saving mode, it transmits normal link pulses on its TX pins and continues to monitor the RX pins to detect incoming signals. After it detects an incoming signal, it wakes up from link down power saving mode and operates in normal mode according to the result of the connection.

6.4. EEPROM Interface

The RTL8402 can use internal eFUSE memory or an external EEPROM. The Two-Wire Serial Interface (TWSI) EEPROM is a 16Kbit EEPROM. The interface permits the RTL8402 to read from, and write data to, an external serial EEPROM device.

Values in the internal eFUSE memory or external EEPROM allow default fields in PCI configuration space and I/O space to be overridden following a power-on or software EEPROM auto-load command. The RTL8402 will auto-load values from the eFUSE or EEPROM. If the EEPROM is not present and eFUSE auto-load is bypassed, the RTL8402 initialization uses default values for the appropriate Configuration and Operational Registers. Software can read and write to the EEPROM using bit-bang accesses via the PCI VPD (Vital Product Data). The TWSI EEPROM interface consists of SCL and SDA.

The correct EEPROM (i.e., TWSI) must be used in order to ensure proper LAN function.

Table 17. TWSI EEPROM Interface

EEPROM	Description
SCL	Serial Clock.
SDA	Serial Data I/O.

6.5. Power Management

The RTL8402 is compliant with ACPI (Rev 1.0, 1.0b, 2.0), PCI Power Management (Rev 1.1), PCI Express Active State Power Management (ASPM), and Network Device Class Power Management Reference Specification (V1.0a), such as to support an Operating System-directed Power Management (OSPM) environment.

The RTL8402 can monitor the network for a Wakeup Frame or a Magic Packet, and notify the system via a PCI Express Power Management Event (PME) Message, Beacon, or LANWAKEB pin when such a packet is received. The system can then be restored to a normal state to process incoming jobs.

When the RTL8402 is in power down mode (D1 ~ D3):

- The RX state machine is stopped. The RTL8402 monitors the network for wakeup events such as a Magic Packet and Wakeup Frame in order to wake up the system. When in power down mode, the RTL8402 will not reflect the status of any incoming packets in the ISR register and will not receive any packets into the RX on-chip buffer.
- The on-chip buffer status and packets that have already been received into the RX on-chip buffer before entering power down mode are held by the RTL8402.
- Transmission is stopped. PCI Express transactions are stopped. The TX on-chip buffer is held.
- After being restored to D0 state, the RTL8402 transmits data that was not moved into the TX on-chip buffer during power down mode. Packets that were not transmitted completely last time are re-transmitted.

The D3cold_support_PME bit (bit15, PMC register) and the Aux_I_b2:0 bits (bit8:6, PMC register) in PCI configuration space depend on the existence of Aux power. If aux. power is absent, the above 4 bits are all 0 in binary.

Example:

If EEPROM D3c_support_PME = 1:

- If aux. power exists, then PMC in PCI config space is the same as EEPROM PMC (if EEPROM PMC = C3 FF, then PCI PMC = C3 FF)
- If aux. power is absent, then PMC in PCI config space is the same as EEPROM PMC except the above 4 bits are all 0's (if EEPROM PMC = C3 FF, then PCI PMC = 03 7E)

In the above case, if wakeup support is desired when main power is off, we suggest that the EEPROM PMC be set to C3 FF (Realtek EEPROM default value).

If EEPROM D3c_support_PME = 0:

- If aux. power exists, then PMC in PCI config space is the same as EEPROM PMC (if EEPROM PMC = C3 7F, then PCI PMC = C3 7F)
- If aux. power is absent, then PMC in PCI config space is the same as EEPROM PMC except the above 4 bits are all 0's (if EEPROM PMC = C3 7F, then PCI PMC = 03 7E)

In the above case, if wakeup support is not desired when main power is off, it is suggested that the EEPROM PMC be set to 03 7E.

Magic Packet Wakeup occurs only when the following conditions are met:

- The destination address of the received Magic Packet is acceptable to the RTL8402, e.g., a broadcast, multicast, or unicast packet addressed to the current RTL8402 adapter.
- The received Magic Packet does not contain a CRC error.
- The Magic bit (CONFIG3#5) is set to 1, the PMEn bit (CONFIG1#0) is set to 1, and the corresponding wakeup method (message, beacon, or LANWAKEB) can be asserted in the current power state.
- The Magic Packet pattern matches, i.e., 6 * FFh + MISC (can be none) + 16 * DID (Destination ID) in any part of a valid Ethernet packet.

A Wakeup Frame event occurs only when the following conditions are met:

- The destination address of the received Wakeup Frame is acceptable to the RTL8402, e.g., a broadcast, multicast, or unicast address to the current RTL8402 adapter.
- The received Wakeup Frame does not contain a CRC error.
- The PMEn bit (CONFIG1#0) is set to 1.
- The 16-bit CRC* of the received Wakeup Frame matches the 16-bit CRC of the sample Wakeup Frame pattern given by the local machine's OS. Or, the RTL8402 is configured to allow direct packet wakeup, e.g., a broadcast, multicast, or unicast network packet.

Note: 16-bit CRC: The RTL8402 supports eight long wakeup frames (covering 128 mask bytes from offset 0 to 127 of any incoming network packet).

The corresponding wakeup method (message, beacon, or LANWAKEB) is asserted only when the following conditions are met:

- The PMEn bit (bit0, CONFIG1) is set to 1.
- The PME_En bit (bit8, PMCSR) in PCI Configuration Space is set to 1.
- The RTL8402 may assert the corresponding wakeup method (message, beacon, or LANWAKEB) in the current power state or in isolation state, depending on the PME_Support (bit15-11) setting of the PMC register in PCI Configuration Space.
- A Magic Packet, LinkUp, or Wakeup Frame has been received.
- Writing a 1 to the PME_Status (bit15) of the PMCSR register in the PCI Configuration Space clears this bit and causes the RTL8402 to stop asserting the corresponding wakeup method (message, beacon, or LANWAKEB) (if enabled).

When the RTL8402 is in power down mode, e.g., D1~D3, the IO and MEM accesses to the RTL8402 are disabled. After a PERSTB assertion, the device's power state is restored to D0 automatically if the original power state was D3_{cold}. There is almost no hardware delay at the device's power state transition. When in ACPI mode, the device does not support PME (Power Management Enable) from D0 (this is the Realtek default setting of the PMC register auto-loaded from EEPROM). The setting may be changed from the EEPROM, if required.

6.6. Vital Product Data (VPD)

Bit 31 of the Vital Product Data (VPD) capability structure in the RTL8402's PCI Configuration Space is used to issue VPD read/write commands and is also a flag used to indicate whether the transfer of data between the VPD data register and the TWSI has completed or not.

Write VPD register (write data to the EEPROM):

Set the flag bit to 1 at the same time the VPD address is written to write VPD data to EEPROM. When the flag bit is reset to 0 by the RTL8402, the VPD data (4 bytes per VPD access) has been transferred from the VPD data register to EEPROM.

Read VPD register (read data from the EEPROM):

Reset the flag bit to 0 at the same time the VPD address is written to retrieve VPD data from EEPROM. When the flag bit is set to 1 by the RTL8402, the VPD data (4 bytes per VPD access) has been transferred from EEPROM to the VPD data register.

Note1: Refer to the PCI 2.3 Specifications for further information.

Note2: The VPD address must be a DWORD-aligned address as defined in the PCI 2.3 Specifications. VPD data is always consecutive 4-byte data starting from the VPD address specified.

Note3: Realtek reserves offset 60h to 7Fh in EEPROM mainly for VPD data to be stored.

Note4: The VPD function of the RTL8402 is designed to be able to access the full range of the TWSI.

6.7. Receive-Side Scaling (RSS)

The RTL8402 is compliant with the Network Driver Interface Specification (NDIS) 6.0 Receive-Side Scaling (RSS) technology for the Microsoft Windows family of operating systems. RSS allows packet receive-processing from a network adapter to be balanced across the number of available computer processors, increasing performance on multi-CPU platforms.

6.7.1. Receive-Side Scaling (RSS) Initialization

During RSS initialization, the Windows operating system will inform the RTL8402 to store the following parameters: hash function, hash type, hash bits, indirection table, BaseCPUNumber, and the secret hash key.

Hash Function

The default hash function is the Toeplitz hash function.

Hash Type

The hash types indicate which field of the packet needs to be hashed to get the hash result. There are several combinations of these fields, mainly, TCP/IPv4, IPv4, TCP/IPv6, IPv6, and IPv6 extension headers.

- TCP/IPv4 requires hash calculations over the IPv4 source address, the IPv4 destination address, the source TCP port, and the destination TCP port.

- IPv4 requires hash calculations over the IPv4 source address and the IPv4 destination address.
- TCP/IPv6 requires hash calculations over the IPv6 source address, the IPv6 destination address, the source TCP port, and the destination TCP port.
- IPv6 requires hash calculations over the IPv6 source address and the IPv6 destination address

Hash Bits

Hash bits are used to index the hash result into the indirection table.

Indirection Table

The Indirection Table stores values that are added to the BaseCPUNumber to enable RSS interrupts to be restricted from some CPUs. The OS will update the Indirection Table to rebalance the load.

BaseCPUNumber

The lowest number CPU to use for RSS. BaseCPUNumber is added to the result of the indirection table lookup.

Secret Hash Key

The key used in the Toeplitz function. For different hash types, the key size is different.

6.7.2. Protocol Offload

Protocol offload is a task offload supported by Microsoft Windows 7. It maintains a network presence for a sleeping higher power host. Protocol offload prevents spurious wake up and further reduces power consumption. It maintains connectivity while hosts are asleep, including receiving requests from other nodes on the network, ignoring packets, generating packets while in the sleep state (e.g., the Ethernet Controller will generate ARP responses if the same MAC and IPv4 address are provided in the configuration data), and intelligently waking up host systems. The RTL8402 supports the ECMA (European Computer Manufacturers Association) specification including proxy configuration and management, IPv4 ARP, IPv6 NDP, and wakeup packets. The RTL8402 also supports optional ECMA items such as QoS tagged packets and duplicate address detection.

6.7.3. RSS Operation

After the parameters are set, the RTL8402 will start hash calculations on each incoming packet and forward each packet to its correct queue according to the hash result. If the incoming packet is not in the hash type, it will be forwarded to the primary queue. The hash result plus the BaseCPUNumber will be indexed into the indirection table to get the correct CPU number. The RTL8402 uses three methods to inform the system of incoming packets: inline interrupt, MSI, and MSIX. Periodically the OS will update the indirection table to rebalance the load across the CPUs.

6.8. Energy Efficient Ethernet (EEE)

The RTL8402 supports IEEE 802.3az-2010, also known as Energy Efficient Ethernet (EEE), at 10Mbps and 100Mbps. It provides a protocol to coordinate transitions to/from a lower power consumption level (Low Power Idle mode) based on link utilization. When no packets are being transmitted, the system goes to Low Power Idle mode to save power. Once packets need to be transmitted, the system returns to normal mode, and does this without changing the link status and without dropping/corrupting frames.

To save power, when the system is in Low Power Idle mode most of the circuits are disabled, however, the transition time to/from Low Power Idle mode is kept small enough to be transparent to upper layer protocols and applications.

EEE also specifies a negotiation method to enable link partners to determine whether EEE is supported and to select the best set of parameters common to both devices.

Refer to <http://www.ieee802.org/3/az/index.html> for more details.

6.9. PHY Disable Mode

The RTL8402 can power down the PHY using board-level control signals. Refer to the LAN/PHY Disable Application Note for details.

6.10. LAN Disable Mode

The Ethernet controller can be disabled via LAN disable mode. When a PCI-E reset is asserted, the RTL8402 utilizes the GPO signal to disable or enable the Ethernet Controller function. The PHY does not link and the LAN disappears under this mode. Refer to the LAN/PHY Disable Application Note for details.

6.11. XTAL-Less Wake-On-LAN

The RTL8402 supports board level design with an External 25MHz Clock Source instead of the 25MHz crystal.

The external clock source may stop generating the 25MHz clock when in suspend mode (S3/S4/S5). To support the Wake-on-LAN function without an external 25MHz clock source, the RTL8402 will automatically change its source clock from the external 25MHz clock to an internal self-oscillating auxiliary clock when it enters suspend mode. Note that when in suspend mode, the auxiliary clock can establish only a 10Mbps link and does not support ARP/NS offload and ECMA ProxZzzy.

Note: Refer to the XTAL-Less WOL Application Note for details.

7. LDO Regulator

The RTL8402 incorporates two linear Low-Dropout (LDO) regulators that features high power supply ripple rejection and low output noise. The RTL8402 embedded LDO regulators do not require power inductors on the PCB; only a 1.05V output capacitor between its 1.05V output and analog ground for phase compensation, which saves cost and PCB real estate. Use a X5R low-ESR ceramic capacitor, with a capacitance of at least 1 μ F, to enhance output voltage stability.

The output capacitors (and bypass capacitors) should be placed as close as possible to the power pins (CTRL10, DVDD10, EVDD10) for adequate filtering.

Note1: The embedded LDOs are designed for RTL8402 internal use only. Do not provide this power source to other devices.

Note2: Refer to the separate RTL8402 layout guide for details.

8. Characteristics

8.1. Absolute Maximum Ratings

WARNING: Absolute maximum ratings are limits beyond which permanent damage may be caused to the device, or device reliability will be affected. All voltages are specified reference to GND unless otherwise specified.

Table 18. Absolute Maximum Ratings

Symbol	Description	Minimum	Maximum	Unit
AVDD33, CARD_3V3, DVDD33	Supply Voltage 3.3V	-0.3	3.6	V
DVDD10, EVDD10, CTRL10	Supply Voltage 1.05V	-0.3	1.32	V
3.3V DC Input 3.3V DC Output	Input Voltage Output Voltage	-0.3	3.6	V
1.05V DC Input 1.05V DC Output	Input Voltage Output Voltage	-0.3	1.32	V
N/A	Storage Temperature	-55	+125	°C

Note: Refer to the most updated schematic circuit for correct configuration.

8.2. Recommended Operating Conditions

Table 19. Recommended Operating Conditions

Description	Pins	Minimum	Typical	Maximum	Unit
Supply Voltage VDD	AVDD33, CARD_3V3, DVDD33	3.14	3.3	3.46	V
	DVDD10, EVDD10, CTRL10	1.00	1.05	1.10	V
Ambient Operating Temperature T _A	-	0	-	70	°C
Maximum Junction Temperature	-	-	-	125	°C

Note: Refer to the most updated schematic circuit for correct configuration.

8.3. Crystal Requirements

Table 20. Crystal Requirements

Symbol	Description/Condition	Minimum	Typical	Maximum	Unit
F _{ref}	Parallel Resonant Crystal Reference Frequency, Fundamental Mode, AT-Cut Type.	-	25	-	MHz
F _{ref} Stability	Parallel Resonant Crystal Frequency Stability, Fundamental Mode, AT-Cut Type. T _a =0°C~70°C.	-30	-	30	ppm
F _{ref} Tolerance	Parallel Resonant Crystal Frequency Tolerance, Fundamental Mode, AT-Cut Type. T _a =25°C.	-50	-	50	ppm
F _{ref} Duty Cycle	Reference Clock Input Duty Cycle.	40	-	60	%
ESR	Equivalent Series Resistance.	-	-	30	Ω
Jitter	Broadband Peak-to-Peak Jitter ²	-	-	200	ps
DL	Drive Level.	-	-	0.3	mW

Note1: The CLK source can come from other places in the system, but it must accord with the parameters above.

Note 2: Broadband RMS=9ps; 25KHz to 25MHz RMS=3ps.

8.4. Oscillator Requirements

Table 21. Oscillator Requirements

Parameter	Condition	Minimum	Typical	Maximum	Unit
Frequency	-	-	25	-	MHz
Frequency Stability	T _a = 0°C~70°C	-30	-	30	ppm
Frequency Tolerance	T _a = 25°C	-50	-	50	ppm
Duty Cycle	-	40	-	60	%
Broadband Peak-to-Peak Jitter ²	-	-	-	200	ps
V _{peak-to-peak}	-	3.15	3.3	3.45	V
Rise Time	-	-	-	10	ns
Fall Time	-	-	-	10	ns
Operating Temperature Range	-	0	-	70	°C

Note 1: The CLK source can come from other places in the system, but it must accord with the parameters above.

Note 2: Broadband RMS=9ps; 25KHz to 25MHz RMS=3ps.

Note 3: Rise time and fall time are defined for 10% to 90% transition period.

8.5. Environmental Characteristics

Table 22. Environmental Characteristics

Parameter	Range	Units
Storage Temperature	-55 ~ +125	°C
Ambient Operating Temperature	0 ~ 70	°C
Moisture Sensitivity Level (MSL)	Level 3	N/A

8.6. DC Characteristics

Table 23. DC Characteristics

Symbol	Parameter	Conditions	Minimum	Typical	Maximum	Units
AVDD33, CARD_3V3, DVDD33	3.3V Supply Mean Voltage	-	3.14	3.3	3.46	V
DVDD10, EVDD10, CTRL10	1.05V Supply Mean Voltage	-	1.00	1.05	1.10	V
Voh	Minimum High Level Output Voltage	Ioh = -4mA	0.9*VDD33	-	VDD33	V
Vol	Maximum Low Level Output Voltage	Iol = 4mA	0	-	0.1*VDD33	V
Vih	Minimum High Level Input Voltage	-	2.0	-	-	V
Vil	Maximum Low Level Input Voltage	-	-	-	0.8	V
Iin	Input Current	Vin=VDD33 or GND	0	-	0.5	μA
Icc33	Maximum Operating Supply Current from 3.3V	At 100Mbps with heavy network traffic and with Card Reader R/W operation	-	850	-	mA
Icc10	Maximum Operating Supply Current from 1.05V	At 100Mbps with heavy network traffic and with Card Reader R/W operation	-	150	-	mA

Note 1: Refer to the latest schematic circuit for correct configuration.

Note 2: All Supply Mean Voltage power noise <±5% of Mean Voltage.

8.7. AC Characteristics

8.7.1. Serial EEPROM Interface Timing

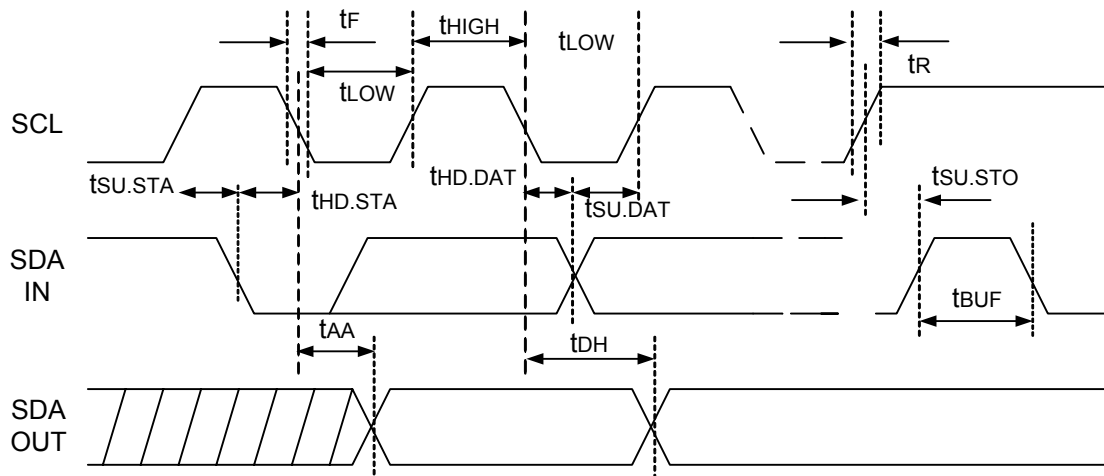


Figure 6. Serial EEPROM Interface Timing-1

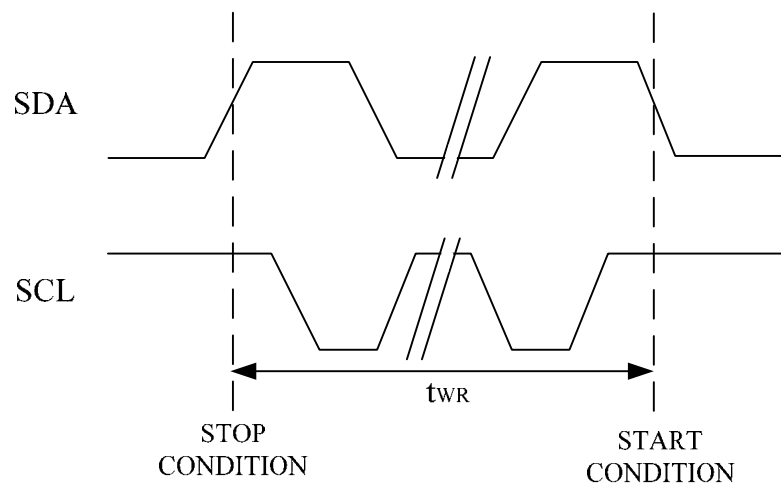
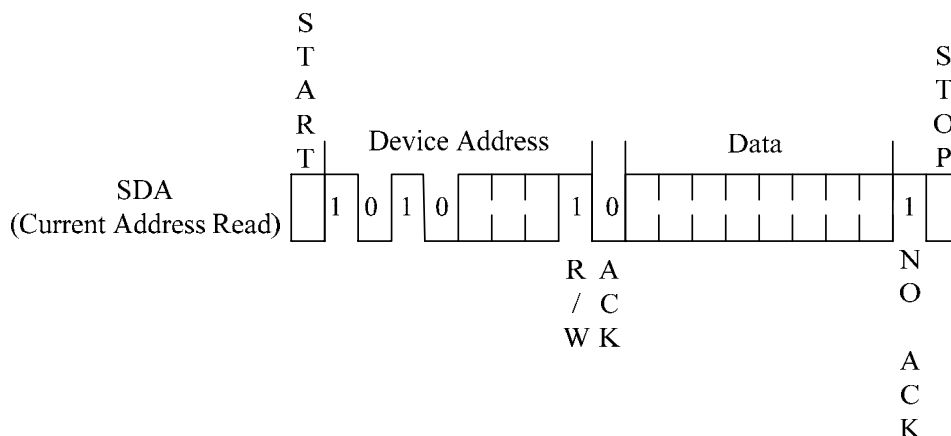
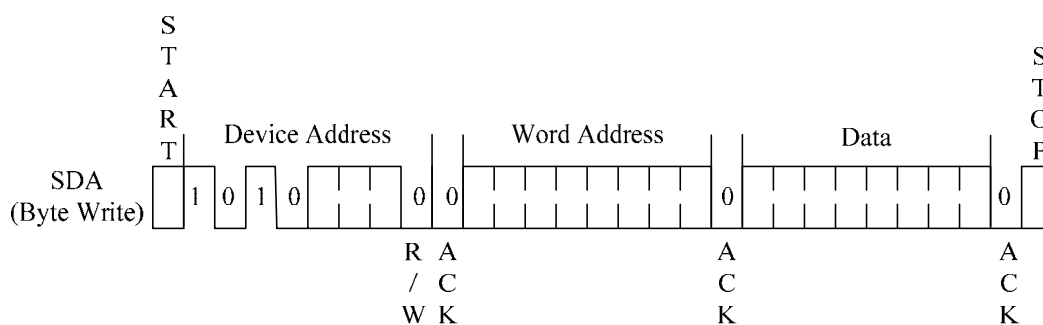


Figure 7. Serial EEPROM Interface Timing-2


Figure 8. Serial EEPROM Interface Timing-3

Figure 9. Serial EEPROM Interface Timing-4
Table 24. EEPROM Access Timing Parameters

Symbol	Parameter	1.8V		2.5V/5.0V		Unit
		Min.	Max.	Min.	Max.	
t _{LOW}	Clock Pulse Width Low	1.3	-	0.4	-	μs
t _{HIGH}	Clock Pulse Width High	0.6	-	0.4	-	μs
t _{AA}	Clock Low to DO Valid	0.05	0.9	0.05	0.55	μs
t _{BUF}	Time the bus must be free before a new transmission can start	1.3	-	0.5	-	μs
t _{HD,STA}	Start Hold Time	0.6	-	0.25	-	μs
t _{SU,STA}	Start Setup Time	0.6	-	0.25	-	μs
t _{HD,DAT}	DI Hold Time	0	-	0	-	μs
t _{SU,DAT}	DI Setup Time	100	-	100	-	μs
t _R	Input Rise Time	-	0.3	-	0.3	μs
t _F	Input Fall Time	-	300	-	100	μs
t _{SU,STO}	Stop Setup Time	0.6	-	0.25	-	μs
t _{DH}	DO Hold Time	50	-	50	-	μs
t _{WR}	Write Cycle Time		5		5	ms

8.8. PCI Express Bus Parameters

8.8.1. Differential Transmitter Parameters

Table 25. Differential Transmitter Parameters

Symbol	Parameter	Min	Typical	Max	Units
UI	Unit Interval	399.88	400	400.12	ps
$V_{TX-DIFFp-p}$	Differential Peak-to-Peak Output Voltage	0.800	-	1.05	V
$V_{TX-DE-RATIO}$	De-Emphasized Differential Output Voltage (Ratio)	-3.0	-3.5	-4.0	dB
T_{TX-EYE}	Minimum TX Eye Width	0.75	-	-	UI
$T_{TX-EYE-MEDIAN-to-MAX-JITTER}$	Maximum Time between the Jitter Median and Maximum Deviation from the Median	-	-	0.125	UI
$T_{TX-RISE}, T_{TX-FALL}$	D+/D- TX Output Rise/Fall Time	0.125	-	-	UI
$V_{TX-CM-ACp}$	RMS AC Peak Common Mode Output Voltage	-	-	20	mV
$V_{TX-CM-DCACTIVE-IDLEDELTA}$	Absolute Delta of DC Common Mode Voltage During L0 and Electrical Idle	0	-	100	mV
$V_{TX-CM-DCLINE-DELTA}$	Absolute Delta of DC Common Mode Voltage between D+ and D-	0	-	25	mV
$V_{TX-IDLE-DIFFp}$	Electrical Idle Differential Peak Output Voltage	0	-	20	mV
$V_{TX-RCV-DETECT}$	The Amount of Voltage Change Allowed During Receiver Detection	-	-	600	mV
$V_{TX-DC-CM}$	The TX DC Common Mode Voltage	0	-	3.6	V
$I_{TX-SHORT}$	TX Short Circuit Current Limit	-	-	90	mA
$T_{TX-IDLE-MIN}$	Minimum Time Spent in Electrical Idle	50	-	-	UI
$T_{TX-IDLE-SETTO-IDLE}$	Maximum Time to Transition to a Valid Electrical Idle after Sending an Electrical Idle Ordered Set	-	-	20	UI
$T_{TX-IDLE-TOTO-DIFF-DATA}$	Maximum Time to Transition to Valid TX Specifications after Leaving an Electrical Idle Condition	-	-	20	UI
$RL_{TX-DIFF}$	Differential Return Loss	10	-	-	dB
RL_{TX-CM}	Common Mode Return Loss	6	-	-	dB
$Z_{TX-DIFF-DC}$	DC Differential TX Impedance	80	100	120	Ω
$L_{TX-SKEW}$	Lane-to-Lane Output Skew	-	-	$500+2*UI$	ps
C_{TX}	AC Coupling Capacitor	75	-	200	nF
$T_{crosslink}$	Crosslink Random Timeout	0	-	1	ms

Note1: Refer to PCI Express Base Specification, rev.1.1, for correct measurement environment setting of each parameter.

Note2: The data rate can be modulated with an SSC (Spread Spectrum Clock) from +0 to -0.5% of the nominal data rate frequency, at a modulation rate in the range not exceeding 30kHz – 33kHz. The +/-300ppm requirement still holds, which requires the two communicating ports be modulated such that they never exceed a total of 600ppm difference.

8.8.2. Differential Receiver Parameters

Table 26. Differential Receiver Parameters

Symbol	Parameter	Min.	Typical	Max.	Units
UI	Unit Interval	399.88	400	400.12	ps
$V_{RX-DIFFp-p}$	Differential Input Peak-to-Peak Voltage	0.175	-	1.05	V
T_{RX-EYE}	Minimum Receiver Eye Width	0.4	-	-	UI
$T_{RX-EYE-MEDIAN-to-MAX-JITTER}$	Maximum Time between the Jitter Median and Maximum Deviation from the Median	-	-	0.3	UI
$V_{RX-CM-ACp}$	AC Peak Common Mode Input Voltage	-	-	150	mV
$RL_{RX-DIFF}$	Differential Return Loss	10	-	-	dB
RL_{RX-CM}	Common Mode Return Loss	6	-	-	dB
$Z_{RX-DIFF-DC}$	DC Differential Input Impedance	80	100	120	Ω
Z_{RX-DC}	DC Input Impedance	40	50	60	Ω
$Z_{RX-HIGH-IMP-DC}$	Powered Down DC Input Impedance	200 k	-	-	Ω
$V_{RX-IDLE-DET-DIFFp-p}$	Electrical Idle Detect Threshold	65	-	175	mV
$T_{RX-IDLE-DET-DIFFENTERTIME}$	Unexpected Electrical Idle Enter Detect Threshold Integration Time	-	-	10	ms
$L_{RX-SKEW}$	Total Skew	-	-	20	ns

Note: Refer to PCI Express Base Specification, rev.1.1, for correct measurement environment setting of each parameter.

8.8.3. REFCLK Parameters

Table 27. REFCLK Parameters

Symbol	Parameter	100MHz Input		Units	Note
		Min	Max		
Rise Edge Rate	Rising Edge Rate	0.6	4.0	V/ns	2, 3
Fall Edge Rate	Falling Edge Rate	0.6	4.0	V/ns	2, 3
V_{IH}	Differential Input High Voltage	+150	-	mV	2
V_{IL}	Differential Input Low Voltage	-	-150	mV	2
V_{CROSS}	Absolute Crossing Point Voltage	+250	+550	mV	1, 4, 5
$V_{CROSS\ DELTA}$	Variation of V_{CROSS} Over All Rising Clock Edges	-	+140	mV	1, 4, 9
V_{RB}	Ring-Back Voltage Margin	-100	+100	mV	2, 12
T_{STABLE}	Time before V_{RB} is Allowed	500	-	ps	2, 12
$T_{PERIOD\ AVG}$	Average Clock Period Accuracy	-300	+2800	ppm	2, 10, 13
$T_{PERIOD\ ABS}$	Absolute Period (Including Jitter and Spread Spectrum)	9.847	10.203	ns	2, 6
$T_{CCJITTER}$	Cycle to Cycle Jitter	-	150	ps	2
V_{MAX}	Absolute Maximum Input Voltage	-	+1.15	V	1, 7
V_{MIN}	Absolute Minimum Input Voltage	-	-0.3	V	1, 8
Duty Cycle	Duty Cycle	40	60	%	2

Symbol	Parameter	100MHz Input		Units	Note
		Min	Max		
Rise-Fall Matching	Rising Edge Rate (REFCLK+) to Falling Edge Rate (REFCLK-) Matching	-	20	%	1, 14
Z _{C-DC}	Clock Source DC Impedance	40	60	Ω	1, 11

Note1: Measurement taken from single-ended waveform.

Note2: Measurement taken from differential waveform.

Note3: Measured from -150mV to +150mV on the differential waveform (derived from REFCLK+ minus REFCLK-). The signal must be monotonic through the measurement region for rise and fall time. The 300mV measurement window is centered on the differential zero crossing. See Figure 13, page 31.

Note4: Measured at crossing point where the instantaneous voltage value of the rising edge of REFCLK+ equals the falling edge of REFCLK-. See Figure 10, page 30.

Note5: Refers to the total variation from the lowest crossing point to the highest, regardless of which edge is crossing. Refers to all crossing points for this measurement. See Figure 10, page 30.

Note6: Defines as the absolute minimum or maximum instantaneous period. This includes cycle to cycle jitter, relative ppm tolerance, and spread spectrum modulation. See Figure 12, page 30.

Note7: Defined as the maximum instantaneous voltage including overshoot. See Figure 10, page 30.

Note8: Defined as the minimum instantaneous voltage including undershoot. See Figure 10, page 30.

Note9: Defined as the total variation of all crossing voltages of Rising REFCLK+ and Falling REFCLK-. This is the maximum allowed variance in VCROSS for any particular system. See Figure 10, page 30.

Note10: Refer to Section 4.3.2.1 of the PCI Express Base Specification, Revision 1.1 for information regarding ppm considerations.

Note11: System board compliance measurements must use the test load card described in Figure 16 , page 32. REFCLK+ and REFCLK- are to be measured at the load capacitors CL. Single ended probes must be used for measurements requiring single ended measurements. Either single ended probes with math or differential probe can be used for differential measurements. Test load CL=2pF.

Note12: TSTABLE is the time the differential clock must maintain a minimum ±150mV differential voltage after rising/falling edges before it is allowed to droop back into the VRB ±100mV differential range. See Figure 15, page 31.

*Note13: PPM refers to parts per million and is a DC absolute period accuracy specification. 1ppm is 1/1,000,000th of 100.000000MHz exactly, or 100Hz. For 300ppm then we have an error budget of 100Hz/ppm*300ppm=30kHz. The period is to be measured with a frequency counter with measurement window set to 100ms or greater. The ±300ppm applies to systems that do not employ Spread Spectrum or that use common clock source. For systems employing Spread Spectrum there is an additional 2500ppm nominal shift in maximum period resulting from the 0.5% down spread resulting in a maximum average period specification of +2800ppm.*

Note14: Matching applies to rising edge rate for REFCLK+ and falling edge rate for REFCLK-. It is measured using a ±75mV window centered on the median cross point where REFCLK+ rising meets REFCLK- falling. The median cross point is used to calculate the voltage thresholds the oscilloscope is to use for the edge rate calculations. The Rise Edge Rate of REFCLK+ should be compared to the Fall Edge Rate of REFCLK-; the maximum allowed difference should not exceed 20% of the slowest edge rate. See Figure 11, page 30.

Note15: Refer to PCI Express Card Electromechanical Specification, rev.1.1, for correct measurement environment setting of each parameter.

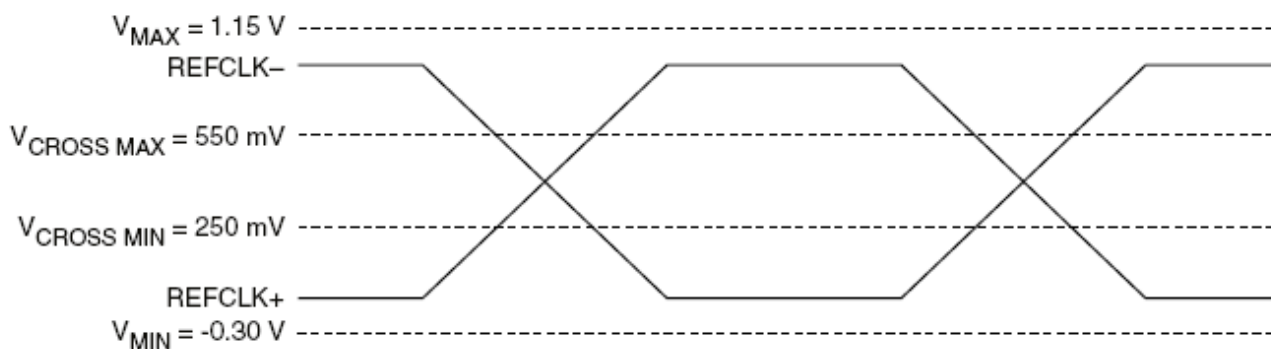


Figure 10. Single-Ended Measurement Points for Absolute Cross Point and Swing

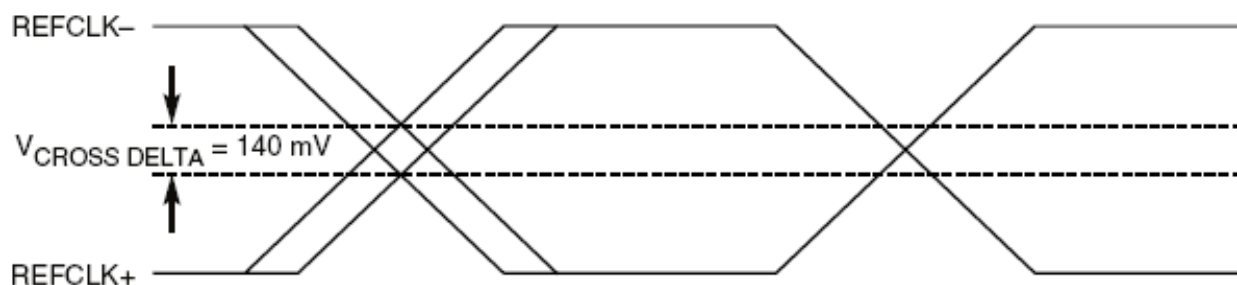


Figure 11. Single-Ended Measurement Points for Delta Cross Point

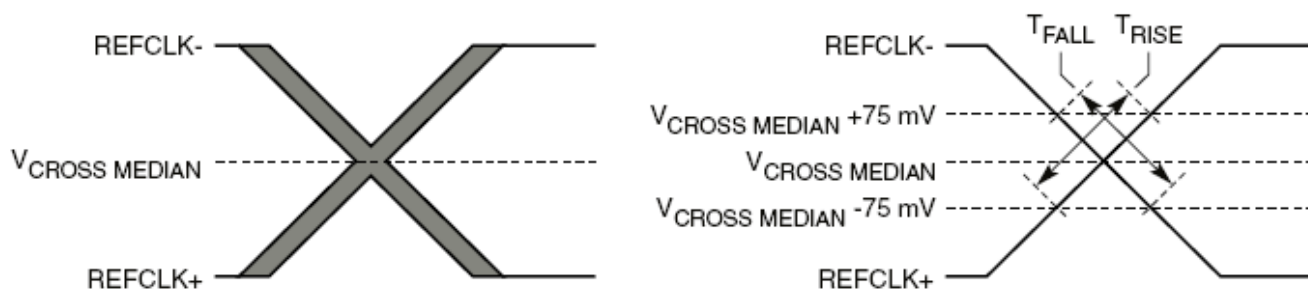


Figure 12. Single-Ended Measurement Points for Rise and Fall Time Matching

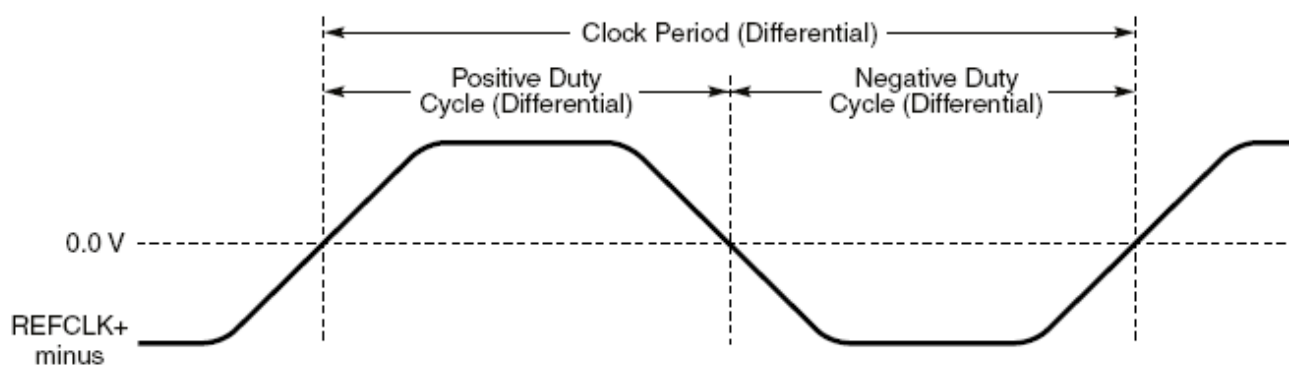


Figure 13. Differential Measurement Points for Duty Cycle and Period

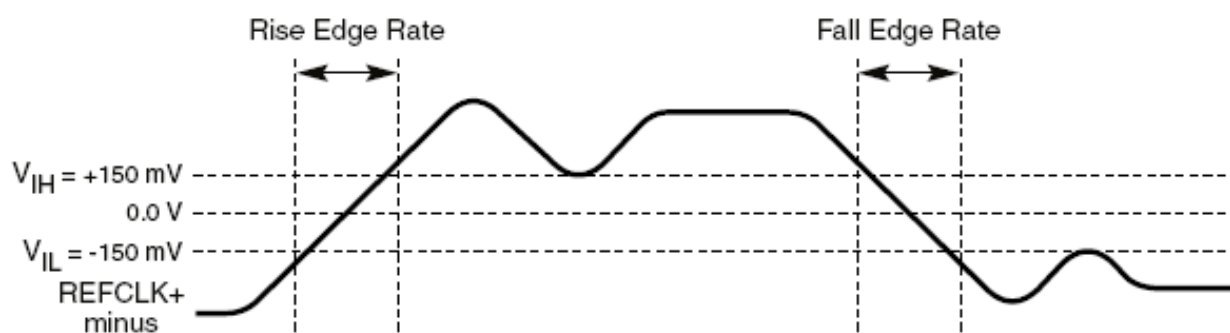


Figure 14. Differential Measurement Points for Rise and Fall Time

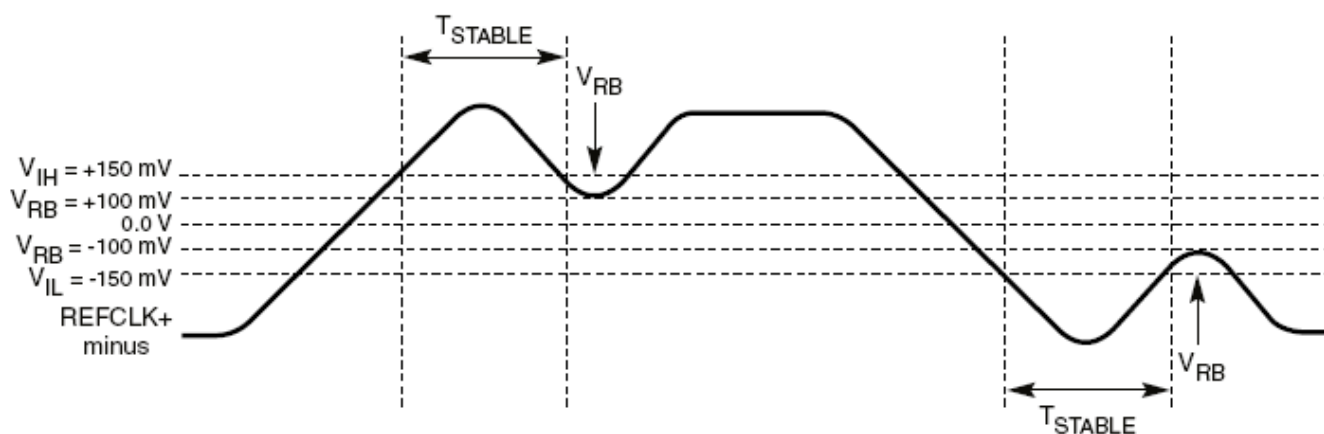


Figure 15. Differential Measurement Points for Ringback

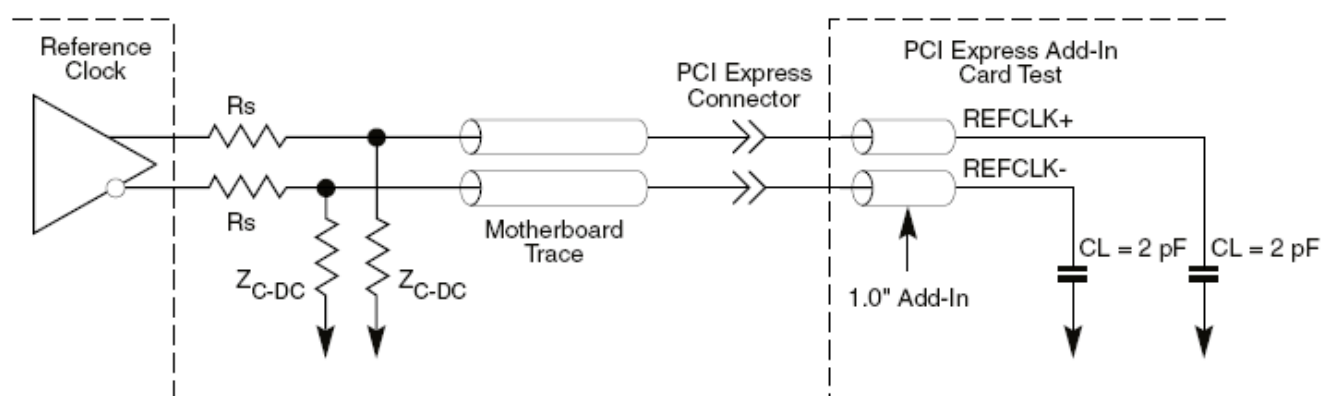


Figure 16. Reference Clock System Measurement Point and Loading

8.8.4. Auxiliary Signal Timing Parameters

Table 28. Auxiliary Signal Timing Parameters

Symbol	Parameter	Min	Max	Units
T_{PVPERL}	Power Stable to PERSTB Inactive	100	-	ms
$T_{PERST-CLK}$	REFCLK Stable before PERSTB Inactive	100	-	μ s
T_{PERST}	PERSTB Active Time	100	-	μ s
$T_{PERSTB-RTD}$	PERSTB Rising Time Duration	10	-	ms
T_{FAIL}^*	Power Level Invalid to PWRGD Inactive	-	500	ns
T_{PWON}	3.3Vaux Power On Time	1	-	ms

Note 1: T_{FAIL} means 500 ns (maximum) from the power rail going out of specification (exceeding the specified tolerances by more than 500 mV). Refer to PCI Local Bus Specification rev. 3.0 for further information. T_{FAIL} can be disregarded when implementation and timing of T_{FAIL} will not affect any LAN functions.

Note 2: 3.3V means 3.3V main power. The ISOLATEB pin should follow the behavior of the 3.3V main power waveform.


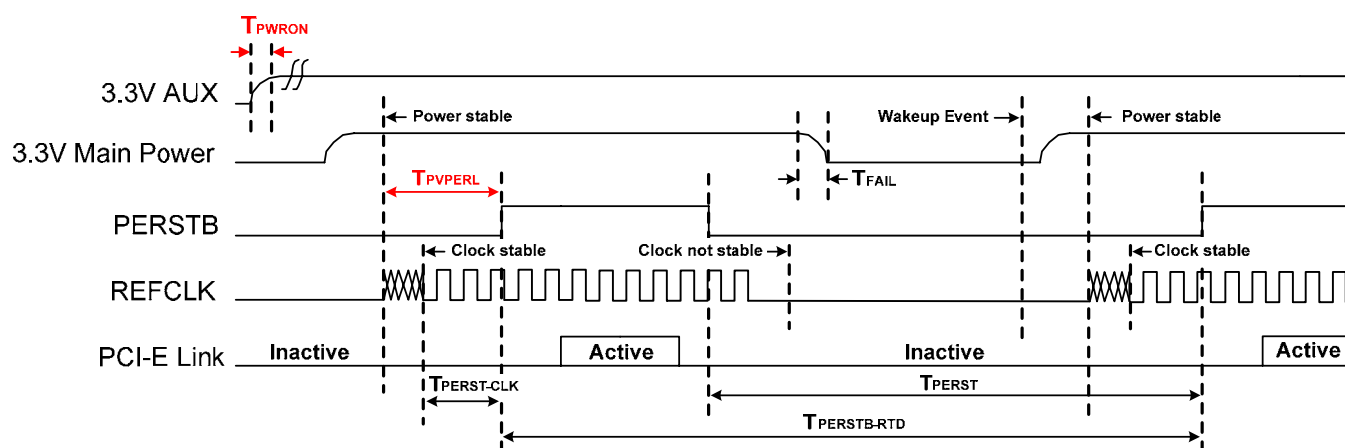


Figure 17. Auxiliary Signal Timing

9. Mechanical Dimensions

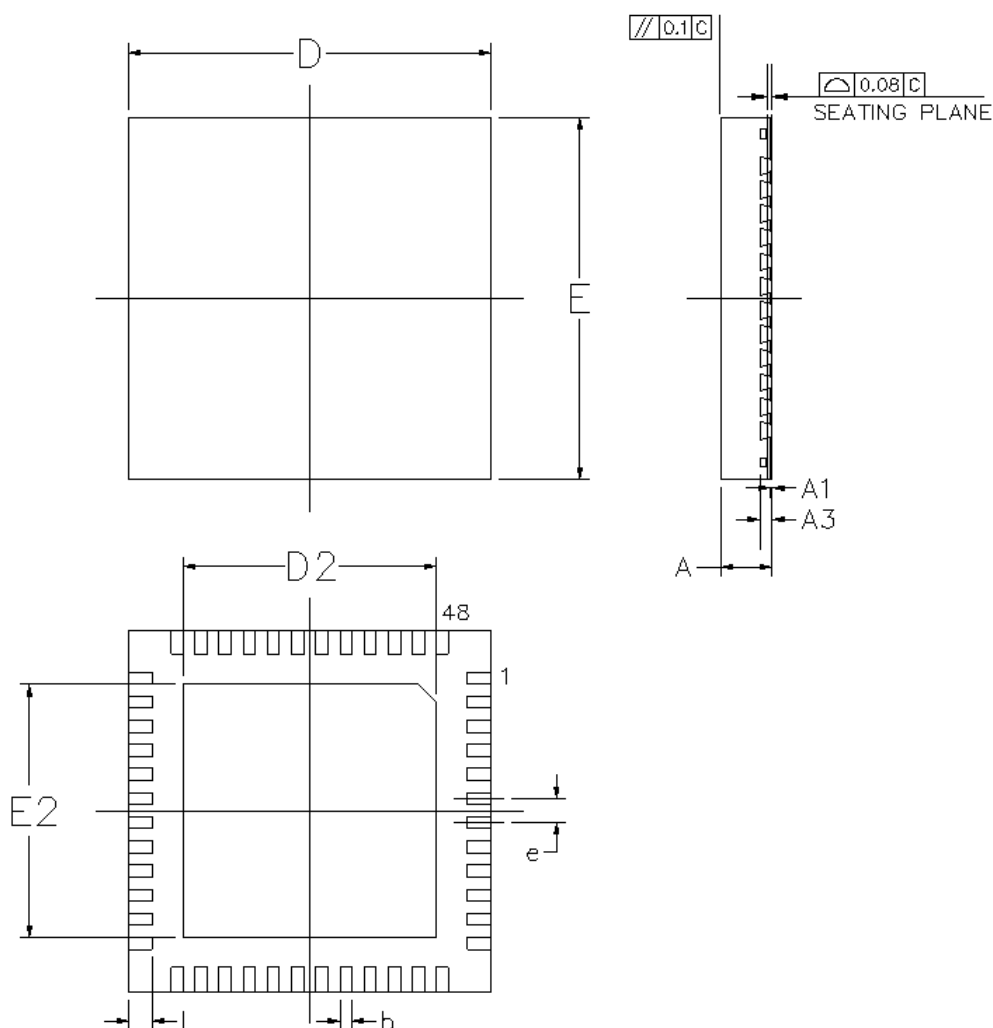

9.1. Mechanical Dimensions Notes

Symbol	Dimension in mm			Dimension in inch		
	Min	Nom	Max	Min	Nom	Max
A	0.75	0.85	1.00	0.030	0.034	0.039
A ₁	0.00	0.02	0.05	0.000	0.001	0.002
A ₃	0.20REF			0.008REF		
b	0.15	0.20	0.25	0.006	0.008	0.010
D/E	6.00BSC			0.236BSC		
D ₂ /E ₂	3.79	3.99	4.19	0.149	0.157	0.165
e	0.40BSC			0.016BSC		
L	0.30	0.40	0.50	0.012	0.016	0.020

Note 1: CONTROLLING DIMENSION: MILLIMETER (mm).

Note 2: REFERENCE DOCUMENT: JEDEC MO-220.

10. Ordering Information

Table 29. Ordering Information

Part Number	Package	Status
RTL8402-CG	48-Pin QFN ‘Green’ Package	MP

Note: See page 4 for package identification information.

Realtek Semiconductor Corp.

Headquarters

No. 2, Innovation Road II

Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

www.realtek.com

*Integrated 10/100M Ethernet & 1-LUN Card Reader
Controller for PCI Express Applications*