

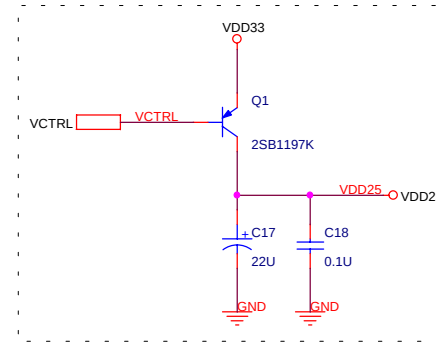


*For RTL8100 application, all bead must be rated 300mA/100ohm@100MHz

*The voltage drop of 1N5817 should be as small as possible, it's maximum voltage drop when diode on should be less than 0.3V.

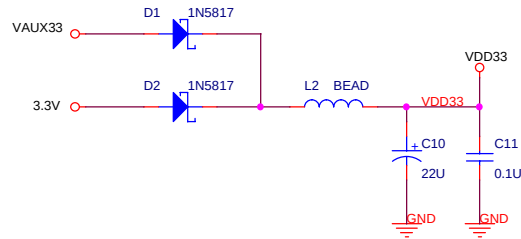

The components of this region are reserved for future use. Please reserve the component space and pads in your layout for future extension.

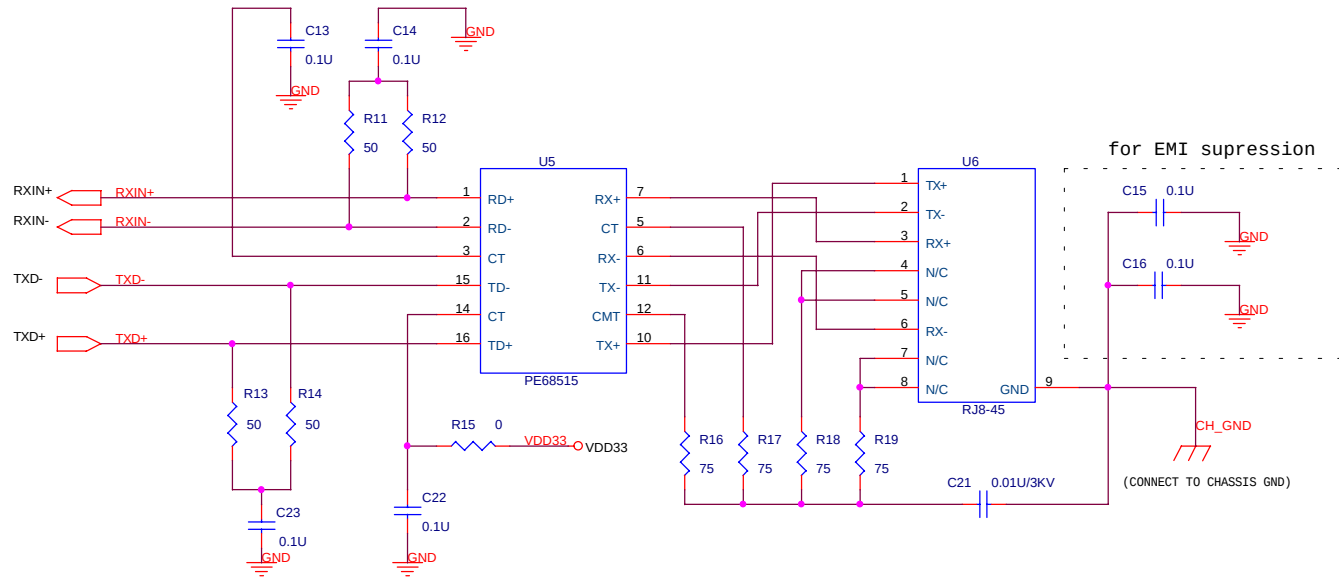

Title		
Realtek RTL8100 application circuit --EMBADDED SYSTEM		
Size	Document Number	Rev
B	Rd8100em	1.01
Date:	Tuesday, November 21, 2000	Sheet 2 of 3