


Important:

*For RTL8100BL application, all bead must be rated
300mA/100ohm@100MHz
Note: The 2.5V must be powered up before 3.3V.

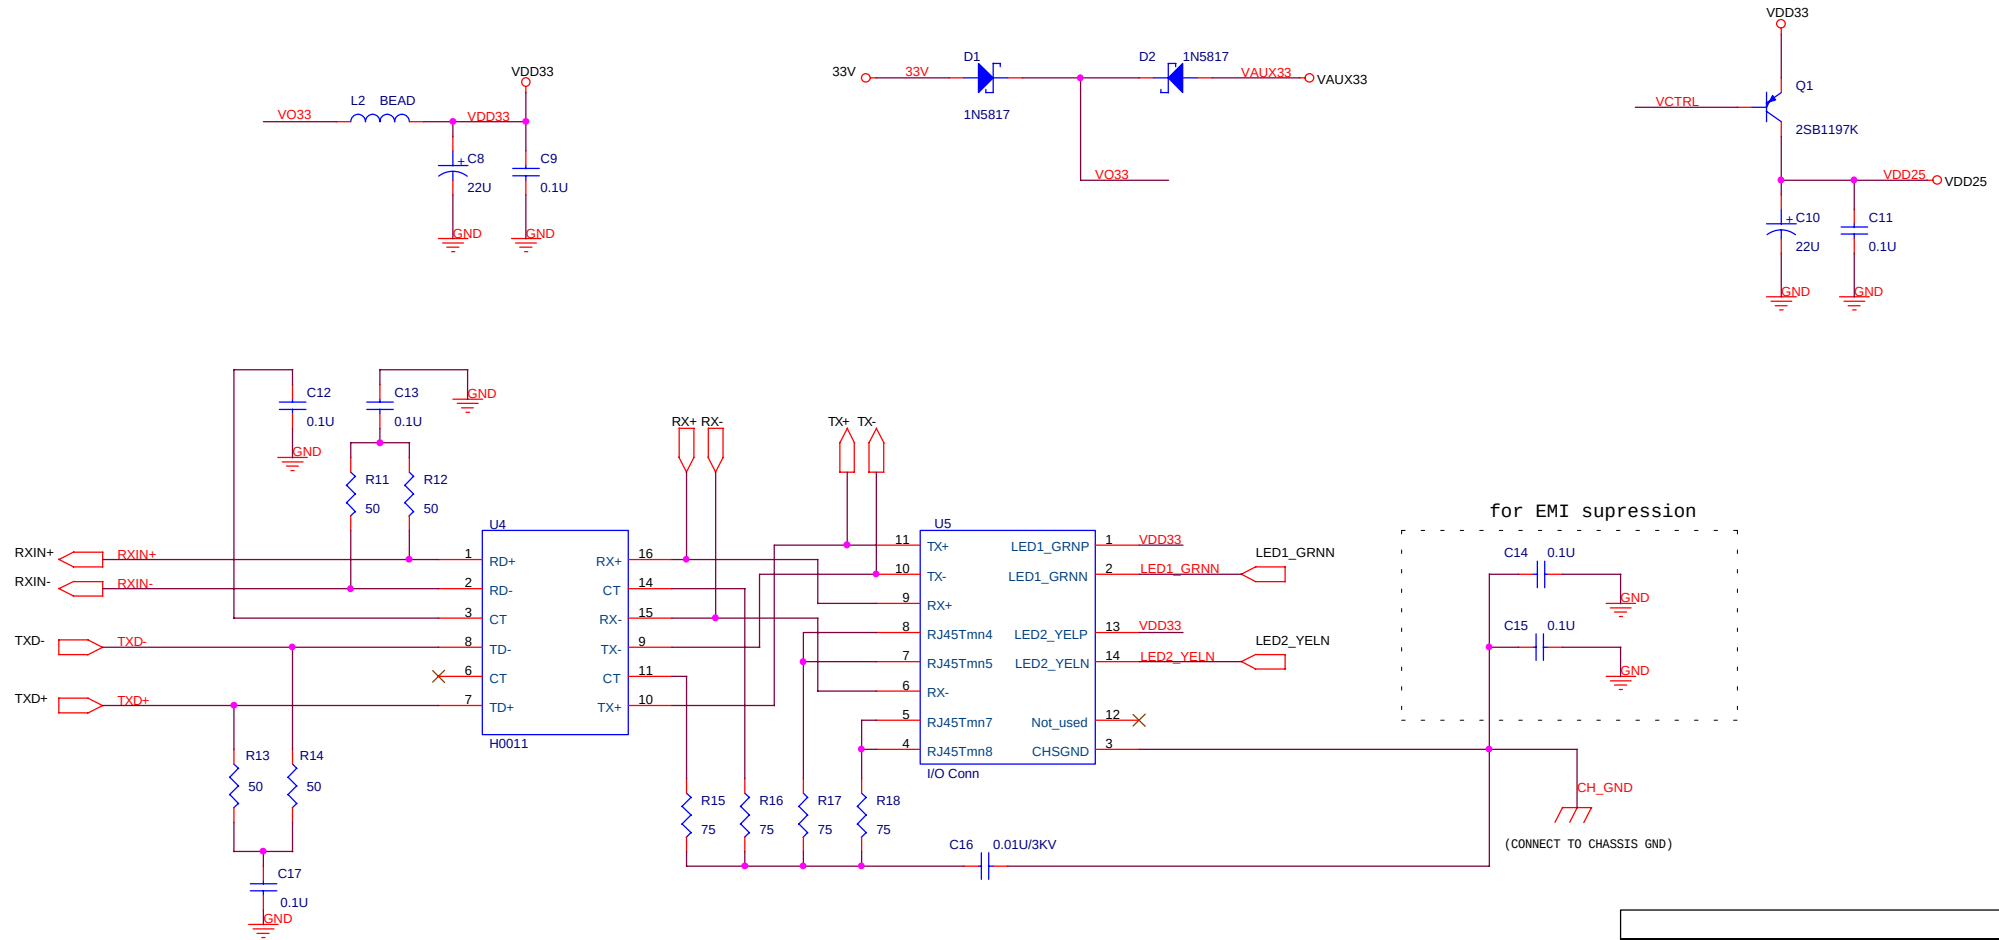

Title		
Realtek RTL8100BL MiniPCI BOARD		
Size	Document Number	Rev
B	Mini8100BL	1.10
Date:	Friday, November 09, 2001	Sheet 2 of 3